



# CorePro GLASS LED candles and lustres



# CorePro LEDCandle ND6.5-60W B35E14827CLG

Featuring a classic heritage design, these filament LED candles combine the familiar shapes of classic incandescent bulbs with the benefits of long-lasting LED technology. The LED candle bulb is a very easy choice for people who are looking for a retrofit LED replacement, it provides 90% energy savings compared with conventional lamps. CorePro Glass LED bulbs provide excellent quality of light for stairway lighting. The LED candle bulb offers a lifetime of 15,000 hours to reduce maintenance costs.

### **Product data**

General Information	
Cap base	E14
Nominal lifetime	15,000 h
Switching Cycle	20,000
Lighting Technology	LED
Flux measurement reference	Sphere
Light Technical	
Colour Code	827 [CCT of 2700K]
Luminous Flux	806 lm
Luminous efficacy (rated) (nom.)	124.00 lm/W
Colour designation	Warm White (WW)
Correlated Colour Temperature	2700 K
Colour consistency	<6
Colour rendering index (CRI)	80
LLMF at end of nominal lifetime (nom.)	70 %
Flickering value (PstLM)	1
Stroboscopic effect	0.9

Photobiological safety according to EN 62471 RG1		
Operating and Electrical		
Line Frequency	50 to 60 Hz	
Input frequency	50 to 60 Hz	
Power Consumption	6.5 W	
Lamp current (nom.)	50 mA	
Wattage equivalent	60 W	
Starting time (nom.)	0.5 s	
Warm-up time to 60% light	0.5 s	
Power Factor (Fraction)	0.55	
Voltage (nom.)	220-240 V	
Temperature		
T-Case maximum (nom.)	55 ℃	


Datasheet, 2023, April 14 data subject to change

# CorePro GLASS LED candles and lustres

Controls and Dimming	
Controts and Dimining	
Dimmable	No
Mechanical and Housing	
Lamp Finish	Clear
Bulb shape	B35
Approval and Application	
Energy Efficiency Class	E
Energy consumption kWh/1,000 hours	7 kWh
EPREL registration number	1825170
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
	·
<b>Application Conditions</b>	
Can it be used in closed luminaires	No


CorePro LEDCandle ND6.5-60W
B35E14827CLG
CorePro LEDCandle ND6.5-60W
B35E14827CLG
871951434746500
34746500
929002028092
1
0.012 kg
8719514347465
10
8719514347472

# Dimensional drawing




Product	D	С
CorePro LEDCandle ND6.5-60W B35E14827CLG	35 mm	97 mm

### Photometric data




Light Distribution Diagram - CorePro LEDCandle ND6.5-60W B35E14827CLG

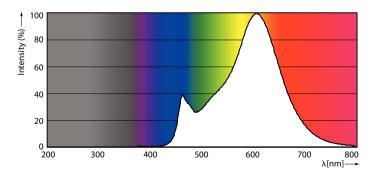

Spectral Power Distribution Colour - CorePro LEDCandle ND6.5-60W B35E14827CLG

# CorePro GLASS LED candles and lustres


### Photometric data




Calculus Photometrics 4.5 Philips Lighting Sci. Page: 177

General uniform lighting - CorePro LEDCandle ND6.5-60W B35E14827CLG

### Lifetime

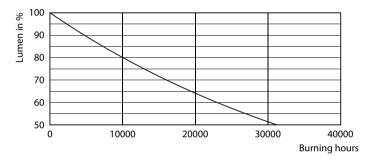

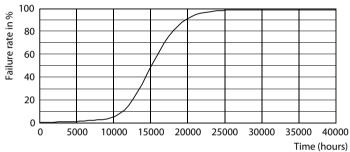

Lumen Maintenance Diagram - CorePro LEDCandle ND6.5-60W B35E14827CLG Life Expectancy Diagram



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.