


Product Code: CMA3020

Description: 10A 3 Pole Fan Isolation Plate Switch With 3A Fuse

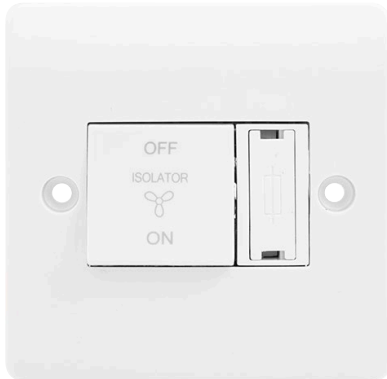

General Information

Plate Dimensions (mm)	86 (W) x 86 (H) x 9.5 (D)	
Plate Fixing Centres - Horizontal (mm)	60.3	
MiniGrid Plate (Gang)	1	
MiniGrid Single Width Module Quantity	3	
MiniGrid Double Width Module Quantity	1	
Style	Rounded Profile	
Finish	Polar White	
Materials	Front Plate & Rocker Switch: Urea Rear Housing: Nylon Terminal Screws: Steel & Yellow Passivated Internal Busbars: Formed Pressed Brass	FCU Front: Nylon Terminals: Brass Contacts: Silver "on-lay" Copper / Brass Fuse: BS 1362 (3A)
Anti Microbial Certified	Yes	
Rated Voltage (V~) (Ue)	250	Frequency (Hz) 50
Resistive Load Rating (A)	3	
Rated Conditional Short-Circuit Current (Iq)	1500A	
Fuse Fitted Rating & Type	3A (BS 1362)	
Termination Type	Screw	
Terminal Size (mm)	Ø3.5	Terminal Torque Value (Nm) 0.4
Terminal Capacity - Solid (mm²)	4 x 1.5 or 2 x 2.5	
Modular Rocker Switches	Yes	
Triple Pole Switch	Yes	
Product Marking	Isolator, On, Off, Fuse	
Minimum Back Box Depth (mm)	25	
Ingress Protection	IP20	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	20	

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth. Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases as well as anti-viral properties against enveloped and non-enveloped viruses. All products have been independently tested with 99.9% of enveloped viruses and 92% of non-enveloped viruses killed off whilst achieving a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.