



NSK24

CHEMICAL RESISTANT DUAL NITRILE GAUNTLET

A flexible impermeable knit-lined nitrile glove providing grip and protection from an array of solvents, oils and acids.

FEATURES

- › Double nitrile coating provides excellent chemical, oil and abrasion resistance
- › Cotton/polyester liner absorbs perspiration, for ultra-comfortable extended wear and with good mechanical resistance
- › Protects the hand and forearm from oils, hydrocarbons, grease and abrasion
- › Resists Hydrochloric Acid (37%) - Level 6 breakthrough time EN374
- › Impermeable for working in damp or greasy environments
- › Scalloped edge
- › Rough textured finish over surface of hand
- › Suitable for food handling
- › Wrist well protected
- › Length: 350mm (14inch)
- › Also available in 650mm (26inch): NSK 26



SUITABLE FOR

Typical Industries

- Agriculture
- Chemical
- Construction
- Food
- Manufacturing
- Municipal Services
- Oil and Gas

Suitable Applications

- Agro-Chemicals
- Chemical Handling
- Handling Paints
- Handling Fluid-Coated Components
- Handling Oils
- Industrial Tool Maintenance
- Refining

CERTIFICATION

CAT III	EN 388:2016	EN ISO 374-1:2016/Type A	EN ISO 374-5:2016	
2777	4112X	JKLOPT		

See overleaf for explanation





NSK24

PRODUCT INFORMATION

MATERIALS	LINER:	Cotton, polyester
	COATING:	Nitrile
COLOUR	Royal blue	
LENGTH (mm)	350	
CUFF STYLE	Gauntlet	

ORDERING DETAILS

SIZE	CODE	PACKAGING
8/S	BSTNSK241	12 pairs per bag 72 pairs per case
9/M	BSTNSK242	
10/L	BSTNSK243	
11/XL	BSTNSK244	


RECOMMENDATIONS FOR USE

- **USE:** Chemical resistant glove. Not suitable for thermal, electrical and cut protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

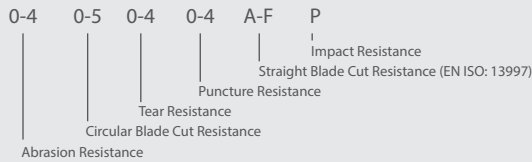

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



PROTECTION AGAINST MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604: 2004 (method B)



FOOD CONTACT DIRECTIVE EC 10/2011



RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

CODE	CHEMICAL	CODE	CHEMICAL	TYPE OF GLOVES	BREAKTHROUGH TIME
A	Methanol	J	n-Heptane	A	≥30 min for at least 6 chemicals
B	Acetone	K	Sodium hydroxide 40%		
C	Acetonitrile	L	Sulphuric acid 96%	B	≥30 min for at least 3 chemicals
D	Dichloromethane	M	65% Nitric acid		
E	Carbon Disulfide	N	99% Acetic acid	C	≥10 min for at least 1 chemical
F	Toluene	O	25% Ammonium hydroxide		
G	Diethylamine	P	30% Hydrogen peroxide		
H	Tetrahydrofurane	S	40% Hydrofluoric acid		
I	Ethyl acetate	T	37% Formaldehyde		

EUROPE

www.globusgroup.com

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

©2021 Globus (Shetland) Ltd | SHO-DATA-NSK24_0621_1