

CUT RESISTANT DURACOIL LINER 3/4 COATED NITRILE

Foamed nitrile over ¾ dipped nitrile coating, over engineered DURACOIL liner reinforced with HPPE.

FEATURES

- › Cut resistant: Level C (EN 388:2016) / ANSI/ISEA 105-16: A3
- › Increased cut resistance performance due to engineered DURACOIL wrapping technology
- › ¾ Liquid-proof nitrile to protect the hand from oils and keep the hands dry
- › Foamed nitrile coating on palm provides an optimal grip performances in oily or wet conditions
- › High level of flexibility and dexterity due to advanced grip technology
- › Seamless knit to prevent irritation
- › Unique SHOWA ergonomic shape that replicates the natural curve of the human hand for enhanced dexterity and longer use
- › High abrasion resistance level 4



SUITABLE FOR

Typical Industries

- Aerospace
- Automotive
- Construction
- Engineering
- Glass
- Manufacturing
- Mechanical

Suitable Applications

- Light assembly of oil-coated pieces
- Glass & window handling
- Mechanical and engineering
- Dry & oily parts assembly
- Heavy equipment handling
- Canning
- Mounting & dismantling

CERTIFICATION

CAT II

EN 388:2016



4X42C

See overleaf for explanation

**576****PRODUCT INFORMATION**

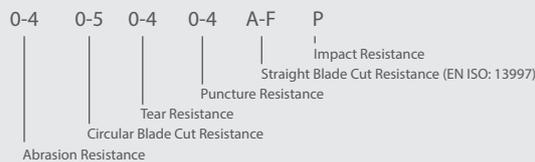
MATERIALS	LINER:	13 gauge HPPE, Engineered yarn, polyester
	COATING:	Foam nitrile over nitrile
COLOUR	Grey/black	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

RECOMMENDATIONS FOR USE

- **USE:** Cut resistant glove. Not suitable for thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

ORDERING DETAILS

SIZE	CODE	PACKAGING
6/S	SHO5761	10 pairs per bag 120 pairs per case
7/M	SHO5762	
8/L	SHO5763	
9/XL	SHO5764	

CERTIFICATION LEGENDSMECHANICAL HAZARDS EN 388:2016
PERFORMANCE LEVELS*

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

EUROPEwww.globusgroup.com

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICAwww.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

©2020 Globus (Shetland) Ltd | SHO-DATA-576_0620_1