

**LIGHTWEIGHT PALM-COATED LATEX GLOVE WITH CUT PROTECTION**

Lightweight with a high level of cut resistance and thermal resistance to 100°C for short contact. Great grip in wet and dry handling conditions.

**FEATURES**

- › Supple and lightweight (13 gauge) para-aramid, mixed fibre liner provides level D cut resistance (EN 388:2016)
- › Very good durability and resistance to contact heat up to 100°C
- › Blended with Spandex for comfort, ergonomic fit and dexterity
- › Crinkle latex palm coating finish offers optimum wet and dry grip
- › Sanitized® antimicrobial finish provides extra freshness
- › Wrist well protected



**SUITABLE FOR**

**Typical Industries**

- Aerospace
- Automotive
- Construction
- Glass
- Steel and Metals

**Suitable Applications**

- Glass Handling
- Metal Fabrication
- Metallurgy
- Paper Manufacturing
- Plastics Manufacturing

**CERTIFICATION**

CAT II	EN 388:2016	EN 407:2004	ASTM / ANSI 105-2016
		3X42D	X1XXXX
			CUT

See overleaf for explanation

**PRODUCT INFORMATION**

<b>MATERIALS</b>	LINER:	13 gauge aramid, glass fibre, nylon
	COATING:	Latex
<b>COLOUR</b>	Yellow/Black	
<b>LENGTH (mm)</b>	250 (size dependent)	
<b>CUFF STYLE</b>	Elasticated knit wrist	

**ORDERING DETAILS**

SIZE	CODE	PACKAGING
7/S	SKY1011	10 pairs per bag 120 pairs per case
8/M	SKY1012	
9/L	SKY1013	
10/XL	SKY1014	
11/XXL	SKY1015	


**RECOMMENDATIONS FOR USE**

- **USE:** General handling glove with cut protection. Not suitable for high thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use
- **WARNING:** Latex may cause allergies

**CERTIFICATION LEGENDS**




MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS\*

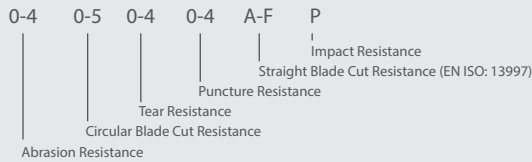

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



HEAT AND FIRE EN 407

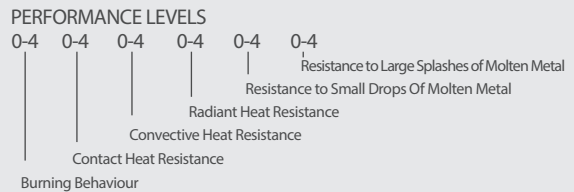

**CLASSIFICATION FOR CUT RESISTANCE**

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

**EUROPE**

[www.globusgroup.com](http://www.globusgroup.com)

**E:** sales@globus.co.uk  
**T:** +44 (0)161 877 4747  
**F:** +44 (0)161 877 4746

**MIDDLE EAST AND AFRICA**

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** gcc@globusgroup.com  
**T:** +971 4 882 9962  
**F:** +971 4 882 9963

**GLOBUS AMERICAS**

[www.globusgroup.com](http://www.globusgroup.com)

**E:** americas@globusgroup.com



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES  
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA