



CUT PROTECTION

**TONS TP-3****CUT RESISTANT GLOVE WITH POLYURETHANE PALM COATING**

From the TONS range, with good overall mechanical resistance and a good level of cut protection.

**FEATURES**

- › Cut resistant: Level B (EN 388:2016)
- › Durable palm coating resists rips and abrasion
- › Excellent grip in dry handling conditions
- › Allows excellent freedom of hand movement
- › Flexible and close-fitting design for a comfortable wearing experience
- › Breathable and lightweight
- › Knitwrist cuff style




VENDING  
MACHINE  
COMPATIBLE

**SUITABLE FOR****Typical Industries**

- Automotive
- Construction
- General Handling
- Logistics
- Maintenance
- Waste Management

**Suitable Applications**

- Assembly
- Goods Handling
- Handling Components with Sharp Edges
- Light Fabrication
- Maintenance

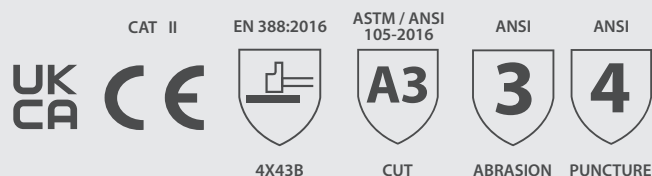**CERTIFICATION**

See overleaf for explanation





## TONS TP-3

## PRODUCT INFORMATION

MATERIALS	LINER:	13 gauge HPPE, nylon
	COATING:	Polyurethane (PU)
COLOUR	Grey / Grey	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

## RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use


## ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS	TNS0400	10 pairs per bag 120 pairs per case
7/S	TNS0401	
8/M	TNS0402	
9/L	TNS0403	
10/XL	TNS0404	
11/XXL	TNS0405	

## CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016  
PERFORMANCE LEVELS\*

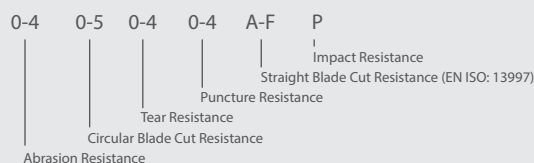

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

## CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

## ANSI/ISEA 105-2016 ABRASION RATING CHART

Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

## ANSI/ISEA PUNCTURE RESISTANCE

ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

## EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

E: [sales@globus.co.uk](mailto:sales@globus.co.uk)

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

## MIDDLE EAST AND AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

E: [gcc@globusgroup.com](mailto:gcc@globusgroup.com)

T: +971 4 882 9962

F: +971 4 882 9963

## GLOBUS AMERICAS

[www.globusgroup.com](http://www.globusgroup.com)

E: [americas@globusgroup.com](mailto:americas@globusgroup.com)



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES  
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA