






# RILEY®

## REON

### Adjustable face shield rated for high energy impacts

The Reon face shield provides the wearer with 'Class A' face protection. High energy impact resistance to EN 166 'Level A' means that the face shield protects against impacts up to 19m/s (425mph). REON also outperforms for comfort & vision clarity.

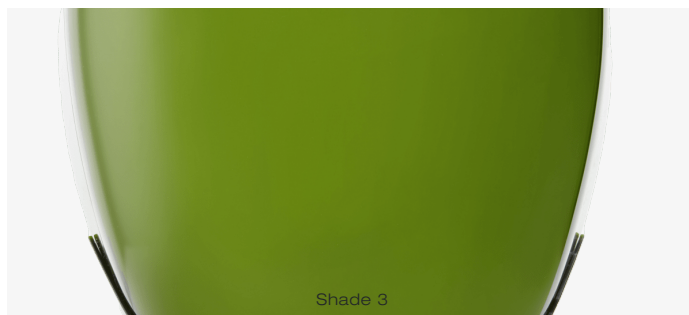

PANORAMIC  
VISION

### FEATURES

- + Fitted chinguard
- + Ratchet adjustment allows for a secure fit to a range of head sizes
- + Padded headband for a comfortable fit
- + Adjustable pivot for wearer to select optimum angle
- + Frameless design for a wide, unrestricted field of vision
- + Level A impact resistance - the highest attainable level under EN166

#### Europe

sales@globus.com  
+44 (0)161 877 4747  
+44 (0)161 877 4746

#### Middle East & Africa

sales.gcc@globusgroup.com  
+971 4 882 9962  
+971 4 882 9963

#### Americas

salesusa@globusgroup.com  
+1 83 337 54747



# RILEY | REON

| LENS TYPE                                                                                 | REF      | LENS MARKING   | FRAME MARKING | PROTECTS AGAINST                           | COATINGS                                                                                         |
|-------------------------------------------------------------------------------------------|----------|----------------|---------------|--------------------------------------------|--------------------------------------------------------------------------------------------------|
|                                                                                           | RLY00352 |                |               | Impacts,UV Radiation,Molten Metal          |                                                                                                  |
| CLEAR    | RLY00351 | 2C-1.2 1 AT    |               | Impacts,UV Radiation,Molten Metal          |  Anti-Fog     |
| CLEAR    | RLY00355 | 2C-1.2 1 FT    |               | Impacts,UV Radiation                       |                                                                                                  |
| SHADE 5  | RLY00354 | 5 1 B CE / 1 3 |               | Impacts,UV Radiation,Molten Metal,Infrared |  Anti-Scratch |
| SHADE 3  | RLY00353 | 3 1 B CE       |               | Impacts,UV Radiation,Molten Metal,Infrared |                                                                                                  |

## GENERAL SPECIFICATION

|        |      |
|--------|------|
| WEIGHT | 360g |
|--------|------|

## PACKAGING

|          |    |
|----------|----|
| PER CASE | 20 |
|----------|----|

## COMPONENT SPECIFICATION

| COMPONENT | MATERIAL      |
|-----------|---------------|
| LENS      | Polycarbonate |
| HINGE     | Metal         |

## ADDITIONAL INFORMATION

[CERTIFICATION LEGEND](#)[or click here](#)[DECLARATION OF CONFORMITY](#)[or click here](#)[VIEW PRODUCT ONLINE](#)[or click here](#)

### Europe

sales@globus.com  
+44 (0)161 877 4747  
+44 (0)161 877 4746

### Middle East & Africa

sales.gcc@globusgroup.com  
+971 4 882 9962  
+971 4 882 9963

### Americas

salesusa@globusgroup.com  
+1 83 337 54747

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES  
Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment.  
The manufacturer reserves the right to make any modifications it deems necessary. Published date: 26/11/2025

