


Combining advanced ergonomics, permanent comfort and peak performance, AGERA™ incorporates durable nylon and lightweight TPE to offer stylish protection for permanent wear.

## SPECIAL FEATURES

- ✓ Single wide vision lens
- ✓ Sports style frame
- ✓ Carbon fibre effect frame
- ✓ Ventilated, non-slip TPE universal fit nose bridge
- ✓ Co-injected bi-colour frame
- ✓ TPE temples give excellent, comfortable grip to the head
- ✓ Supplied with a microfibre storage pouch
- ✓ Weight: 29g
- ✓ 9-Base Lens

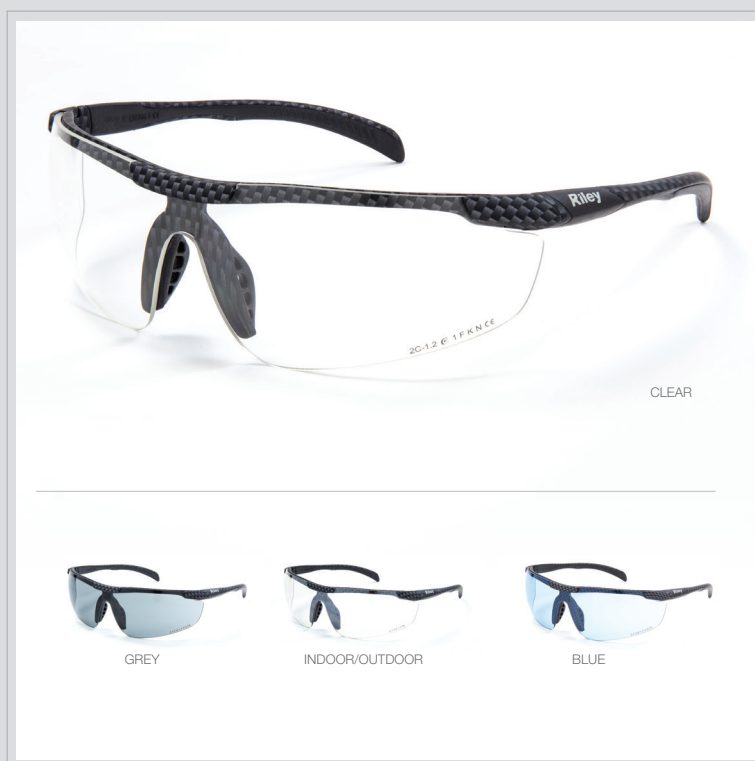

VERSIONS	REF.	LENS MARKING	FRAME MARKING	PROTECTION AGAINST	COATINGS
CLEAR	○ RLY00011	2C-1.2 e 1FKN CE	e EN 166 F CE	Impacts, UV radiations	
GREY	● RLY00012	5-2.5 e 1FKN CE	e EN 166 F CE	Impacts, UV and Solar radiations	TECTON 400™ K&N Anti-scratch and Anti-fog / UV400 / moisture repellent
BLUE	● RLY00014	2-1.4 e 1FKN CE	e EN 166 F CE	Impacts, UV radiations	
INDOOR/OUTDOOR	◐ RLY00013	2-1.4 e 1F CE	e EN 166 F CE	Impacts, UV radiations	ARIDA™ Moisture Repellent + Anti-fog

See overleaf for this product's technical specification →

## GENERAL SPECIFICATION

LENS BASE	9mm
WEIGHT	29g

## PACKAGING

Individually contained in a polythene bag with a Eurosot

PER BOX	10
PER CARTON	200

## COMPONENT SPECIFICATION

COMPONENT	MATERIAL	FEATURES
LENS	Polycarbonate	One piece, moulded
NOSE BRIDGE	Thermoplastic Elastomers (TPE)	Ventilated
TEMPLE	TR90 Thermoplastic/ Thermoplastic Elastomers (TPE)	Co-injected - Durable, flexible and lightweight
HINGE	TR90 Thermoplastic/ Metal	Increased strength


## LENS MARKINGS

### LENS FILTER TYPE:

2, 2C UV  
5 Solar

### SCALE NUMBER (SHADE):

1.2 Clear or Amber  
1.4 Blue or I/O Waterproof  
2.5 Grey

 Identity of the manufacturer

### OPTICAL CLASS:

1 High optical quality


### MECHANICAL STRENGTH:

F Low energy impact, resists a 6mm, 0.86g ball at 45m/s

### PERFORMANCE:

K Resistance to scratches by fine particles  
N Resistance to fogging  
CE Certification mark

## FRAME MARKINGS

 Identity of the manufacturer

**EN 166:** guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc.

### MECHANICAL STRENGTH:

F Low energy impact, resists a 6mm, 0.86 g ball at 45 m/s

 Certification mark

## CLEANING AND STORAGE

**CLEANING:** The lenses should be cleaned regularly.

**MAINTENANCE:** Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfibre pouch or rigid case.

**STORAGE:** All products must be stored in a dry and clean environment.

## PART OF THE GLOBUS GROUP

Based on a substantial heritage of successfully protecting hands, Globus has grown to become one of the world leaders in worker safety, leading the way in technical innovation to provide a range of products that have set the standard for safety, productivity and wearer acceptance.

This focus on creating cutting edge personal protection solutions has now extended to eye and face protection with Riley; a new collection of high performance protective eyewear products engineered with innovation and ingenuity, designed for optimum comfort and styled for safe working.

Riley product approval certificates to CE standards will be provided on request. Riley is a registered trademark.

[www.riley-eyewear.com](http://www.riley-eyewear.com)

E: [info@riley-eyewear.com](mailto:info@riley-eyewear.com)

T: +44 (0)161 877 4747

F: +44(0)161 877 4746

Globus (Shetland) Ltd, 14 Central Park, Mosley Road, Manchester, M17 1NY, UNITED KINGDOM

EC-Type certification issued by:  
0530: CERTOTTICA SCARL, Zona Industriale Villanova, 32013 - Longarone (BL), Italy  
The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment.  
The manufacturer reserves the right to make any modifications it deems necessary.

