

**DURABLE, OIL-RESISTANT, TRIPLE-DIPPED PVC GLOVE WITH EXTENDED CUFF**

SKYTEC CH102 features a soft comfortable cotton lining and a rough textured PVC coating that ensures grip in contact with oils and chemicals. Extended cuff to protect the entire arm.

FEATURES

- › A flexible, soft glove that absorbs perspiration, for ultra comfortable extended wear and with good mechanical resistance
- › Seals and protects the hand against chemicals while remaining flexible
- › Impermeable for working in damp or greasy environments, enabling you to grip objects securely
- › Excellent abrasion resistance (EN388 Level 4)
- › Surface provides tactile feel and better grip
- › Designed for easy movement and continuous wear
- › No irritation by seams in contact with the skin
- › Arm entirely protected with the extended cuff
- › Thickness: 1.3mm

**OIL GRIP****SUITABLE FOR****Typical Industries**

- Agriculture
- Automotive
- Chemical
- Construction
- Petrochemical
- Public Utilities

Suitable Applications

- Commercial Fishing
- Chemical Handling
- Decontamination Work
- Dipping
- Drain/Sewer Cleaning
- Engine Servicing

CERTIFICATION

CAT III



0598

EN 388:2016 + A1:2018



4121X

EN ISO 374-1:2016/Type B



JKL

EN ISO 374-5:2016



See overleaf for explanation

PRODUCTION INFORMATION

MATERIALS	LINER:	Cotton
	COATING:	PVC
COLOUR	Dark blue	
LENGTH (mm)	600 (Size dependant)	
CUFF STYLE	Gauntlet	

ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SKG00069DD	12 pairs per bag
8/M	SKG00069DF	
9/L	SKG00069DH	
10/XL	SKG00069DJ	48 pairs per case
11/XXL	SKG00069DL	


RECOMMENDATIONS FOR USE

- **USE:** Chemical resistant glove. Not suitable for thermal, electrical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016
PERFORMANCE LEVELS*

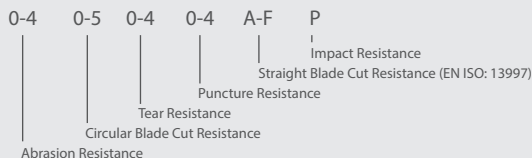

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



PROTECTION AGAINST
MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604: 2004 (method B)



RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

CODE	CHEMICAL	CODE	CHEMICAL	TYPE OF GLOVES	BREAKTHROUGH TIME
A	Methanol	J	n-Heptane	A	≥30 min for at least 6 chemicals
B	Acetone	K	Sodium hydroxide 40%		
C	Acetonitrile	L	Sulphuric acid 96%	B	≥30 min for at least 3 chemicals
D	Dichloromethane	M	65% Nitric acid		
E	Carbon Disulfide	N	99% Acetic acid	C	≥10 min for at least 1 chemical
F	Toluene	O	25% Ammonium hydroxide		
G	Diethylamine	P	30% Hydrogen peroxide		
H	Tetrahydrofuran	S	40% Hydrofluoric acid		
I	Ethyl acetate	T	37% Formaldehyde		

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by CTC, 4 rue Hermann Frenkel 69367 Lyon cedex 07 FRANCE. (Notified Body No. 0075)