

ESD NITRILE CHEMICAL RESISTANT GAUNTLET

SKYTEC CH201 features a lightweight unsupported nitrile gauntlet with electro static discharge properties (ESD)

FEATURES

- › Soft and flexible nitrile
- › Specially formulated glove to dissipate static charge, complies with EN 16350:2014
- › Free from external conductive connections and adjustment systems
- › Anti-slip pattern for good grip in wet and dry conditions
- › Unlined to reduce risk of lint contamination
- › Resistant to a wide variety of chemicals and solvents
- › Straight cuff
- › Length: 30cm
- › Thickness: 0.38mm



SUITABLE FOR


Typical Industries

- Automotive
- Chemical
- Public Utilities
- Pharmaceutical
- Manufacturing

Suitable Applications

- Cleaning
- Degreasing
- Oil Refining
- Spill Response
- Paint Spraying
- Powder handling

CERTIFICATION

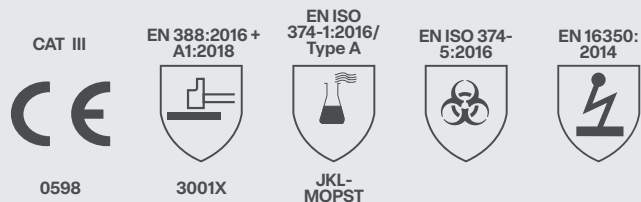

See overleaf for explanation

PRODUCTION INFORMATION

MATERIALS	LINER:	Unsupported, unlined
	COATING:	Nitrile
COLOUR	Black	
LENGTH (mm)	300 (Size dependant)	
CUFF STYLE	Gauntlet	

ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SKG00070BD	10 pairs per bag
8/M	SKG00070BF	
9/L	SKG00070BH	
10/XL	SKG00070BJ	120 pairs per case
11/XXL	SKG00070BL	


RECOMMENDATIONS FOR USE

- **USE:** Chemical resistant glove. Not suitable for thermal, electrical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016
PERFORMANCE LEVELS*

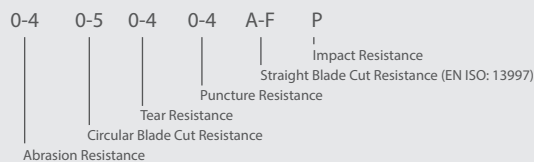

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



PROTECTION AGAINST
MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604: 2004 (method B)



RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

CODE	CHEMICAL	CODE	CHEMICAL	TYPE OF GLOVES	BREAKTHROUGH TIME
A	Methanol	J	n-Heptane	A	≥30 min for at least 6 chemicals
B	Acetone	K	Sodium hydroxide 40%		
C	Acetonitrile	L	Sulphuric acid 96%	B	≥30 min for at least 3 chemicals
D	Dichloromethane	M	65% Nitric acid		
E	Carbon Disulfide	N	99% Acetic acid	C	≥10 min for at least 1 chemical
F	Toluene	O	25% Ammonium hydroxide		
G	Diethylamine	P	30% Hydrogen peroxide		
H	Tetrahydrofuran	S	40% Hydrofluoric acid		
I	Ethyl acetate	T	37% Formaldehyde		

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15YN2P, Republic of Ireland. (Notified Body No. 2777).