

**UNLINED PVA/NITRILE CHEMICAL RESISTANT GLOVE**

SKYTEC CH601 features a revolutionary technology combining a nitrile and modified hydrophobic PVA layer. Outstanding chemical protection against some of the most harmful chemicals.

FEATURES

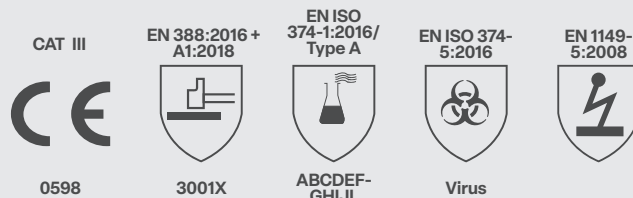
- › Advanced outer PVA layer protects from Ketones, diluted solvents, aliphatic, aromatic hydrocarbons.
- › Inner nitrile layer for enhanced chemical protection
- › The combination of both material offers outstanding protection against Acetone, MEK, Toluene, acetonitriles
- › Anatomically shaped fingers providing superior comfort leading to less fatigue
- › Low thickness allows higher dexterity and excellent tactility
- › Excellent alternative to Butyl glove against many harmful chemicals
- › Provides anti-static properties
- › Limited protection in contact with water or water-based chemicals
- › Unlined, smooth finish
- › Length: 33cm
Thickness: 0.28mm

**SUITABLE FOR****Typical Industries**

- Chemical
- Automotive
- Petrochemicals
- Laboratories
- Printing

Suitable Applications

- Metal treatment using solvents
- Handling harmful chemicals
- Aircraft engineering applications
- Cleaning operations

CERTIFICATION

See overleaf for explanation



PRODUCTION INFORMATION

MATERIALS	LINER:	Unlined
	COATING:	PVA over nitrile
COLOUR	Blue	
LENGTH (mm)	330 (Size dependant)	
CUFF STYLE	Gauntlet	

ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SKG00072DD	Each pair individually bagged, 10 pairs per bag
8/M	SKG00072DF	
9/L	SKG00072DH	
10/XL	SKG00072DJ	
11/XXL	SKG00072DL	60 pairs per case

RECOMMENDATIONS FOR USE

- **USE:** Chemical resistant glove. Not suitable for thermal, electrical, cut protection. Do not use near moving machines if there is a risk of entanglement.
- **CAUTION:** recommended time for direct contact with water is 10 minutes. Recommended time for diluted solvents is approx 30 minutes.
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

0-4	0-5	0-4	0-4	A-F	P
Abrasion Resistance		Circular Blade Cut Resistance		Puncture Resistance	Impact Resistance
				Straight Blade Cut Resistance (EN ISO: 13997)	

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



PROTECTION AGAINST MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604: 2004 (method B)



RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

CODE	CHEMICAL	CODE	CHEMICAL	TYPE OF GLOVES	BREAKTHROUGH TIME
A	Methanol	J	n-Heptane	A	≥30 min for at least 6 chemicals
B	Acetone	K	Sodium hydroxide 40%		
C	Acetonitrile	L	Sulphuric acid 96%	B	≥30 min for at least 3 chemicals
D	Dichloromethane	M	65% Nitric acid		
E	Carbon Disulfide	N	99% Acetic acid	C	≥10 min for at least 1 chemical
F	Toluene	O	25% Ammonium hydroxide		
G	Diethylamine	P	30% Hydrogen peroxide		
H	Tetrahydrofuran	S	40% Hydrofluoric acid		
I	Ethyl acetate	T	37% Formaldehyde		

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15YN2P, Republic of Ireland. (Notified Body No. 2777).