



FLOCKLINED CHLOROPRENE CHEMICAL RESISTANT GLOVE WITH AN EMBOSSED GRIP

SKYTEC CH402 features a flexible Chloroprene chemical resistant glove featuring high chemical protection against a wide range of chemicals. Good alternative to nitrile against some specific chemicals.

FEATURES

- › Chloroprene protects against a wide variety of chemicals including acids, caustics, solvents, grease and oil
- › Honeycomb finish on palm enhances grip properties in all conditions
- › Flocklined for extra comfort and sweat absorption
- › Impermeable for working in damp or oily environments
- › Forearm well protected
- › Length: 30cm
- › Thickness: 0.75mm



SUITABLE FOR


Typical Industries

- Automotive
- Chemical
- Offshore
- Oil and Gas
- Petrochemicals
- Transport

Suitable Applications

- Chemical Handling
- Handling Oily Components
- Refining

CERTIFICATION

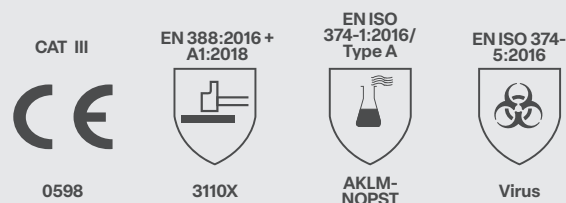

See overleaf for explanation



PRODUCTION INFORMATION

MATERIALS	LINER:	Cotton flock
	COATING:	CHLOROPRENE
COLOUR	Black	
LENGTH (mm)	300 (Size dependant)	
CUFF STYLE	Gauntlet	

RECOMMENDATIONS FOR USE

- USE: Chemical resistant glove. Not suitable for thermal, electrical, cut protection. Do not use near moving machines if there is a risk of entanglement
- STORAGE: Store in dry conditions in the original packaging and away from direct sunlight
- CLEANING: To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- LIFETIME: Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SKG00074BD	10 pairs per bag
8/M	SKG00074BF	
9/L	SKG00074BH	
10/XL	SKG00074BJ	60 pairs per case
11/XXL	SKG00074BL	

CERTIFICATION LEGENDS

MECHANICAL HAZARDS EN 388:2016
PERFORMANCE LEVELS*

0-4	0-5	0-4	0-4	A-F	P
Abrasion Resistance		Circular Blade Cut Resistance	Tear Resistance	Puncture Resistance	Impact Resistance
Straight Blade Cut Resistance (EN ISO: 13997)					

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

PROTECTION AGAINST
MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604: 2004 (method B)



RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

CODE	CHEMICAL	CODE	CHEMICAL	TYPE OF GLOVES	BREAKTHROUGH TIME
A	Methanol	J	n-Heptane	A	≥30 min for at least 6 chemicals
B	Acetone	K	Sodium hydroxide 40%		
C	Acetonitrile	L	Sulphuric acid 96%	B	≥30 min for at least 3 chemicals
D	Dichloromethane	M	65% Nitric acid		
E	Carbon Disulfide	N	99% Acetic acid	C	≥10 min for at least 1 chemical
F	Toluene	O	25% Ammonium hydroxide		
G	Diethylamine	P	30% Hydrogen peroxide		
H	Tetrahydrofuran	S	40% Hydrofluoric acid		
I	Ethyl acetate	T	37% Formaldehyde		

GLOBUS

EUROPE

www.globusgroup.comE: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gccE: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.comE: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15YN2P, Republic of Ireland. (Notified Body No. 2777).