

**FLOCKLINED CHLOROPRENE OVER NATURAL RUBBER CHEMICAL RESISTANT GLOVE WITH AN EMBOSSED GRIP**

SKYTEC CH301 features a multi layer chloroprene over natural rubber latex chemical resistant glove offering long lasting grip, comfort and chemical protection against various chemicals.

FEATURES

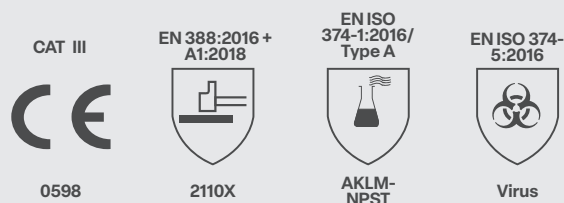
- › The combination of Natural rubber with Chloroprene allows high chemical protection and flexibility
- › Honeycomb finish on palm enhances grip properties in all conditions
- › Flocklined for extra comfort and sweat absorption
- › Resistant to a broad range of chemicals
- › Impermeable for working in damp environments
- › Forearm well protected
- › Length: 30cm
- › Thickness: 0.60mm

**SUITABLE FOR****Typical Industries**

- Aerospace
- Automotive
- Chemical
- Manufacturing

Suitable Applications

- Acid Components
- Assembly
- Battery Manufacturing
- Chemical Processing
- Pesticide Maintenance
- Printing Maintenance

CERTIFICATION

See overleaf for explanation

PRODUCTION INFORMATION

MATERIALS	LINER:	Cotton flock
	COATING:	Chloroprene over natural rubber
COLOUR	Blue/Yellow	
LENGTH (mm)	300 (Size dependant)	
CUFF STYLE	Gauntlet	

ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS	SKG00075DB	10 pairs per bag
7/S	SKG00075DD	
8/M	SKG00075DF	120 pairs per case
9/L	SKG00075DH	
10/XL	SKG00075DJ	

RECOMMENDATIONS FOR USE

- **USE:** Chemical resistant glove. Not suitable for thermal, electrical, cut protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016
PERFORMANCE LEVELS*

0-4	0-5	0-4	0-4	A-F	P
Abrasion Resistance		Circular Blade Cut Resistance		Impact Resistance	
		Tear Resistance		Straight Blade Cut Resistance (EN ISO: 13997)	
				Puncture Resistance	

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



PROTECTION AGAINST
MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604: 2004 (method B)



RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

CODE	CHEMICAL	CODE	CHEMICAL	TYPE OF GLOVES	BREAKTHROUGH TIME
A	Methanol	J	n-Heptane	A	≥30 min for at least 6 chemicals
B	Acetone	K	Sodium hydroxide 40%		
C	Acetonitrile	L	Sulphuric acid 96%	B	≥30 min for at least 3 chemicals
D	Dichloromethane	M	65% Nitric acid		
E	Carbon Disulfide	N	99% Acetic acid	C	≥10 min for at least 1 chemical
F	Toluene	O	25% Ammonium hydroxide		
G	Diethylamine	P	30% Hydrogen peroxide		
H	Tetrahydrofuran	S	40% Hydrofluoric acid		
I	Ethyl acetate	T	37% Formaldehyde		

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15YN2P, Republic of Ireland. (Notified Body No. 2777).