

UNLINED NATURAL RUBBER CHEMICAL RESISTANT GLOVE, 450MM LONG

SKYTEC CH302 features an heavyweight natural rubber chemical resistant glove with a long cuff (45cm)

FEATURES

- › Thick natural rubber resists to water-based chemicals
- › Beaded cuff improves tear resistance during donning and removal and also helps prevent droplets from travelling beyond the glove length
- › Chlorination treatment to clean and harden the outer surface
- › Excellent flexibility and elasticity to prevent potential tears
- › Impermeable for working in damp environments
- › Long cuff to protect the forearm and upper arm from chemical projections
- › Light contact heat protection up to 100°C / 212°F
- › Length: 45cm
- › Thickness: 1.3mm



SUITABLE FOR


Typical Industries

- Agriculture
- Janitorial
- Construction
- Maintenance
- Chemical

Suitable Applications

- Chemical processing and preparation
- Heavy duty chemical handling
- Maintenance of plant
- Spraying

CERTIFICATION

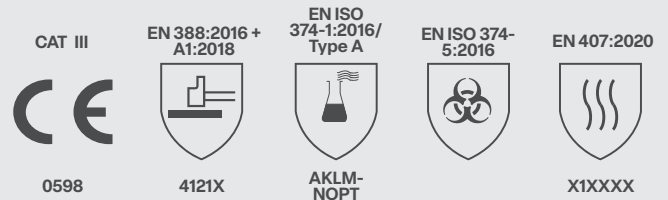

See overleaf for explanation

PRODUCTION INFORMATION

MATERIALS	LINER:	Unsupported, unlined
	COATING:	Natural rubber
COLOUR	Black	
LENGTH (mm)	450 (Size dependant)	
CUFF STYLE	Gauntlet	

ORDERING DETAILS

SIZE	CODE	PACKAGING
9/L 10/XL 11/XXL	SKG00076BH SKG00076BJ SKG00076BL	6 pairs per bag 36 pairs per case


RECOMMENDATIONS FOR USE

- **USE:** Chemical resistant glove. Not suitable for thermal, electrical, cut protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

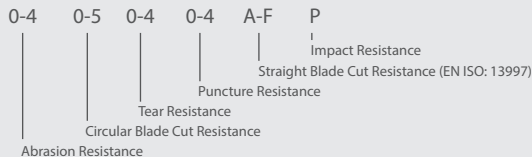


*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



HEAT AND FIRE EN 407

PERFORMANCE LEVELS

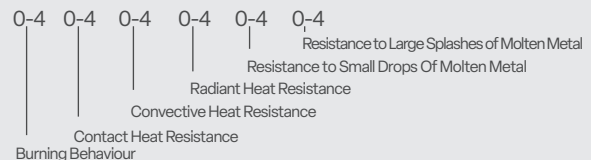

RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

CODE	CHEMICAL	CODE	CHEMICAL	TYPE OF GLOVES	BREAKTHROUGH TIME
A	Methanol	J	n-Heptane	A	≥30 min for at least 6 chemicals
B	Acetone	K	Sodium hydroxide 40%		
C	Acetonitrile	L	Sulphuric acid 96%		
D	Dichloromethane	M	65% Nitric acid	B	≥30 min for at least 3 chemicals
E	Carbon Disulfide	N	99% Acetic acid		
F	Toluene	O	25% Ammonium hydroxide		
G	Diethylamine	P	30% Hydrogen peroxide	C	≥10 min for at least 1 chemical
H	Tetrahydrofuran	S	40% Hydrofluoric acid		
I	Ethyl acetate	T	37% Formaldehyde		



PROTECTION AGAINST MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604: 2004 (method B)

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15V2P, Republic of Ireland. (Notified Body No. 2777).