



RECYCLED POLYESTER MULTI PURPOSE GLOVE WITH RECYCLED NITRILE FOAM COATING

A new revolution in sustainable gloves with SKYTEC ECO STEEL, first general purpose gloves 100% made with recycled materials (liner and coating).

FEATURES

- › Soft and lightweight liner made of 100% recycled polyester
- › Flexible and durable recycled nitrile foam coating provides a secure grip and an excellent abrasion resistance
- › Ultra fine coating for maximum tactile sensitivity
- › Packed by 10 pairs in a Recycled paper wrap
- › GRS (Global Recycled Standard) certified
- › Close-fitting liner for a comfortable wearing experience
- › Elasticated wrist provides a secure fit
- › 1 pair = 2 PET bottle of 500ml recycled



SUITABLE FOR

Typical Industries

- Aerospace
- Automotive
- Construction
- Logistics
- Manufacturing
- Retail

Suitable Applications

- Handling of Machined Parts Coated with Oil
- Maintenance
- Mechanical Assembly
- Operating Machinery
- Warehouse Work
- Gardening

CERTIFICATION



See overleaf for explanation



PRODUCT INFORMATION

MATERIALS	LINER:	15g recycled polyester
	COATING:	Recycled foam nitrile
COLOUR	Green/grey	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

RECOMMENDATIONS FOR USE

- **USE:** General handling glove. Not suitable for thermal (beyond 100C / 212F), electrical or chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use


ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS	SKG00098EB	10 pairs per paper wrap
7/S	SKG00098ED	
8/M	SKG00098EF	
9/L	SKG00098EH	
10/XL	SKG00098EJ	120 pairs per case
11/XXL	SKG00098EL	

CERTIFICATION LEGENDS




MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

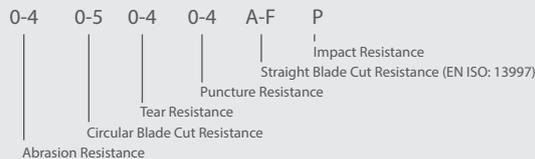

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



HEAT AND FIRE EN 407

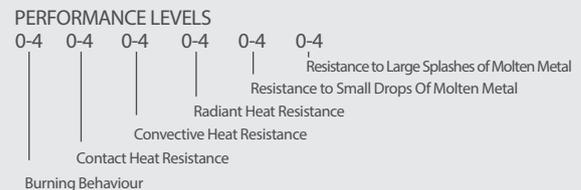

ANSI/ISEA PUNCTURE RESISTANCE

ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

Puncture Resistance (ANSI/ISEA 105): Puncture resistance is determined by the max force that it takes, exerted from a probe, to puncture the fabric.

ANSI/ISEA 105-2016 ABRASION RATING CHART

Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by CCQS Certification Services Limited, Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin, D15 AKK1, Ireland (Notified Body No 2834)
 UKCA Type-Examination Certificate issued by CCQS UK Ltd, 25 Wilton Rd, Pimlico, London SW1V 1LW, United Kingdom. [UK Approved Body No. 1105].

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.