



# RILEY®

## REON



### Adjustable face shield rated for high energy impacts

The Reon face shield provides the wearer with 'Class A' face protection. High energy impact resistance to EN 166 'Level A' means that the face shield protects against impacts up to 19m/s (425mph). REON also outperforms for comfort & vision clarity.

CLEAR

SHADE 3

SHADE 5

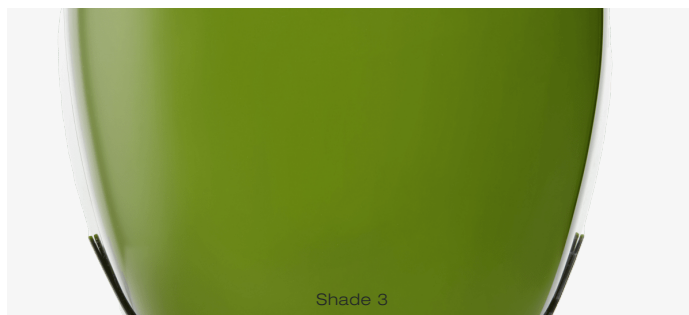

### FEATURES

- + Fitted chinguard
- + Ratchet adjustment allows for a secure fit to a range of head sizes
- + Padded headband for a comfortable fit
- + Adjustable pivot for wearer to select optimum angle
- + Frameless design for a wide, unrestricted field of vision
- + Level A impact resistance - the highest attainable level under EN166

#### Europe







sales@globus.com  
+44 (0)161 877 4747  
+44 (0)161 877 4746

#### Middle East & Africa

sales.gcc@globusgroup.com  
+971 4 882 9962  
+971 4 882 9963

#### Americas

salesusa@globusgroup.com  
+1 83 337 54747

LENS TYPE	REF	LENS MARKING	FRAME MARKING	PROTECTS AGAINST	COATINGS
	RLY00352			Impacts,UV Radiation,Molten Metal	
CLEAR 	RLY00351	2C-1.2 1 AT		Impacts,UV Radiation,Molten Metal	
CLEAR 	RLY00355	2C-1.2 1 FT		Impacts,UV Radiation	
SHADE 5 	RLY00354	5 1 B CE / 1 3		Impacts,UV Radiation,Molten Metal,Infrared	
SHADE 3 	RLY00353	3 1 B CE		Impacts,UV Radiation,Molten Metal,Infrared	

## GENERAL SPECIFICATION

WEIGHT	240g
--------	------

## PACKAGING

PER BOX	1
PER CASE	20

## COMPONENT SPECIFICATION

COMPONENT	MATERIAL
LENS	Polycarbonate
HINGE	Metal

## ADDITIONAL INFORMATION

CERTIFICATION LEGEND



or click [here](#)

DECLARATION OF CONFORMITY



or click [here](#)

VIEW PRODUCT ONLINE



or click [here](#)

### Europe

sales@globus.com  
+44 (0)161 877 4747  
+44 (0)161 877 4746

### Middle East & Africa

sales.gcc@globusgroup.com  
+971 4 882 9962  
+971 4 882 9963

### Americas

salesusa@globusgroup.com  
+1 83 337 54747