



## NATURAL LATEX COATING GRIP GLOVE WITH RECYCLED YARNS

Environment conscious grip glove made with recycled yarns and crinkle latex on palm. Ideal for heavy duty manual handling.

### FEATURES

- › Sustainable liner containing 44% recycled yarns (25% recycled polyester and 19% recycled cotton) / 56% virgin cotton
- › Crinkle latex palm ensures high grip performances
- › Flexible, robust glove offering great dexterity
- › Excellent resistance to abrasion, tearing and light cut protection
- › Breathable back of hand reduces perspiration
- › Contact Heat Resistant up to 250°C/482°F
- › 1 pair = 1PET bottle of 1 litre recycled
- › RCS (Recycled Claim Standard) certified



### SUITABLE FOR

#### Typical Industries

- Construction
- Highway maintenance
- Logistics
- Municipal services
- Heavy engineering
- Retail / gardening

#### Suitable Applications

- Bricklaying
- Maintenance
- Manual handling
- Refuse collection
- Scaffolding

### CERTIFICATION

CAT II



EN388:2016 + A1:2018



3142B

EN407:2020



X2XXXX

ANSI/ISEA 105



See overleaf for explanation

**PRODUCTION INFORMATION**

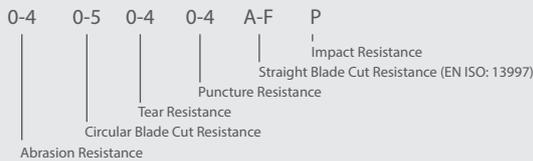
<b>MATERIALS</b>	LINER:	25% recycled polyester, 19% recycled cotton, 56% virgin cotton
	COATING:	Crinkle latex
<b>COLOUR</b>	Beige/khaki	
<b>LENGTH (mm)</b>	250 (size dependent)	
<b>CUFF STYLE</b>	Elasticated knit wrist	

**ORDERING DETAILS**

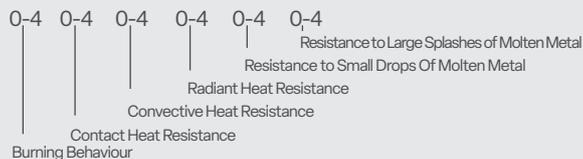
SIZE	CODE	PACKAGING
7/S	SKG00036ED	6 pairs per pack
8/M	SKG00036EF	
9/L	SKG00036EH	
10/XL	SKG00036EJ	
11/XXL	SKG00036EL	60 pairs per case

**RECOMMENDATIONS FOR USE**

- **USE:** General handling glove. Not suitable for high contact heat (beyond 250°C/482°F), electrical or chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

**CERTIFICATION LEGENDS****MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS\***

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

**HEAT AND FIRE EN 407****PERFORMANCE LEVELS**

CLASSIFICATION FOR CUT RESISTANCE	
Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

**GLOBUS****EUROPE**[www.globusgroup.com](http://www.globusgroup.com)**E:** [sales@globus.co.uk](mailto:sales@globus.co.uk)**T:** +44 (0)161 877 4747**F:** +44 (0)161 877 4746**MIDDLE EAST & AFRICA**[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)**E:** [gcc@globusgroup.com](mailto:gcc@globusgroup.com)**T:** +971 4 882 9962**F:** +971 4 882 9963**GLOBUS AMERICAS**[www.globusgroup.com](http://www.globusgroup.com)**E:** [americas@globusgroup.com](mailto:americas@globusgroup.com)

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES  
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15YN2P, Republic of Ireland. (Notified Body No. 2777).