



# Eco Chrome™

## FULLY COATED NITRILE GLOVE WITH RECYCLED POLYESTER LINER

Fully coated nitrile with a nitrile foam palm and 100% rPET liner. Excellent grip in wet and oily conditions as well as oil and water submersion.

### FEATURES

- › A flexible, robust glove with 100% recycled polyester (rPET)
- › Protects the hand from water, oils, hydrocarbons, grease and abrasion, with optimal long lasting grip
- › Touchscreen capabilities to allow usage with screen devices
- › Contact heat protection up to 100°C for a short period (15 sec max)
- › Close-fitting liner for a comfortable wearing experience
- › Designed for easy movement and continuous wear
- › Elasticated wrist provides a secure fit
- › RCS (Recycled Claim Standard) certified
- › 1 pair = 2 PET bottles of 500ml recycled
- › 39g of CO<sub>2</sub> reduced vs virgin polyester alternative



### SUITABLE FOR


#### Typical Industries

- Aerospace
- Automotive
- Construction
- Engineering
- Manufacturing
- Oil and Gas

#### Suitable Applications

- Concreting
- Handling Oily Components
- Maintenance
- Oil Submersion
- Painting
- Wet Work

### CERTIFICATION

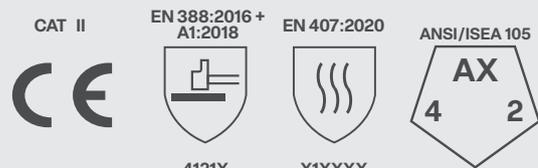

See overleaf for explanation



# Eco Chrome™

## PRODUCTION INFORMATION

MATERIALS	LINER:	15 gauge 100% recycled polyester (rPET)
	COATING:	Foam nitrile over nitrile
COLOUR	Blue/black	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

## ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS	SKG00047BB	10 pairs per paper wrap
7/S	SKG00047BD	
8/M	SKG00047BF	
9/L	SKG00047BH	
10/XL	SKG00047BJ	120 pairs per case
11/XXL	SKG00047BL	


## RECOMMENDATIONS FOR USE

- USE: General handling glove. Not suitable for thermal up to 100C, electrical or chemical protection. Do not use near moving machines if there is a risk of entanglement
- STORAGE: Store in dry conditions in the original packaging and away from direct sunlight
- CLEANING: To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- LIFETIME: Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

## CERTIFICATION LEGENDS



### MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS\*

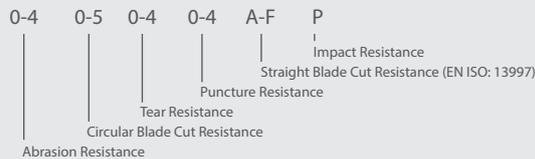


\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



### HEAT AND FIRE EN 407

#### PERFORMANCE LEVELS

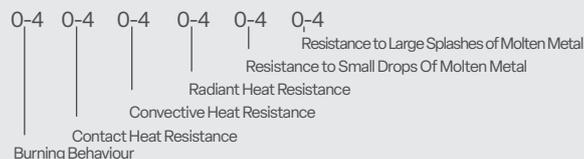

### ANSI/ISEA 105-2016 ABRASION RATING CHART

Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

### ANSI/ISEA PUNCTURE RESISTANCE

ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

Puncture Resistance (ANSI/ISEA 105): Puncture resistance is determined by the max force that it takes, exerted from a probe, to puncture the fabric.

## GLOBUS

### EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

E: [sales@globus.co.uk](mailto:sales@globus.co.uk)

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

### MIDDLE EAST & AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

E: [gcc@globusgroup.com](mailto:gcc@globusgroup.com)

T: +971 4 882 9962

F: +971 4 882 9963

### GLOBUS AMERICAS

[www.globusgroup.com](http://www.globusgroup.com)

E: [americas@globusgroup.com](mailto:americas@globusgroup.com)

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES  
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

© 2023 Globus (Shetland) Ltd | SKY-DATA-CHROME-1123,1

EU Type-Examination Certificate issued by CCQS Certification Services Limited, Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin, D15 AKK1, Ireland (Notified Body No 2834)  
 UKCA Type-Examination Certificate issued by CCQS UK Ltd, 25 Wilton Rd, Pimlico, London SW1V 1LW, United Kingdom. [UK Approved Body No. 1105].

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.