



CUT PROTECTION



SAPPHIRE SILVER™

MEDIUM CUT RESISTANCE AND EXCELLENT GRIP IN DRY AND GREASY CONDITIONS

Affordable medium cut resistant glove with spun HPPE offering a high degree of comfort and dexterity. PU coating protects the hand from grease delivering effective long lasting grip.

FEATURES

- › Cut resistant: Level B / A2
- › A flexible and comfortable glove offering great dexterity
- › Durable polyurethane palm coating ensures good protection against abrasion
- › Breathable back of hand to reduce perspiration
- › Seamless knit prevents irritation
- › Elasticated wrist provides a secure fit



SUITABLE FOR

Typical Industries

- Aerospace
- Automotive
- Construction
- Manufacturing
- Railways
- Transport

Suitable Applications

- Bottling/Canning
- Mechanical Inspection
- Metal Fabrication
- Paint Spraying

CERTIFICATION



CAT II

EN 388:2016
+ A1:2018

4X42B

ASTM / ANSI
105-2016

CUT

See overleaf for explanation



SAPPHIRE SILVER™

PRODUCTION INFORMATION

MATERIALS	LINER:	13 gauge HDPE, glass fibre, nylon
	COATING:	Polyurethane (PU)
COLOUR	Grey	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

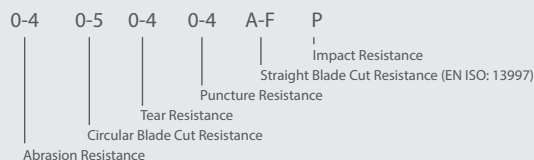
RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SKG00078FD	10 pairs per paper wrap
8/M	SKG00078FF	
9/L	SKG00078FH	
10/XL	SKG00078FJ	120 pairs per case
11/XXL	SKG00078FL	

CERTIFICATION LEGENDS

MECHANICAL HAZARDS EN 388:2016
PERFORMANCE LEVELS*

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

© 2023 Globus (Shetland) Ltd | SKY-DATA-SAPP-SILVER-0523_1