

## ORANGE SINGLE-USE GLOVE WITH GRIP PATTERN, 100% NITRILE, POWDER- FREE, 240MM LONG

High performance, powder-free, orange, nitrile, single-use glove with patented TRXON grip pattern technology. Provides outstanding grip performances and chemical protection.

### FEATURES

- › High-quality nitrile, soft and durable
- › Palm thickness 0.18mm (7mil), weight: 7.5g, size M
- › High resistance to penetration and projections of many chemicals
- › Patented TRXON grip pattern technology on both side offering outstanding grip properties in all conditions
- › Powder-free, latex-free, non-sterile, AQL 1.5
- › Chlorinated inside to offer increased comfort and reduce friction when donning
- › Anti-static properties due to inherent anti-static properties of nitrile
- › Lasts up to 5 times longer than regular single-use gloves in industrial applications
- › Ambidextrous for easy and quick donning



### SUITABLE FOR


#### Typical Industries

- Aerospace
- Chemical
- Electronics
- Automotive
- Manufacturing
- Oil and Gas

#### Suitable Applications

- Chemical Handling
- Handling Oily Components
- Light Assembly
- Engineering
- Repair and Finishing

### CERTIFICATION

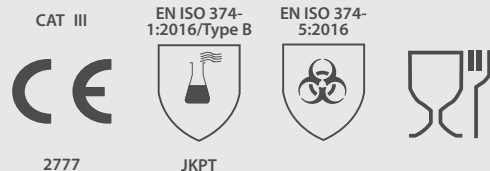

See overleaf for explanation

## PRODUCT INFORMATION

MATERIALS	LINER:	Nitrile
	COATING:	N/A
COLOUR	Orange	
LENGTH (mm)	240	
CUFF STYLE	Beaded	

## ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SKG00725GD	100 singles per box (90 singles on size XXL)
8/M	SKG00725GF	
9/L	SKG00725GH	
10/XL	SKG00725GJ	
11/XXL	SKG00725GL	10 boxes per case

## RECOMMENDATIONS FOR USE

- **USE:** Single use glove. Not suitable for mechanical, thermal, heat, electrical, heavy chemical protection. Do not use near moving machines if there is a risk of entanglement.
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use.

## CERTIFICATION LEGENDS



### RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

CODE	CHEMICAL	CODE	CHEMICAL	TYPE OF GLOVES	BREAKTHROUGH TIME
A	Methanol	J	n-Heptane	A	≥30 min for at least 6 chemicals
B	Acetone	K	Sodium hydroxide 40%		
C	Acetonitrile	L	Sulphuric acid 96%	B	≥30 min for at least 3 chemicals
D	Dichloromethane	M	65% Nitric acid		
E	Carbon Disulfide	N	99% Acetic acid	C	≥10 min for at least 1 chemical
F	Toluene	O	25% Ammonium hydroxide		
G	Diethylamine	P	30% Hydrogen peroxide		
H	Tetrahydrofuran	S	40% Hydrofluoric acid		
I	Ethyl acetate	T	37% Formaldehyde		



### FOOD CONTACT DIRECTIVE EC 10/2011



### PROTECTION AGAINST MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604:2004 (method B)

## EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [sales@globus.co.uk](mailto:sales@globus.co.uk)  
**T:** +44 (0)161 877 4747  
**F:** +44 (0)161 877 4746

## MIDDLE EAST AND AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** [gcc@globusgroup.com](mailto:gcc@globusgroup.com)  
**T:** +971 4 882 9962  
**F:** +971 4 882 9963

