

## ACCELERATOR FREE SINGLE USE GLOVE, 100% NITRILE, POWDER FREE, 240MM LONG, 0.11MM THICK

High performance accelerator free nitrile single use glove for people sensitive to accelerators used in standard nitrile single use gloves.

### FEATURES

- › High quality nitrile, soft and durable
- › Palm thickness 0.11mm (4.5 mil), weight : 5.4g size M
- › Accelerator free to avoid skin irritation to people sensitive to accelerators contained in standard nitrile single use gloves
- › Textured finish for improved grip and touch
- › Powder-free, latex free, non-sterile, AQL 1.5
- › Chlorinated inside to offer more comfort and reduce friction when donning
- › Antistatic properties due to inherent antistatic properties of nitrile



### SUITABLE FOR


#### Typical Industries

- Aerospace
- Chemical
- Electronics
- Pharmaceutical
- Manufacturing
- Oil and Gas
- Repair and Finishing

#### Suitable Applications

- Chemical Handling
- Handling Oily Components
- Laboratory Analysis
- Light Assembly
- Paint Spraying

### CERTIFICATION

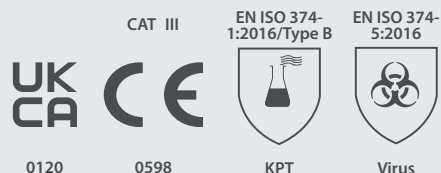

See overleaf for explanation

## PRODUCT INFORMATION

MATERIALS	LINER:	Accelerator free nitrile
	COATING:	
COLOUR	Green	
LENGTH (mm)	240	
CUFF STYLE	Beaded	

## ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS	SKG04525EB	100 singles per box
7/S	SKG04525ED	
8/M	SKG04525EF	
9/L	SKG04525EH	10 boxes per case
10/XL	SKG04525EJ	
11/XXL	SKG04525EL	

## RECOMMENDATIONS FOR USE

- **USE:** Single use glove. Not suitable for mechanical, thermal, heat, electrical, heavy chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE :** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

## CERTIFICATION LEGENDS



### RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

CODE	CHEMICAL	CODE	CHEMICAL	TYPE OF GLOVES	BREAKTHROUGH TIME
A	Methanol	J	n-Heptane	A	≥30 min for at least 6 chemicals
B	Acetone	K	Sodium hydroxide 40%		
C	Acetonitrile	L	Sulphuric acid 96%		
D	Dichloromethane	M	65% Nitric acid	B	≥30 min for at least 3 chemicals
E	Carbon Disulfide	N	99% Acetic acid		
F	Toluene	O	25% Ammonium hydroxide		
G	Diethylamine	P	30% Hydrogen peroxide	C	≥10 min for at least 1 chemical
H	Tetrahydrofuran	S	40% Hydrofluoric acid		
I	Ethyl acetate	T	37% Formaldehyde		



### PROTECTION AGAINST MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604:2004 (method B)

## EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [sales@globus.co.uk](mailto:sales@globus.co.uk)

**T:** +44 (0)161 877 4747

**F:** +44 (0)161 877 4746

## MIDDLE EAST AND AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** [gcc@globusgroup.com](mailto:gcc@globusgroup.com)

**T:** +971 4 882 9962

**F:** +971 4 882 9963

