



CUT PROTECTION



SAPPHIRE TOTAL

OIL RESISTANT, WATER REPELLENT, CUT RESISTANT GRIP GLOVE

A great fitting, fully coated glove combining high cut and excellent grip in oily and wet conditions. Ideal for oily tasks with sharp parts that require great grip.

FEATURES

- › A flexible, robust glove offering great dexterity
- › Fully coated to protect the hand from oils, hydrocarbons, grease and abrasion, with optimal long lasting grip
- › Extremely comfortable and great fitting
- › Water repellent for working in damp or oily environments
- › Designed for easy movement and continuous wear
- › No irritation by seams in contact with the skin
- › Elasticated wrist provides a secure fit



SUITABLE FOR


Typical Industries

- Automotive
- Construction
- Public Works
- Transportation
- Waste Management
- Oil and Gas
- Manufacturing

Suitable Applications

- Pipe Handling
- Sharp and Oily Parts Handling
- Concreting
- Oil Submersion
- Wet Work

CERTIFICATION

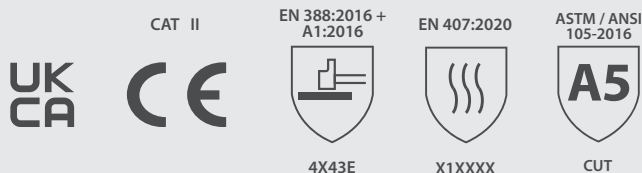

See overleaf for explanation





SAPPHIRE TOTAL

PRODUCT INFORMATION

MATERIALS	LINER:	13 gauge HPPE, Steel fibre, nylon, spandex
	COATING:	Double coated sandy finish nitrile over nitrile
COLOUR	Black/Black	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	


RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SKY00121	10 pairs per bag 120 pairs per case
8/M	SKY00122	
9/L	SKY00123	
10/XL	SKY00124	
11/XXL	SKY00125	

CERTIFICATION LEGENDS

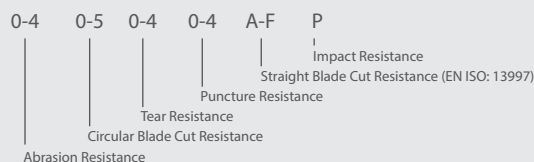MECHANICAL HAZARDS EN 388:2016
PERFORMANCE LEVELS*


*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

HEAT AND FIRE
EN 407

PERFORMANCE LEVELS

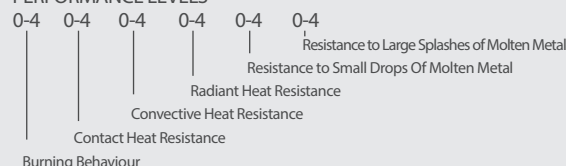

EUROPE

www.globusgroup.com

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

©2022 Globus (Shetland) Ltd | SKY-DATA-SAPP-TOTAL-1222_1