



NINJA FLEX™

LATEX GRIP GLOVE WITH A LIGHTWEIGHT LINER FOR A SUPER THIN FEEL

The seamless lightweight liner and latex coating maintain an overall superthin feel for enhanced dexterity, fit and comfort. For manual handling in damp and dry conditions.

FEATURES

- › The lightweight nylon/lycra liner (15 gauge) maintains a superthin 'feel' for improved dexterity, fit and comfort
- › Anatomically designed for high levels of comfort and tactile touch
- › Abrasion and rip resistant
- › Excellent grip in both wet and dry environments
- › Silicone and lint free
- › Seamless liner prevents irritation



DURABLE LATEX GRIP



Sanitized Actifresh



LIGHTWEIGHT 13gg LINER



Part of the Tricolore Range™

SUITABLE FOR

Typical Industries

- Construction
- Engineering
- Logistics
- Municipal Services
- Transport

Suitable Applications

- Assembly
- Final Fix
- Light Engineering
- Precision Operations

CERTIFICATION

CAT II

EN 388:2016



2131X

See overleaf for explanation





NINJA FLEX™

SUITABLE FOR

MATERIALS	LINER:	13 gauge nylon
	COATING:	Natural Latex
COLOUR	Red/Grey	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

RECOMMENDATIONS FOR USE

- **USE:** General handling glove. Not suitable for thermal, electrical or chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use
- **WARNING:** Latex may cause allergies


ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SKY191	10 pairs per bag
8/M	SKY192	120 pairs per case
9/L	SKY193	
10/XL	SKY194	

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016
PERFORMANCE LEVELS*

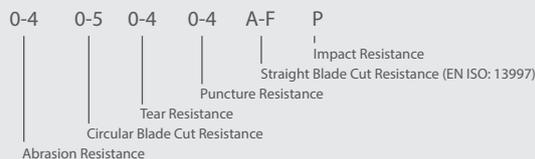

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

EUROPE

www.globusgroup.com

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

© 2022 Globus (Shetland) Ltd | SKY-DATA-NINJA-FLEX-0422_1