



CUT PROTECTION

**NINJA SILVER+™**

CUT RESISTANCE AND EXCELLENT GRIP IN OILY AND DRY CONDITIONS

Excellent cut resistance whilst maintaining a high degree of comfort and dexterity. PU coating protects the hand from oils and grease delivering effective long lasting grip.

FEATURES

- › Cut resistant: Level C (EN 388:2016)
- › Excellent grip in wet, oily or dry conditions
- › High durability resistance to rips and abrasion
- › Glove retains flexibility despite its high protection levels
- › Machine knitted liners made with High Performance Polyethylene and glass yarn to provide a good cut resistance barrier, while offering dexterity and comfort
- › Coated with polyurethane on palm up to fingers
- › Breathable liner helps keep hands cool



SUITABLE FOR


Typical Industries

- Aerospace
- Automotive
- Construction
- Manufacturing
- Railways
- Transport

Suitable Applications

- Bottling/Canning
- Mechanical Inspection
- Metal Fabrication
- Paint Spraying

CERTIFICATION

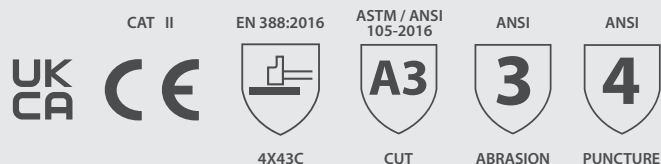

See overleaf for explanation





NINJA SILVER+™

PRODUCT INFORMATION

MATERIALS	LINER:	13 gauge HPPE, glass fibre, nylon
	COATING:	Polyurethane (PU)
COLOUR	Grey	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	


RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS	SKY290	10 pairs per bag 120 pairs per case
7/S	SKY291	
8/M	SKY292	
9/L	SKY293	
10/XL	SKY294	

CERTIFICATION LEGENDS

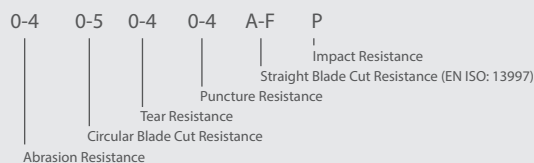MECHANICAL HAZARDS EN 388:2016
PERFORMANCE LEVELS*

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

ANSI/ISEA 105-2016 ABRASION RATING CHART

Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

ANSI/ISEA PUNCTURE RESISTANCE

ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

EUROPE

www.globusgroup.com

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

© 2022 Globus (Shetland) Ltd | SKY-DATA-NINJA-SILVER-PLUS-0722_1