



CUT PROTECTION

**SKYTEC®****CIRRUS™**

## SUPPLE AND LIGHTWEIGHT WITH CUT RESISTANCE AND PU PALM

Offers dexterity and comfort with good resistance to cuts, rips and punctures. The thin polyurethane coating allows components and materials to be handled precisely.

### FEATURES

- › Cut resistant: Level B (EN 388:2016)
- › Supple and lightweight
- › Extremely durable
- › Offers outstanding flexibility with a tactile touch
- › Excellent grip in both dry and damp environments
- › Anatomically designed for comfort, dexterity and fit
- › Coated with polyurethane on palm up to fingers
- › Sanitized® antimicrobial finish provides extra freshness



### SUITABLE FOR


#### Typical Industries

- Aerospace
- Automotive
- Construction
- Engineering
- Glass
- Manufacturing

#### Suitable Applications

- Bottling or Canning
- Component Assembly
- Packaging
- Second Fix
- Warehousing and Distribution

### CERTIFICATION

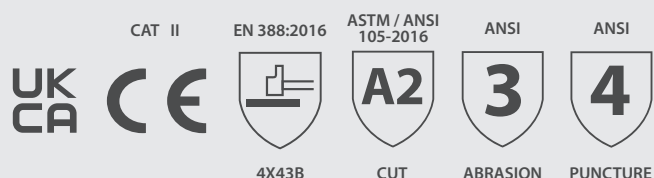

See overleaf for explanation

**Globus®**  
GROUP



## PRODUCT INFORMATION

MATERIALS	LINER:	13 gauge HPPE, nylon
	COATING:	Polyurethane (PU)
COLOUR	Grey	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

## RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

## ORDERING DETAILS

SIZE	CODE	PACKAGING	VEND COMPATIBLE OPTION	
			CODE	PACKAGING
7/S	SKY461	10 pairs per bag	SKYV461	120 individually bagged pairs per case
8/M	SKY462		SKYV462	
9/L	SKY463		SKYV463	
10/XL	SKY464	120 pairs per case	SKYV464	
11/XXL	SKY465		SKYV465	

## CERTIFICATION LEGENDS



## MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS\*



\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

## CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

## ANSI/ISEA 105-2016 ABRASION RATING CHART

Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

## ANSI/ISEA PUNCTURE RESISTANCE

ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

## EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

E: [sales@globus.co.uk](mailto:sales@globus.co.uk)

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

## MIDDLE EAST AND AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

E: [gcc@globusgroup.com](mailto:gcc@globusgroup.com)

T: +971 4 882 9962

F: +971 4 882 9963

## GLOBUS AMERICAS

[www.globusgroup.com](http://www.globusgroup.com)

E: [americas@globusgroup.com](mailto:americas@globusgroup.com)



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES  
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

©2023 Globus (Shetland) Ltd | SKY-DATA-CIRRUS-0523\_1