


**FLEXIBLE POLYURETHANE (PU) PALM WITH CUT RESISTANCE**

G3PU is a supple and lightweight glove offering a good cut resistant barrier whilst maintaining dexterity and comfort. The flexible PU coating enables a secure grip in light oil and dry conditions. Ideal for handling small components with sharp edges.

**FEATURES**

- › Cut resistant: Level B (EN 388:2016)
- › Machine knitted liner constructed using HPPE fibres blended with nylon
- › Flexible polyurethane (PU) palm
- › Excellent abrasion and tear resistance
- › Ventilated to keep hands cool
- › Sanitized® antimicrobial finish provides extra freshness
- › Elasticated wrist for a secure comfortable fit



**SUITABLE FOR**

**Typical Industries**

- Automotive
- Construction
- Logistics
- Utilities
- Waste Management

**Suitable Applications**

- Assembly
- Goods Handling
- Handling Components with Sharp Edges
- Light Fabrication
- Maintenance

**CERTIFICATION**

CAT II

EN 388:2016



4X43B

See overleaf for explanation

**PRODUCT INFORMATION**


<b>MATERIALS</b>	LINER:	13 gauge HPPE, nylon
	COATING:	Polyurethane (PU)
<b>COLOUR</b>	Amber/Black	
<b>LENGTH (mm)</b>	250 (size dependent)	
<b>CUFF STYLE</b>	Elasticated knit wrist	

**ORDERING DETAILS**

SIZE	CODE	PACKAGING	VEND COMPATIBLE OPTION	
			CODE	PACKAGING
6/XS	SKY750	10 pairs per bag	SKYV750	120 individually bagged pairs per case
7/S	SKY751		SKYV751	
8/M	SKY752	120 pairs per case	SKYV752	
9/L	SKY753		SKYV753	
10/XL	SKY754		SKYV754	

**RECOMMENDATIONS FOR USE**

- **USE:** General handling glove with cut protection. Not suitable for thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

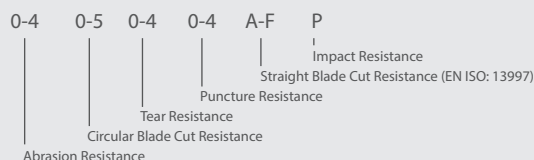**CERTIFICATION LEGENDS****MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS\***

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

**EUROPE**

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [sales@globus.co.uk](mailto:sales@globus.co.uk)  
**T:** +44 (0)161 877 4747  
**F:** +44 (0)161 877 4746

**MIDDLE EAST AND AFRICA**

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** [gcc@globusgroup.com](mailto:gcc@globusgroup.com)  
**T:** +971 4 882 9962  
**F:** +971 4 882 9963

