

477

Fully insulated glove with nitrile coating & foam nitrile grip


A durable double-dipped nitrile coated glove with an insulated liner. The foam nitrile provides excellent grip & the flat nitrile base provides oil resistance. Ideal for oil submersion tasks & the secure handling of wet & oily components in inclement weather.

Features

- ▲ Full double-engineered nitrile coatings protect against oils & ingress of liquids
- ▲ Fixed acrylic terry liner insulates & remains in place when removing the hand
- ▲ Highly flexible & resistant to abrasion & ripping
- ▲ Nitrile foam palm coating provides long lasting grip performance in wet & oily conditions
- ▲ Ergonomically designed to replicate the natural curvature of the hand, reducing fatigue
- ▲ Seamless for optimum comfort
- ▲ Seamless for optimum comfort



Certifications

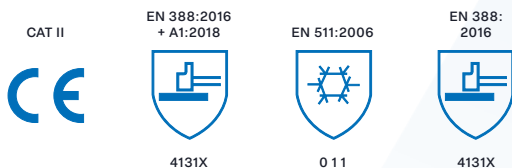

Suitable industries & applications

Industries

- ▲ Construction
- ▲ Oil and Gas
- ▲ Maritime
- ▲ Utilities
- ▲ Highways and Infrastructure

Applications

- ▲ Component and Product Assembly
- ▲ Masonry and Brickwork
- ▲ Cold Store and Handling
- ▲ General Maintenance
- ▲ Commercial Vehicles
- ▲ Public Works

Europe

sales@globus.com
+44 (0)161 877 4747
+44 (0)161 877 4746

Middle East & Africa

sales.gcc@globusgroup.com
+971 4 882 9962
+971 4 882 9963

Americas

Sales@GlobalGlove.com
763-450-0110

Fully insulated glove with nitrile coating & foam nitrile grip

Product information

Materials	Liner:	13 Gauge Polyester, Nylon, Acrylic
	Coating:	Foam Nitrile, Nitrile
Colour	Blue / Black	
Length	280mm	
Cuff Style	Elasticated Knit Wrist	

Ordering information

7/M	SHO4772	Items per Pack 5 x Pairs
8/L	SHO4773	
9/XL	SHO4774	Items per Case 60 x Pairs
10/XXL	SHO4775	

Additional information

Certification legend  or click here	Declaration of conformity  or click here	View product online  or click here
---	--	--

Europe

sales@globus.com
+44 (0)161 877 4747
+44 (0)161 877 4746

Middle East & Africa

sales.gcc@globusgroup.com
+971 4 882 9962
+971 4 882 9963

Americas

Sales@GlobalGlove.com
763-450-0110