

CC700


Chemical resistant glove with high cut protection and excellent grip properties

Offering high resistance to chemicals & protection against cut. For demanding tasks that require manual exertion & complete control over work materials in wet handling conditions

Features

- ▲ 18 gauge seamless liner, glass and steel free, reduces risks of irritations while being extremely comfortable
- ▲ Orange liner indicates when the polymer is ripped limiting the risks of contamination
- ▲ Nitrile protects the hand from oils, hydrocarbons, & grease penetration
- ▲ Rough grip finish provides a tactile feel, long-lasting grip & control in wet and oily conditions
- ▲ Suitable for contact heat resistance up to 100°C (approx. 15 seconds)
- ▲ Extended protection of the forearm
- ▲ Designed for easy movement & continuous wear

Certifications

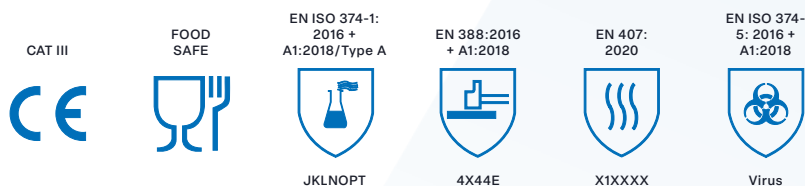

Suitable industries & applications

Industries

- ▲ Chemicals
- ▲ Oil and Gas
- ▲ Construction
- ▲ Manufacturing

Applications

- ▲ Bottling and Canning
- ▲ Handling Wet Oily or Greasy Materials
- ▲ Handling Sharp or Abrasive Materials
- ▲ Waste Collection and Sorting
- ▲ Chemical Handling and Containment

Europe

sales@globus.com
+44 (0)161 877 4747
+44 (0)161 877 4746

Middle East & Africa

sales.gcc@globusgroup.com
+971 4 882 9962
+971 4 882 9963

Americas

Sales@GlobalGlove.com
763-450-0110

Chemical resistant glove with high cut protection and excellent grip properties

Product information

Materials	Liner:	18 Gauge Engineered HPPE
	Coating:	Nitrile
Colour	Blue	
Length	360mm	
Cuff Style	Gauntlet	

Ordering information

7/S	SHOCC7001	Items per Pack 12 x Pairs
8/M	SHOCC7002	
9/L	SHOCC7003	
10/XL	SHOCC7004	Items per Case 72 x Pairs
11/XXL	SHOCC7005	

Additional information

Certification legend  or click here	Declaration of conformity  or click here	View product online  or click here
---	--	--

Europe

sales@globus.com
+44 (0)161 877 4747
+44 (0)161 877 4746

Middle East & Africa

sales.gcc@globusgroup.com
+971 4 882 9962
+971 4 882 9963

Americas

Sales@GlobalGlove.com
763-450-0110