
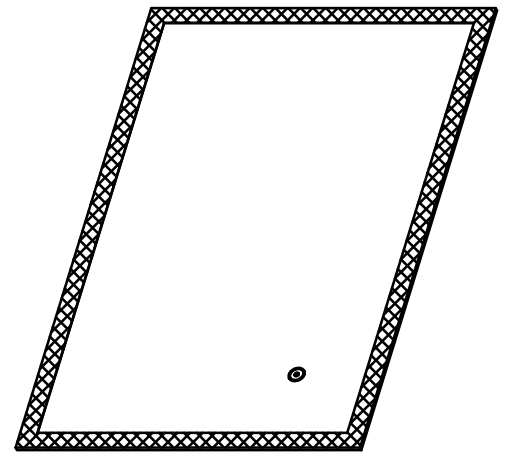
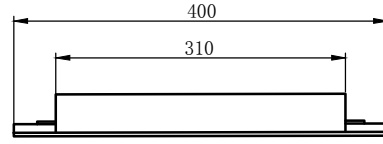
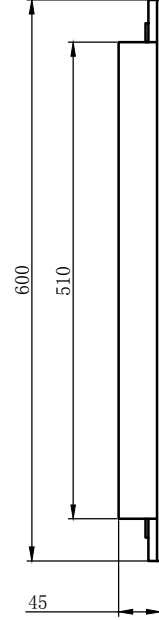


A		B				C		D	
▶ Critical Dimension	Perspective drawing	Tolerance grade not noted	Basic size	$0 < a \leq 6$	$6 < a \leq 30$	$30 < a \leq 120$	$120 < a$	Note the Angle tolerance	
▶ Most important dimensions		Tol Value		± 0.1	± 0.3	± 0.5	± 1	$\pm 1^\circ$	

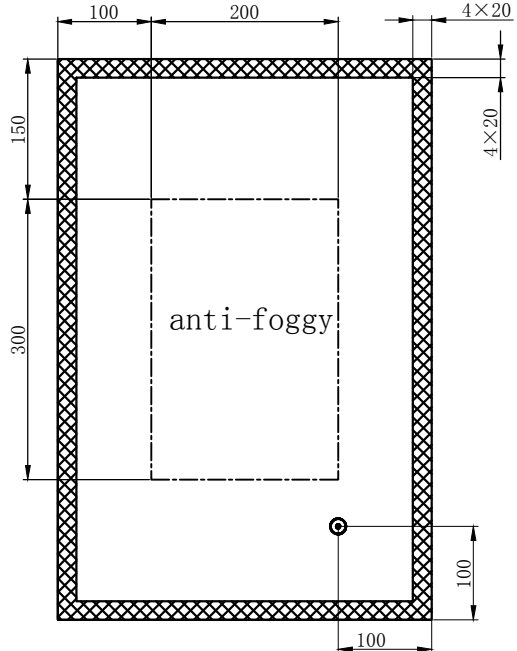

- Technical requirements:
- 1、 Size: 400*600*45 MM.
 - 2、 4mm copper-free silver mirror with 20mm sanding edge acrylic strip support , can be landscape or portrait.
 - 3、 Sensor touch control, anti-foggy.
 - 4、 LED 2835 lighting temperature of 6400k+/-300 white.
 - 5、 Watt: 25 W, Lumen specification: 1900 lumen.
 - 6、 Input: 220~240V, output: DC12V.

Version	Quantity	ECN number	Modifier	Date	Statement: This the graph is confidential, copyright owned by ORI, without the written permission of the company shall not use, copy or show other people
---------	----------	------------	----------	------	---

Theoretical weight[g]	Client Version	
Theoretical volume[cm ³]	Version NO.	
Theoretical area[cm ²]	Drawing Units	mm
Superficial area[cm ²]	Proportion	

Trade name			Material	
Drawing NO.	40.0031		Page 1/A total of 1 page	
Design		Auditor		Orient Resource Corporation Limited #8 of Xinling Road, Xiaolong village, Shiji Town, Panyu district, Guangzhou city, Guangdong Province, China.
Proofread		Ratify		
Date				

1
2
3
4

1
2
3
4

A B C D