



m a n u a l

Slider

Installation instructions

Slider


Adjustment range:(-20mm/0mm)×1850mm

Mounting preparation

The sliding door can be mounted to the left or the right. In these installation instructions the description is based on a sliding door to the left. After opening the packaging, read the instructions carefully. Check whether all parts are present and there are no signs of shipping damage. If you find any problems, please contact your retailer directly.


Necessary tools: electric drill, masonry drill (ϕ 6mm), drill (ϕ 3.2mm), crosstip screw driver, spirit level, tape measure, pencil and silicone sealant.

Tools required

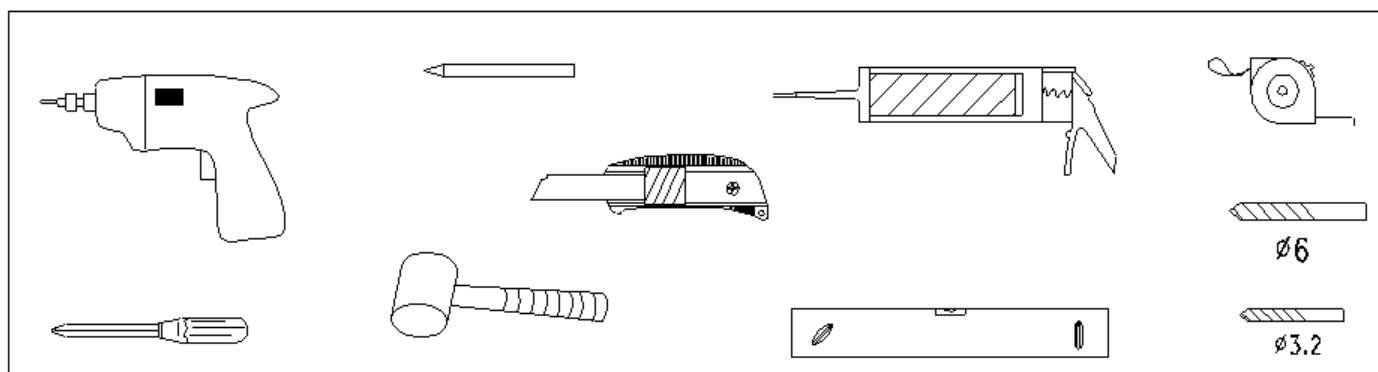

Contents of installation instruction

6SD9 30 ST4 16X	6SD10 8X	6SD11 10 ST4 8X	6SD12 12 ST4 2X	6SD13 1X
6SD14 1X	6SD15 1X	6SD16 14X	6SD17 2X	

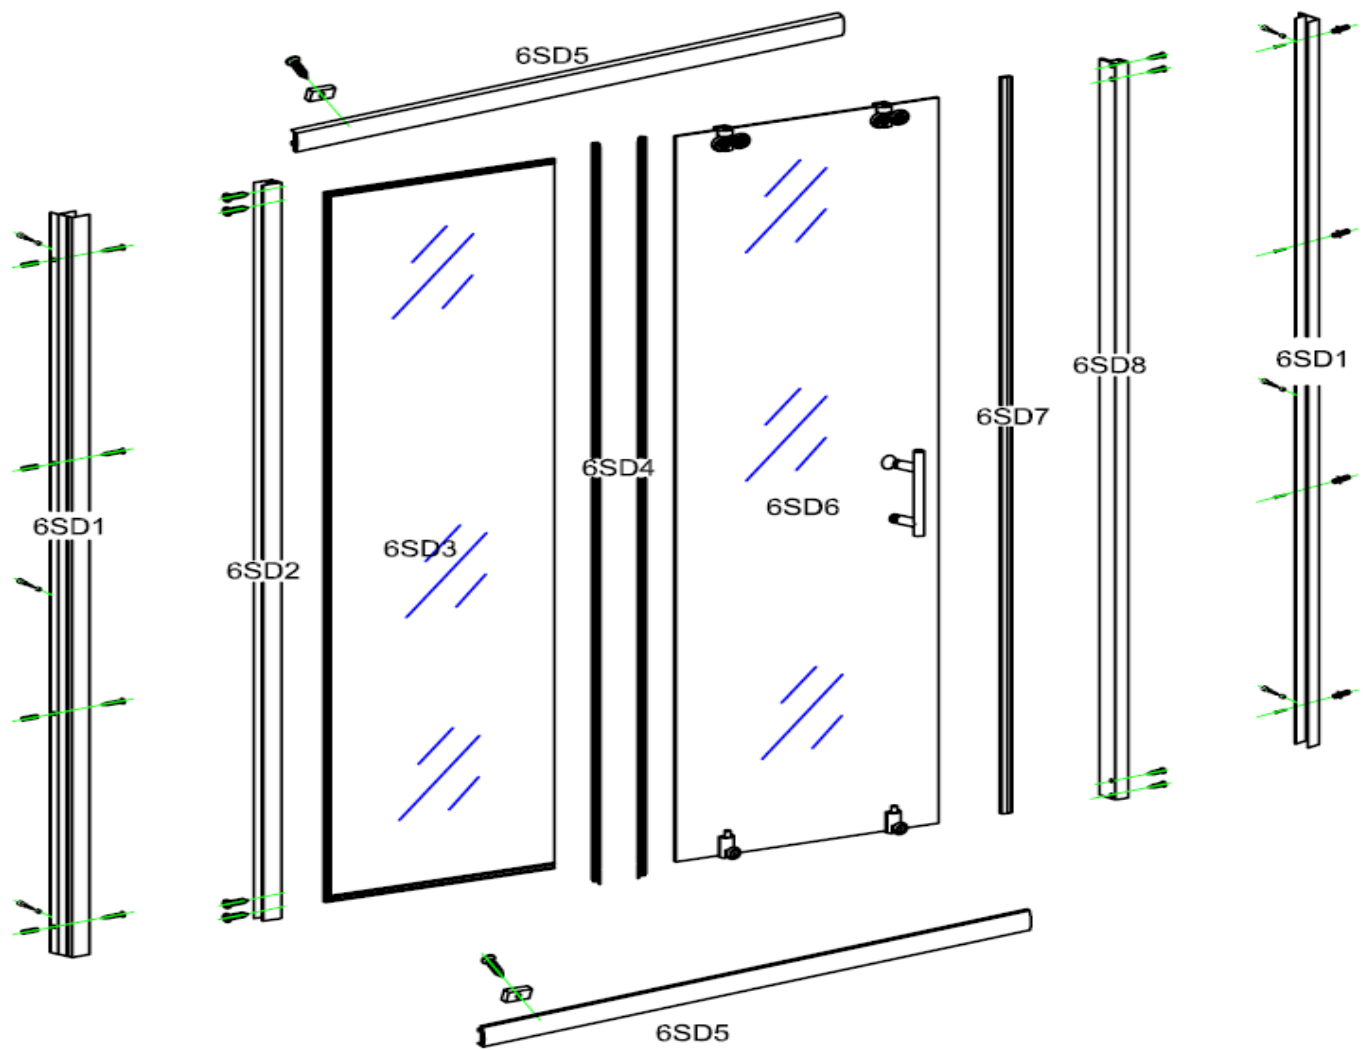

Mounting process

1. Using the spirit level to make sure the frame between the walls is horizontal, as showed in figure 1

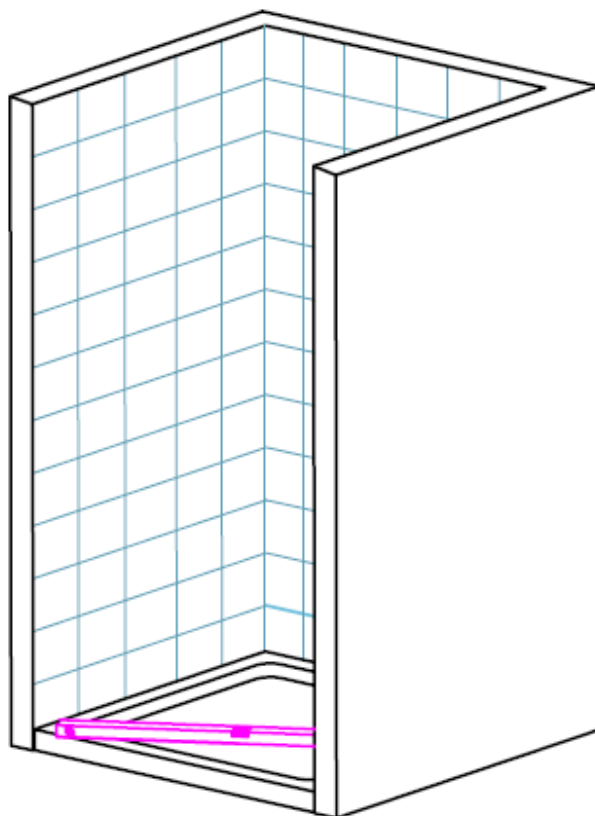


Figure 1

2. Lift the wall profile(6SD1) upto the wall. Check whether the frame is vertical by using a spirit level. Mark the holes to the walls with a pencil, as shown in figure 2.

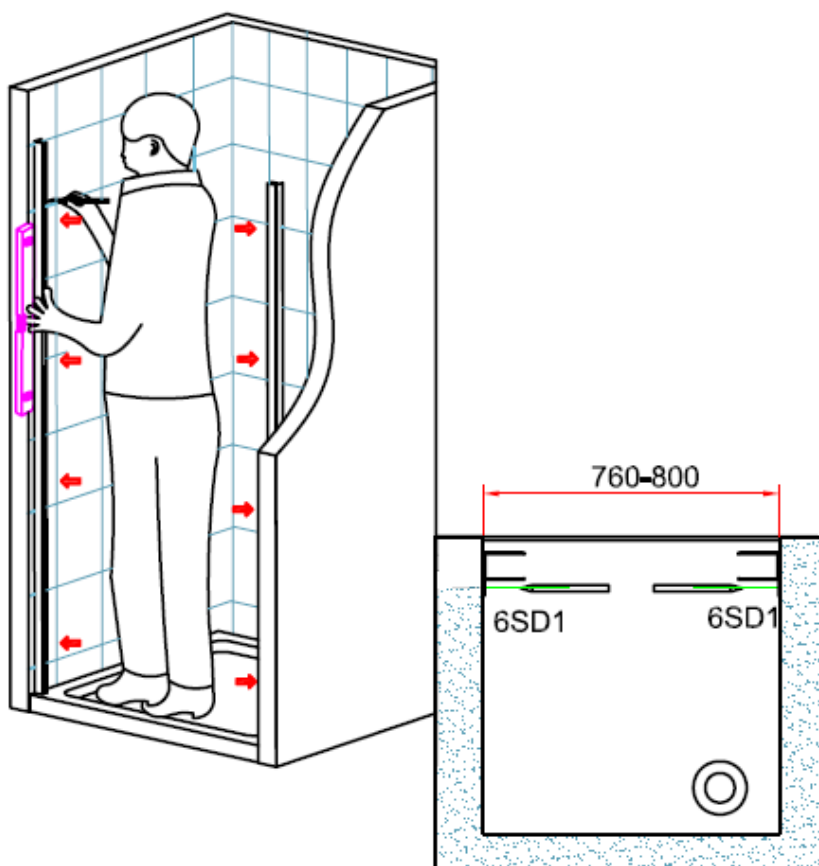


Figure 2

3. Drill the holes(\varnothing 6mm) into the wall according to the marks made and insert the wall plugs (6SD10) into the holes, as shown in figure 3

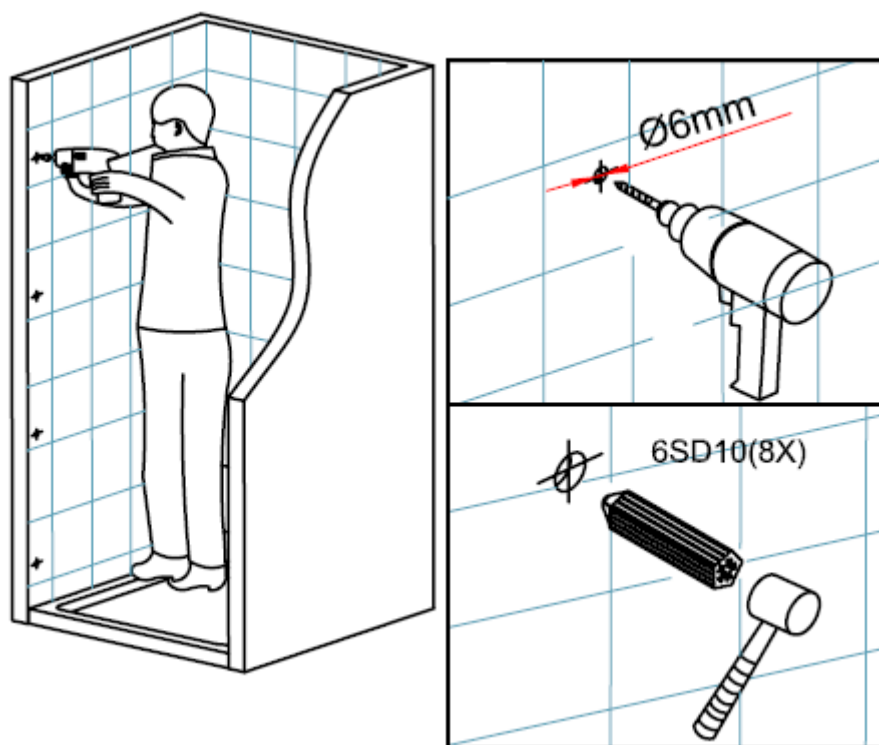


Figure 3

4. Connect the fixed profile(6SD2) to the rail profile(6SD5) vertically by using the screw(6SD9),as showed in figure 4.

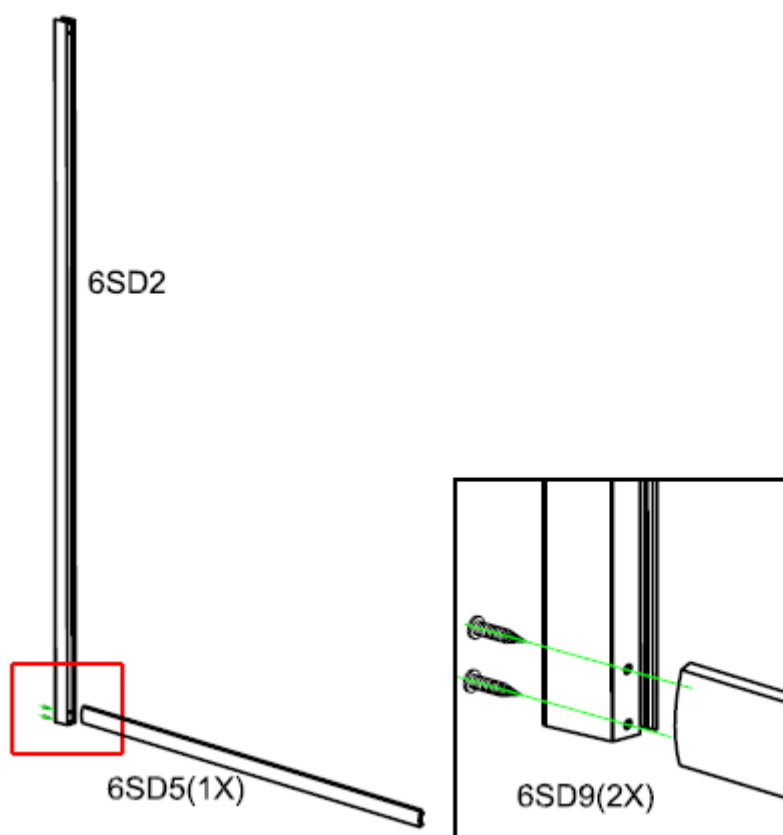


Figure 4

5. Click the U shape strip onto the fixed panel(6SD3) vertically.Put the fixed panel down to the rail profile(6SD5) and vertical to the fixed profile(6SD2),as showed in figure 5.

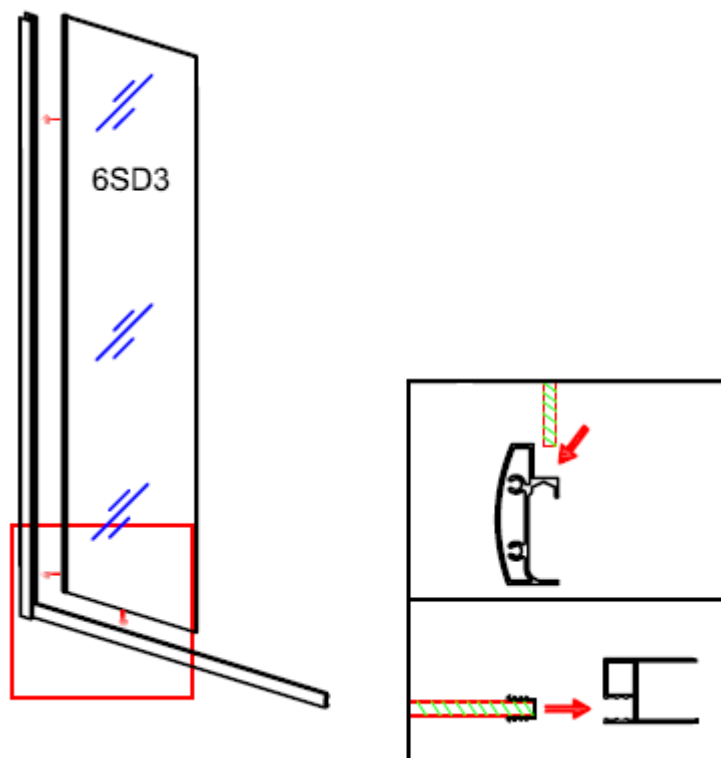


Figure 5

6. Click the strip(6SD4) onto the fixed panel,fasten the top rail profile(6SD5) with the fixed profile.Install the roller stopper(6SD17) with screw(6SD12),as showed in figure 6.

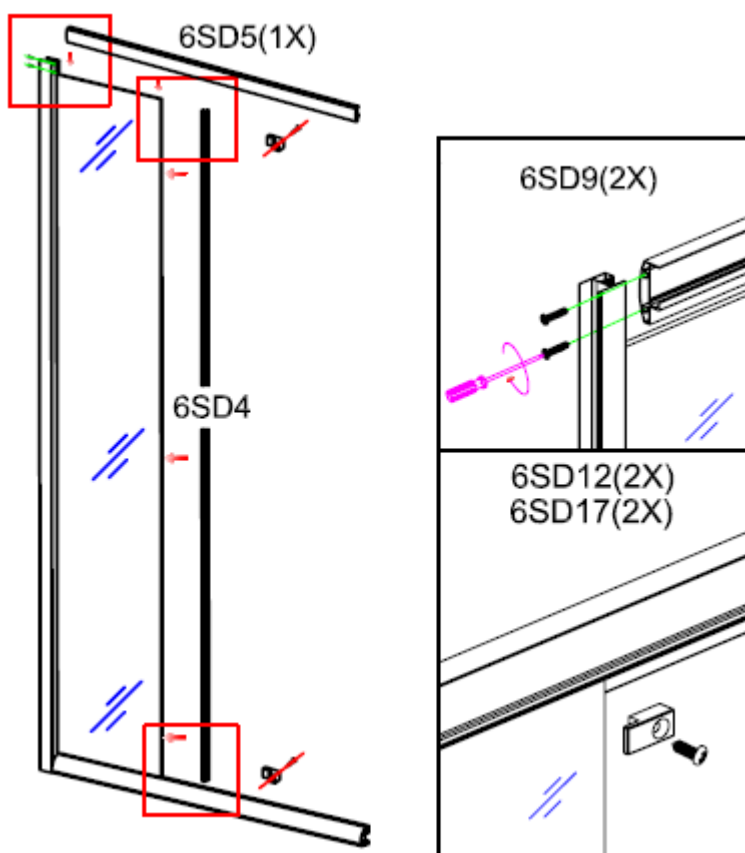


Figure 6

7. Click the strip(6SD4) and (6SD7) onto the moving panel.Hang the top double roller into the top rail and clip the bottom single roller into the bottom rail ,as showed in figure 7.

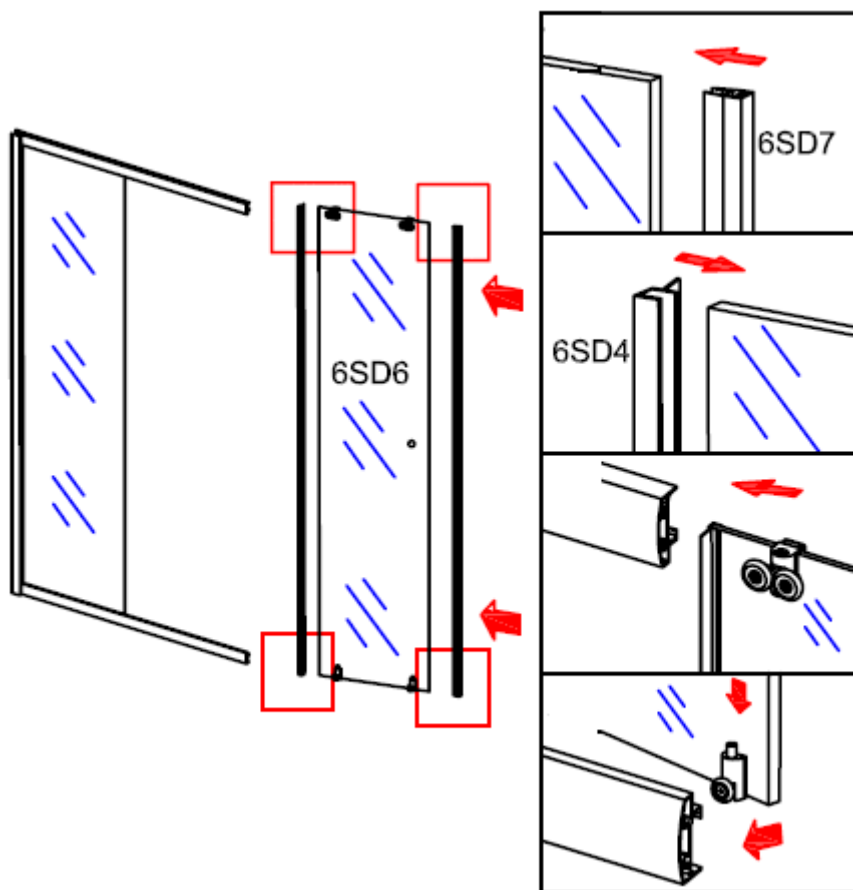


Figure 7

8. Fix the vertical profile(6SD8) with step(7).Install the handle onto the glass door,as showed in figure 8.

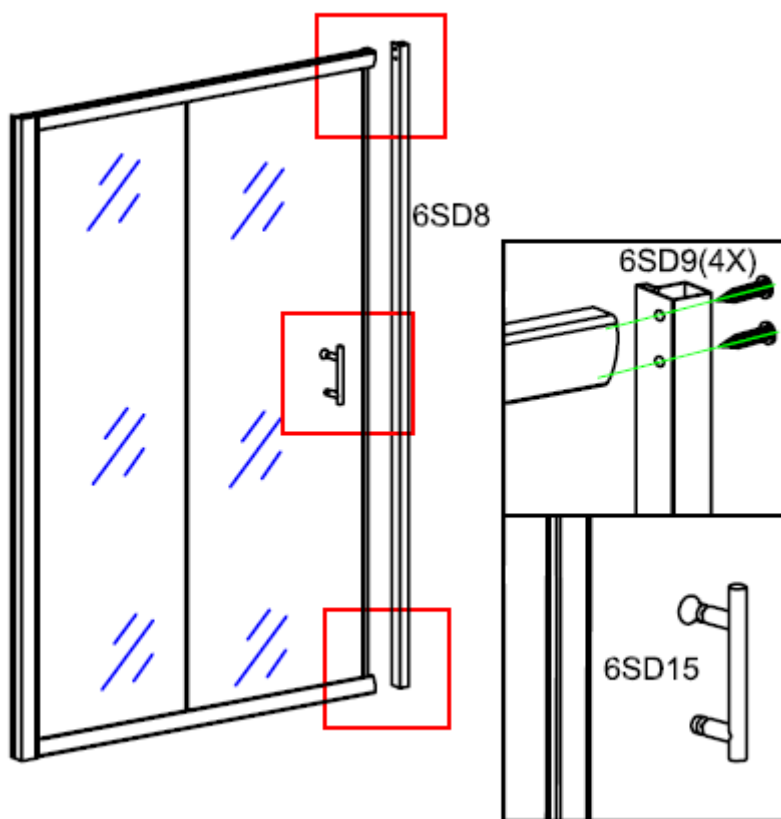


Figure 8

9. Connect the wall profile(6SD1) with the door set,as showed in figure 9.

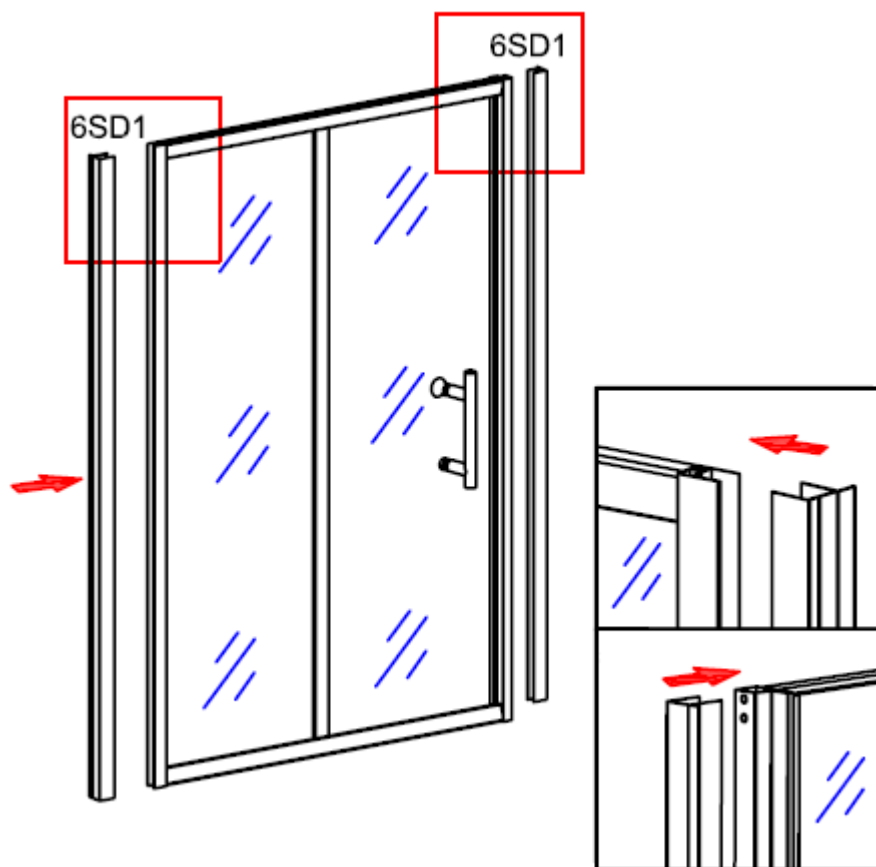


Figure 9

10. Moving the whole set to the wall frame,as showed in figure 10

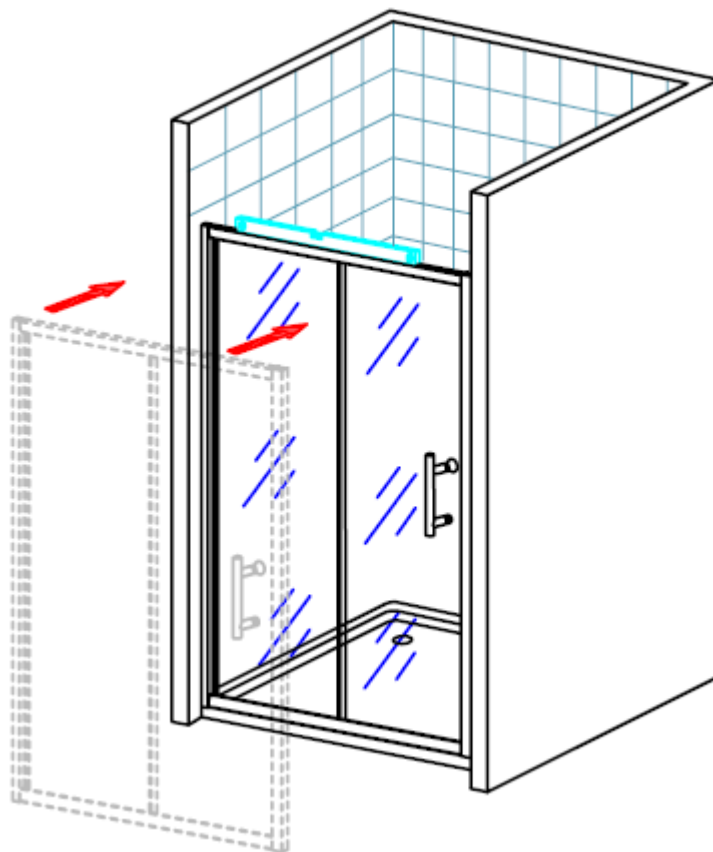


Figure 10

11. Adjust the wall profile and the fixed profile, then fasten the wall profile(6SD1) to the wall by using screw(6SD9) with caps, as showed in figure 11.

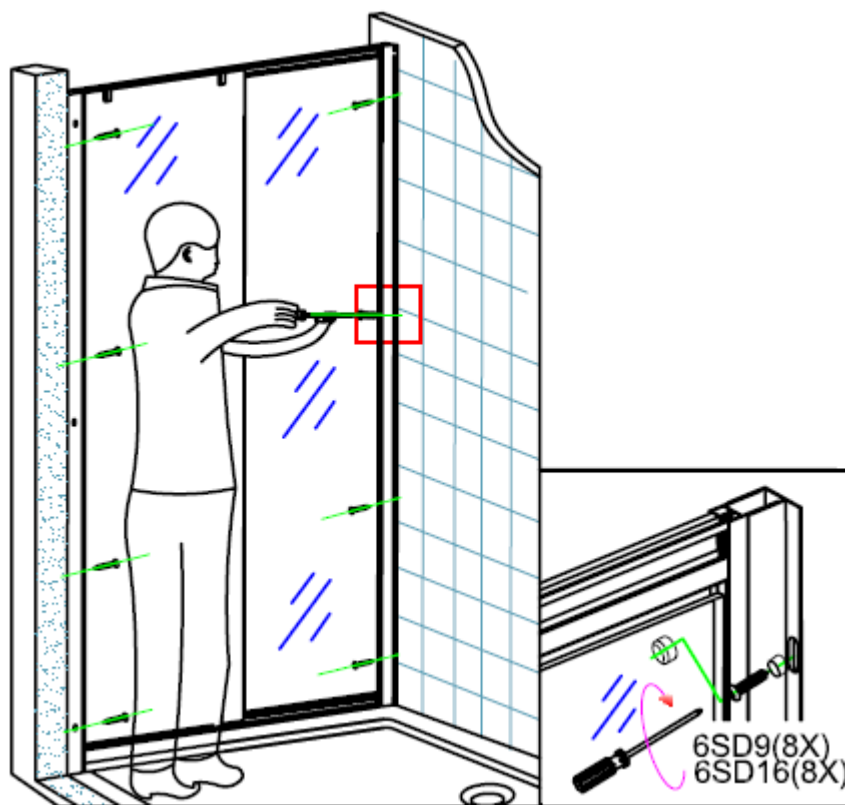


Figure 11

12. Fasten the fixed profile and wall profile by using screw(6SD11), as showed in figure 12

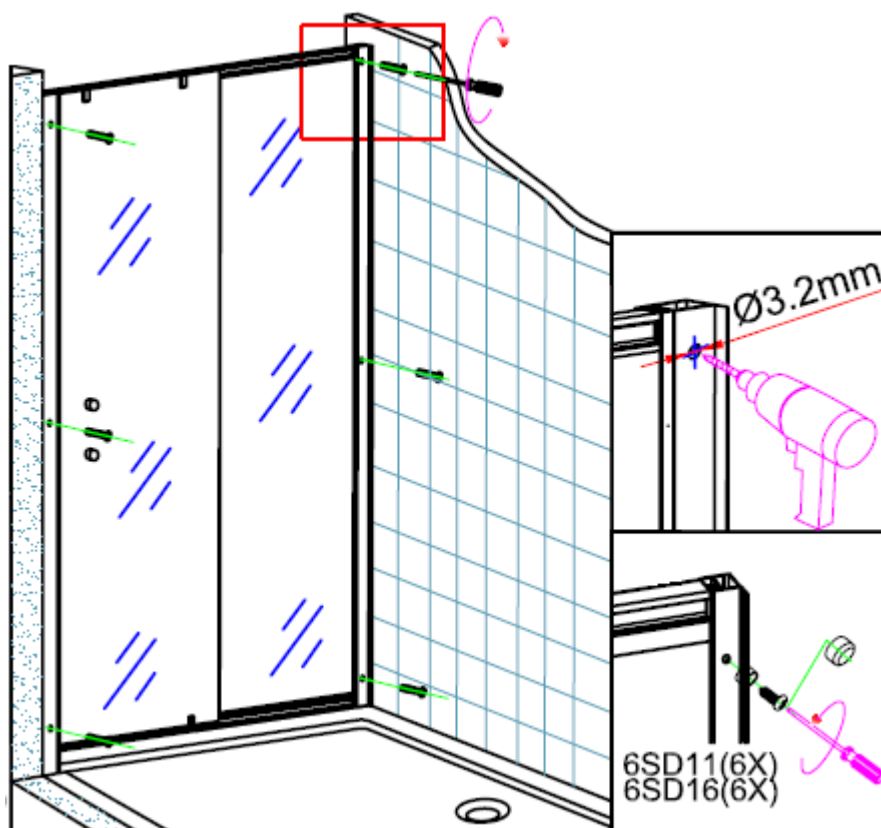


Figure 12

13. Install the top and bottom rubber stoppers(6SD13) and (6SD14) with screw(6SD9),
As showed in figure 13.

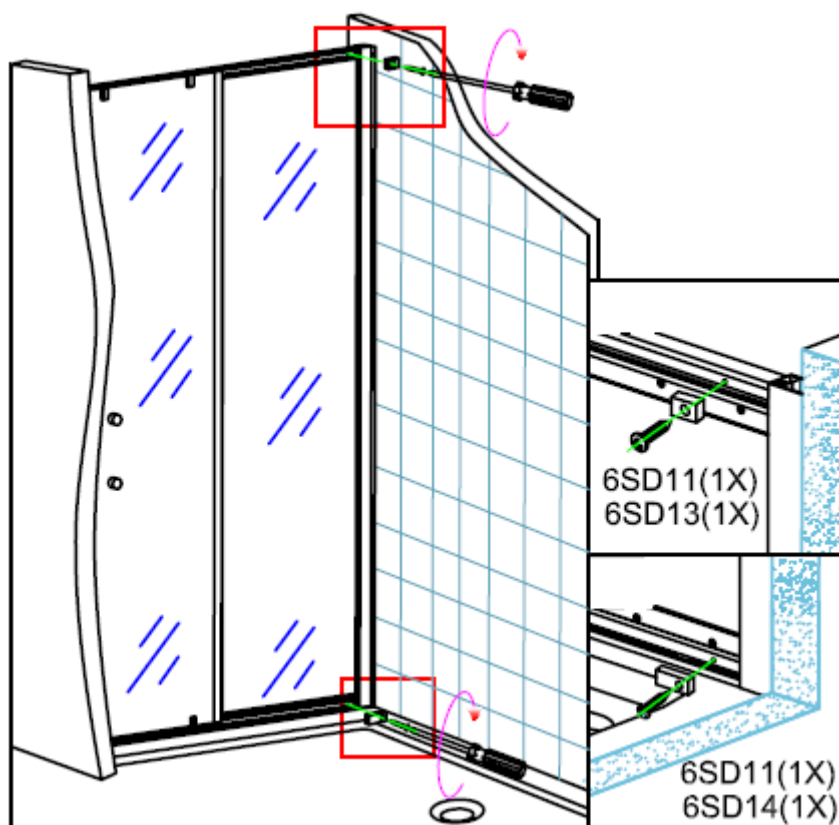


Figure 13

14. Finally,at all points connected to the wall,shower tray,floor and profiles,use silicone sealant only on the outside of the shower enclosure,as showed in figure 14

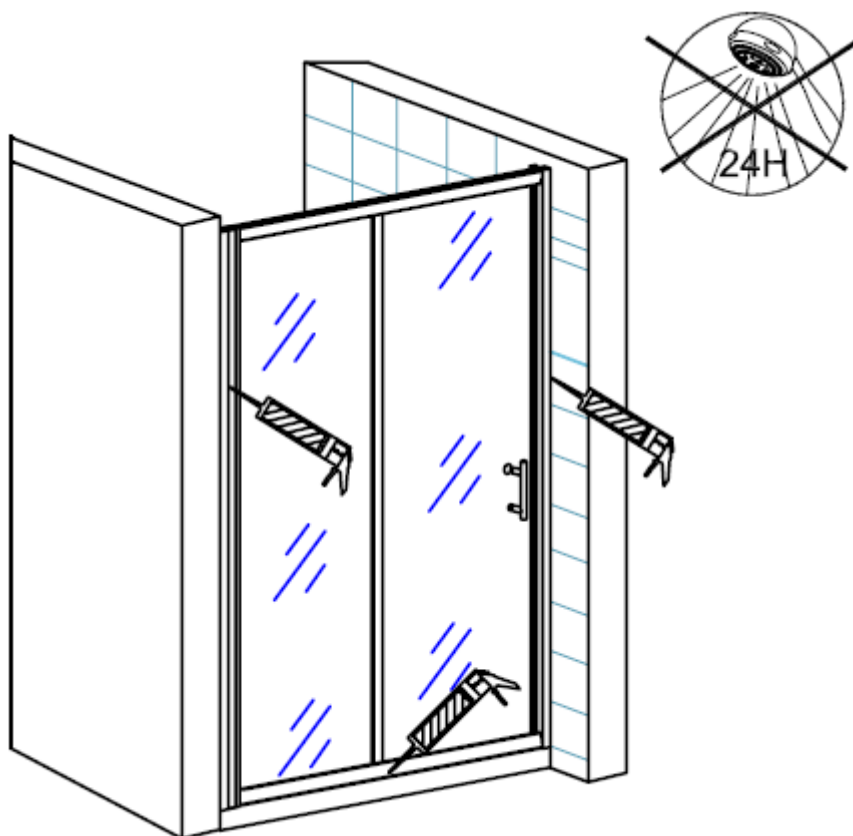


Figure 14

Installation instructions

Slider with side panel


Adjustment range:(-20mm/0mm)×(-4mm/0mm)×1850mm

Mounting preparation










The sliding door can be mounted to the left or the right. In these installation instructions the description is based on a sliding door to the left. After opening the packaging, read the instructions carefully. Check whether all parts are present and there are no signs of shipping damage. If you find any problems, please contact your retailer directly.


Necessary tools: electric drill, masonry drill (ϕ 6mm), drill (ϕ 3.2mm), crosstip screw driver, spirit level, tape measure, pencil and silicone sealant.

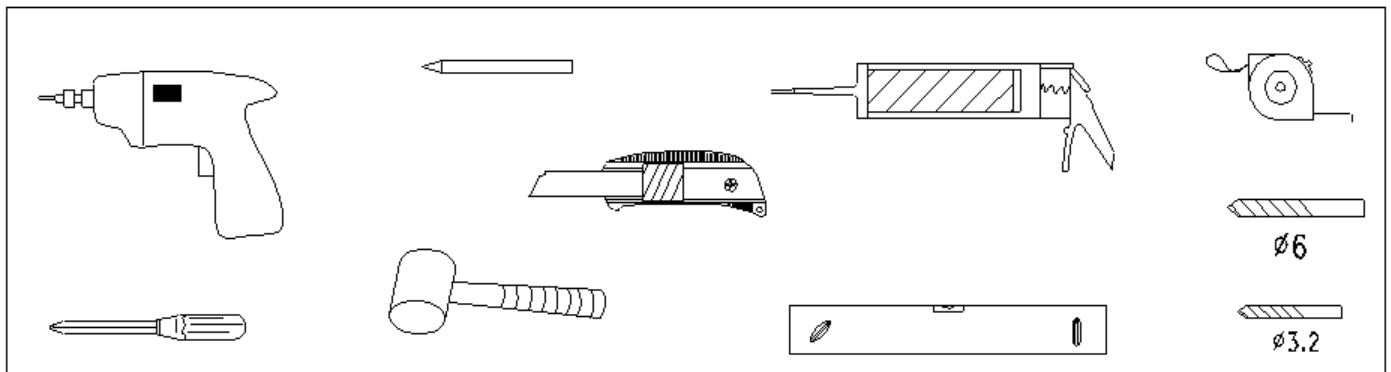Tools required



Contents of installation instruction

6SD9  16X	6SD10  8X	6SD11  15X	6SD12  2X	6SD13  1X
6SD14  1X	6SD15  1X	6SD16  17X	6SD17  2X	

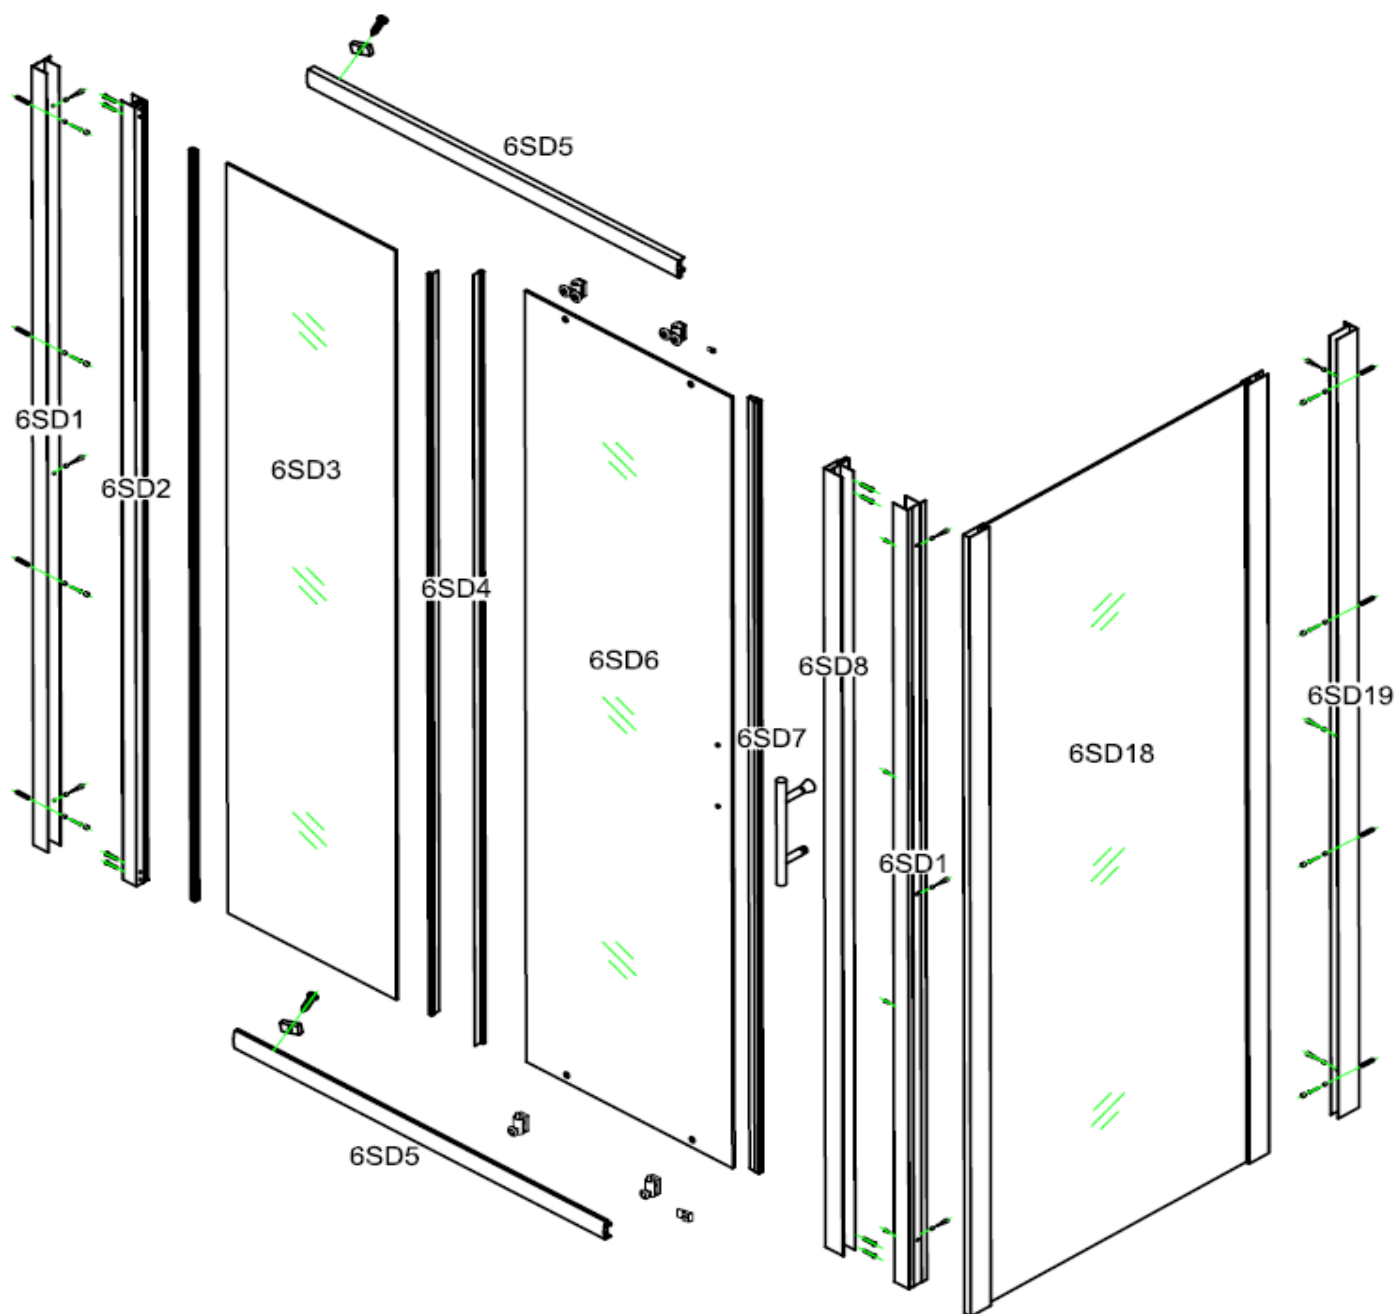

Mounting process

1. Using the spirit level to make sure the frame between the walls is horizontal. lift the wall profile(6SD1) upto the wall. Check whether the frame is vertical by using a spirit level. Mark the holes to the walls with a pencil. Drill the holes(\varnothing 6mm) into the wall according to the marks made and insert the wall plugs (6SD10) into the holes, as shown in figure 1

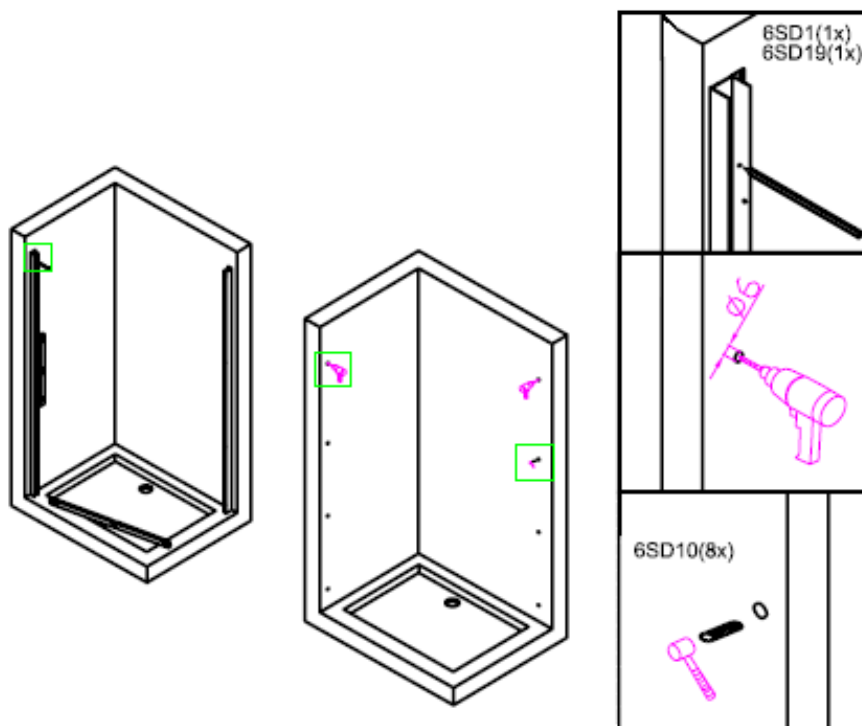


Figure 1

2. Fix the wall profile(6SD1) to the wall by using screw(6SD9) with caps, as showed in figure 2.

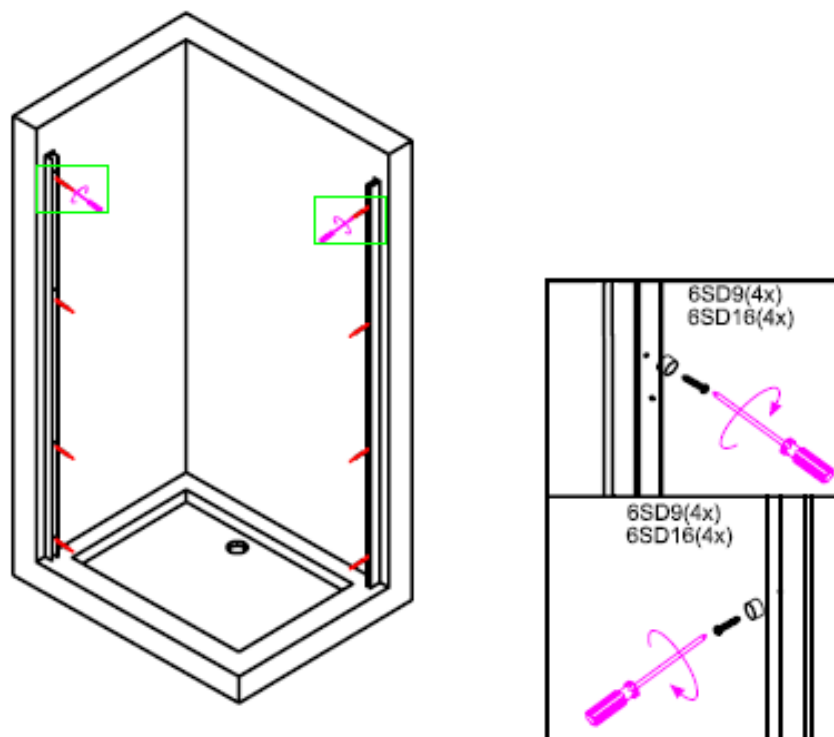


Figure 2

3. Click the U shape strip onto the fixed panel(6SD3) vertically,as showed in figure 3.

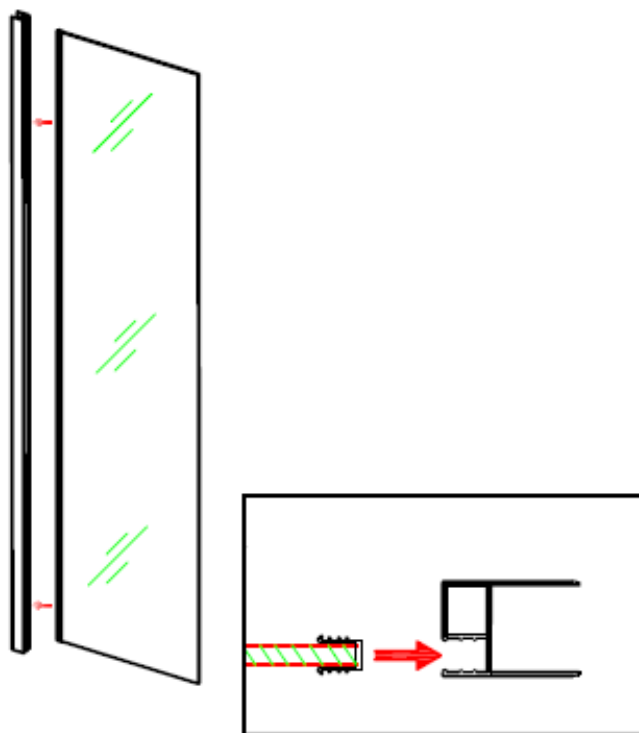


Figure 3

4. Put the fixed panel between the rail profiles(6SD5),fasten the rail profile with the fixed profile(6SD2) by using screw(6SD9).Install the stopper up and down rail,as showed in figure 4.

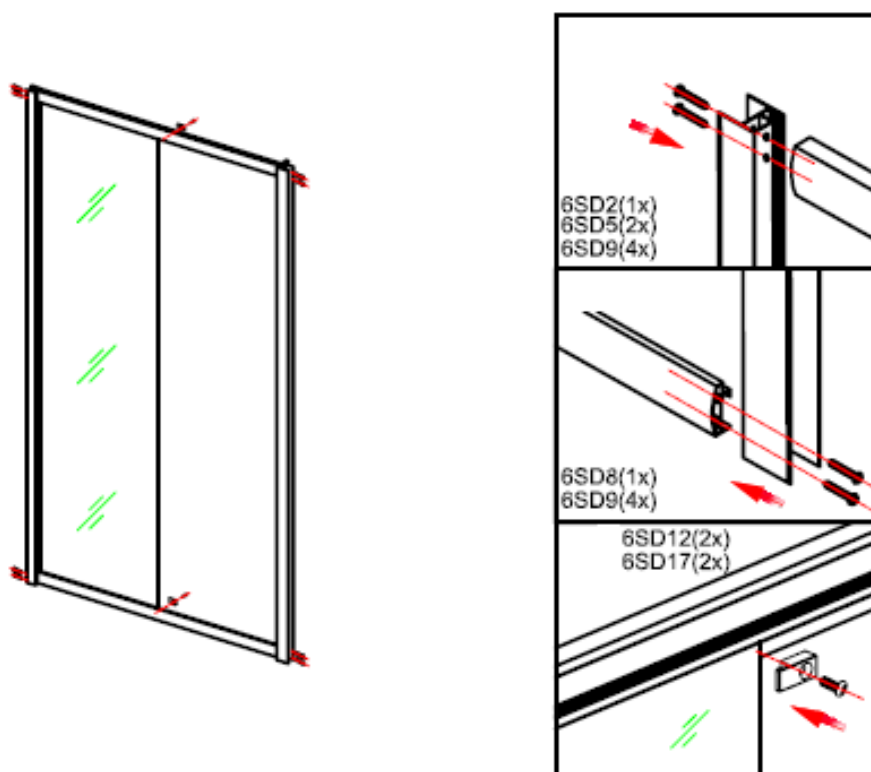


Figure 4

5. Screw the left wall profile to the side panel(6SD18) ,as showed in figure 5.

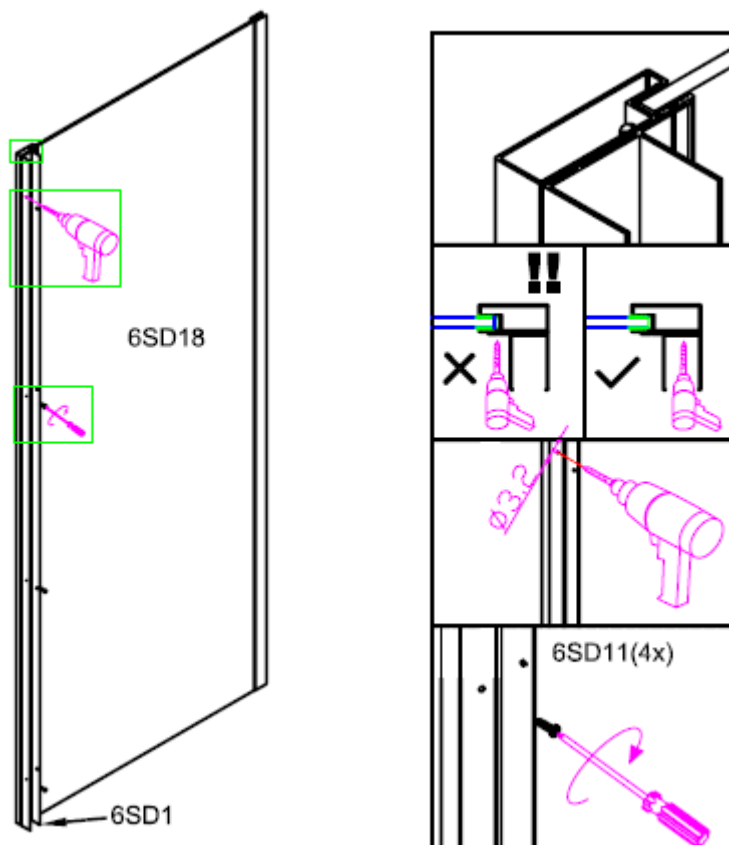


Figure 5

6. Move the whole set front panel to the wall profile(6SD1),as showed in figure 6.

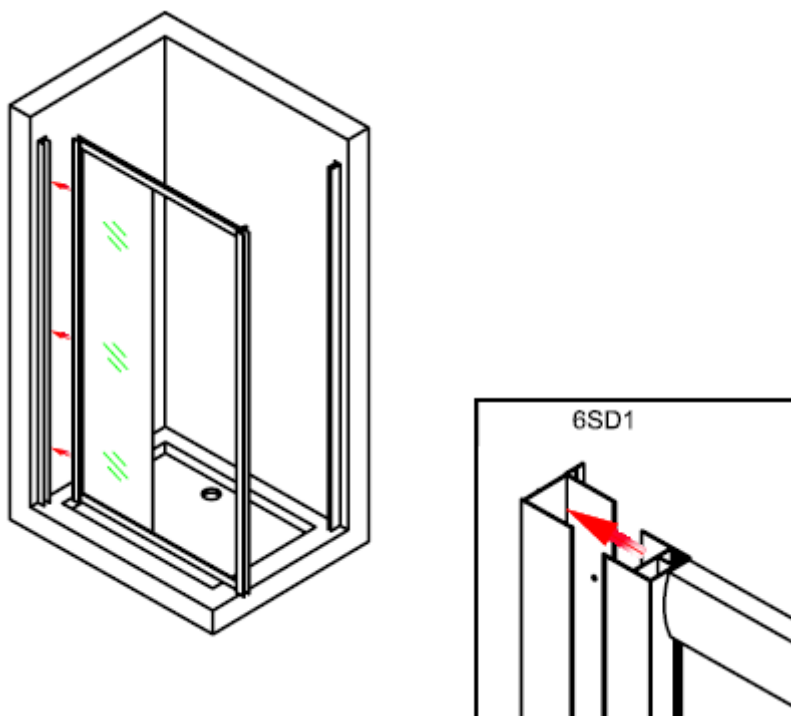


Figure 6

7. Adjust the wall profile with the fixed profile,as showed in figure 7.

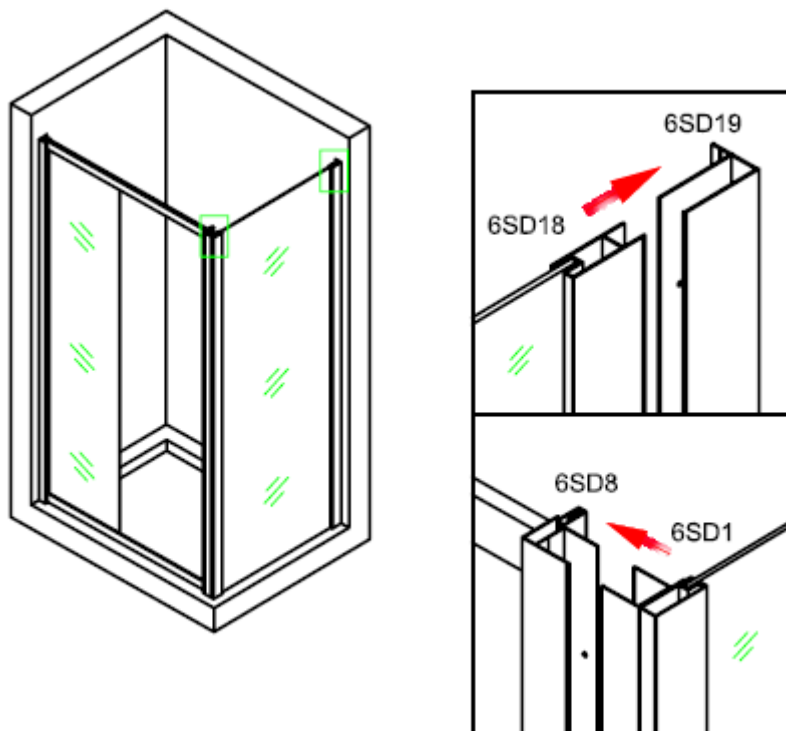


Figure 7

8. Fasten the wall profile with the fixed profile with screw(6SD11).Hang the top roller into the top rail profile and clip the bottom single roller into the bottom rail profile,as showed in figure 8.

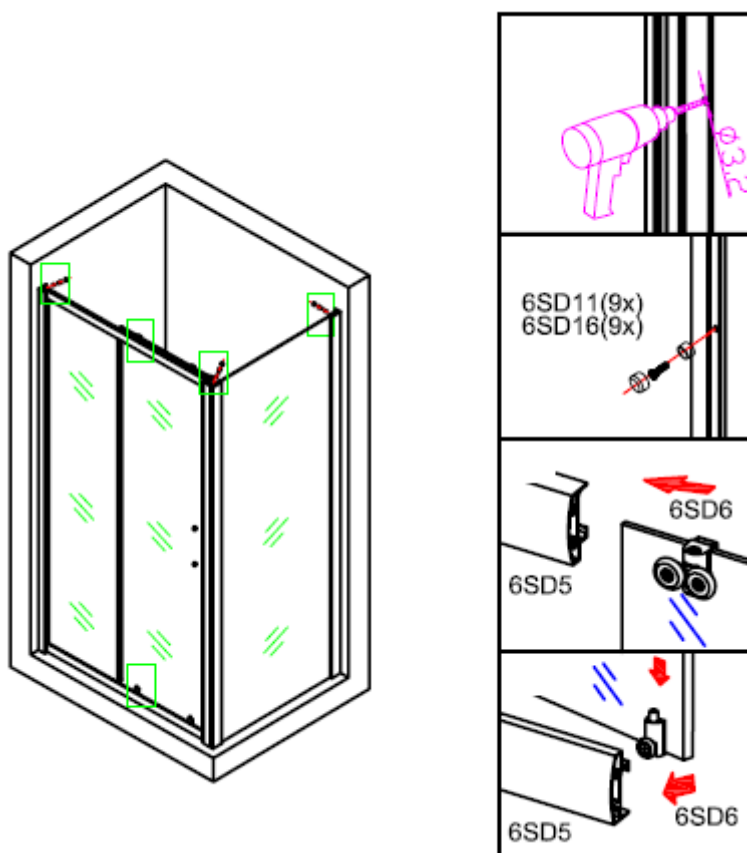


Figure 8

9. Click the strips(6SD4) to the glass panel and install the handle ,as showed in figure 9.

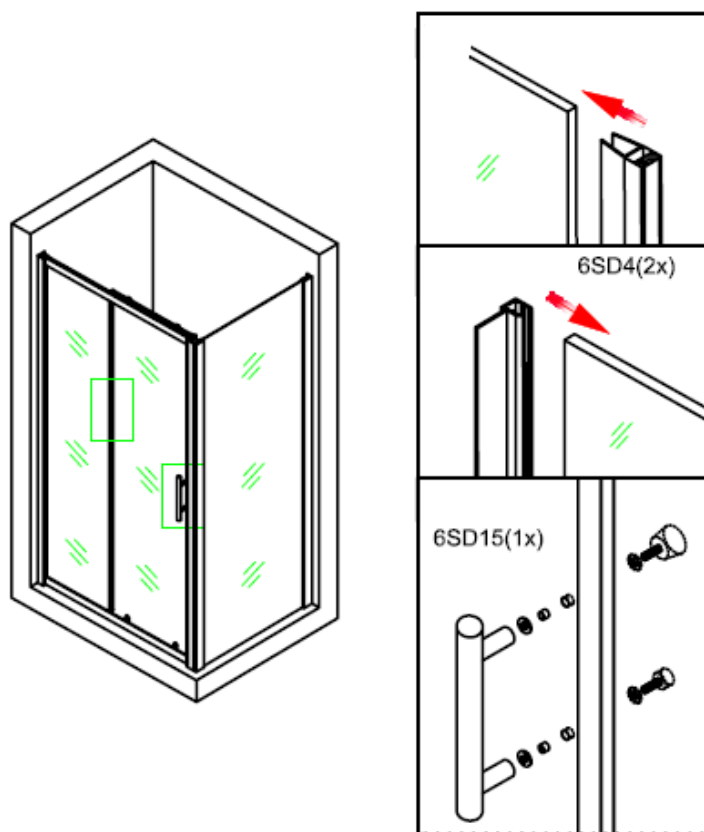


Figure 9

10. Install the top and bottom rubber stoppers,.Finally,at all points connected to the wall,shower tray,floor and profiles,use silicone sealant only on the outside of the shower enclosure,as showed in figure 10

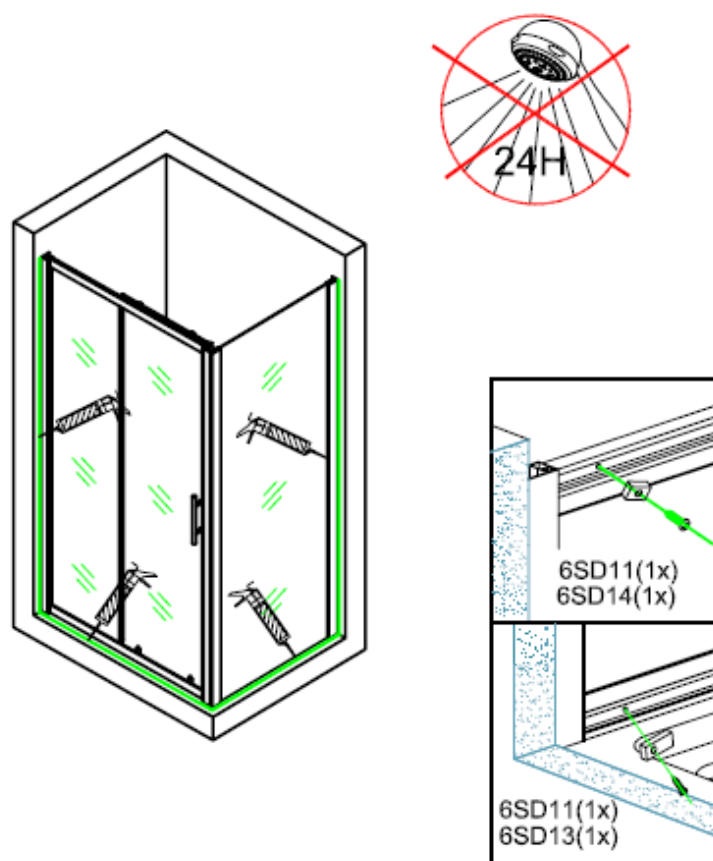


Figure 10

Cleaning & Maintenance

Don't clean the shower enclosure with irritant detergent such as alcohol,bleach or other chemical cleaners.

Only clean with warm soapy water.

After the installation is completed,should you find that there is notable noise when the glass door moves,you may add a small quantity of lubricant onto the roller wheel,slipping hook and the track.

The logo for Eastbrook, featuring the word "Eastbrook" in white, bold, sans-serif font, centered within a blue, wavy, horizontal shape that resembles a stylized wave or a banner.

Eastbrook

Eastbrook Road, Gloucester GL4 3DB
Technical Helpline: 01452 317890
email: technical@eastbrookco.com