



## Additional Instructions for Concealed Cistern & Frame

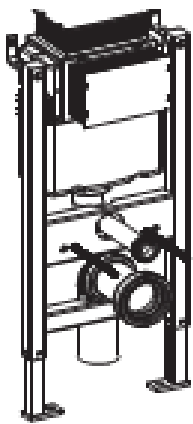

Soil pipe not supplied

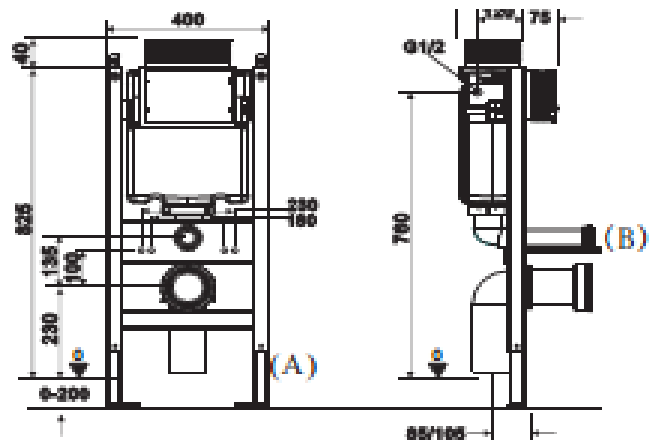

If your concealed cistern is not fitted to its frame or the 90° outlet pipe at the base of the cistern requires replacement, please use the parts enclosed and follow these instructions.



Front & back bracket




90° Outlet Pipe

If outlet pipe needs replacing please remove cistern from frame by undoing connecting bolts. Remove hanging brackets if any signs of damage. Replace hanging brackets by pushing into slots on top sides of cistern as shown below.



When replaced cistern should appear as below.

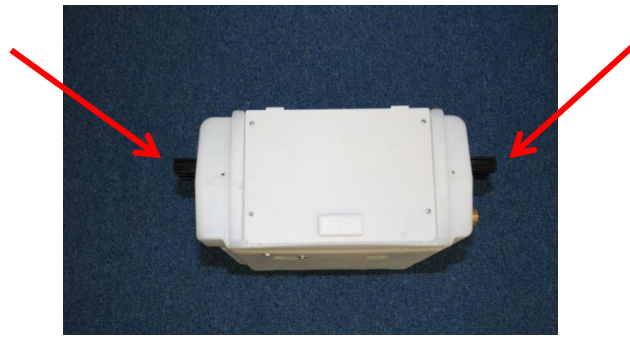

Replace 90° outlet pipe.



Place cistern back onto frame ensuring locating tab on 90° degree outlet pipe is in slot provided.



Re-fix connecting bolts and tighten.

