

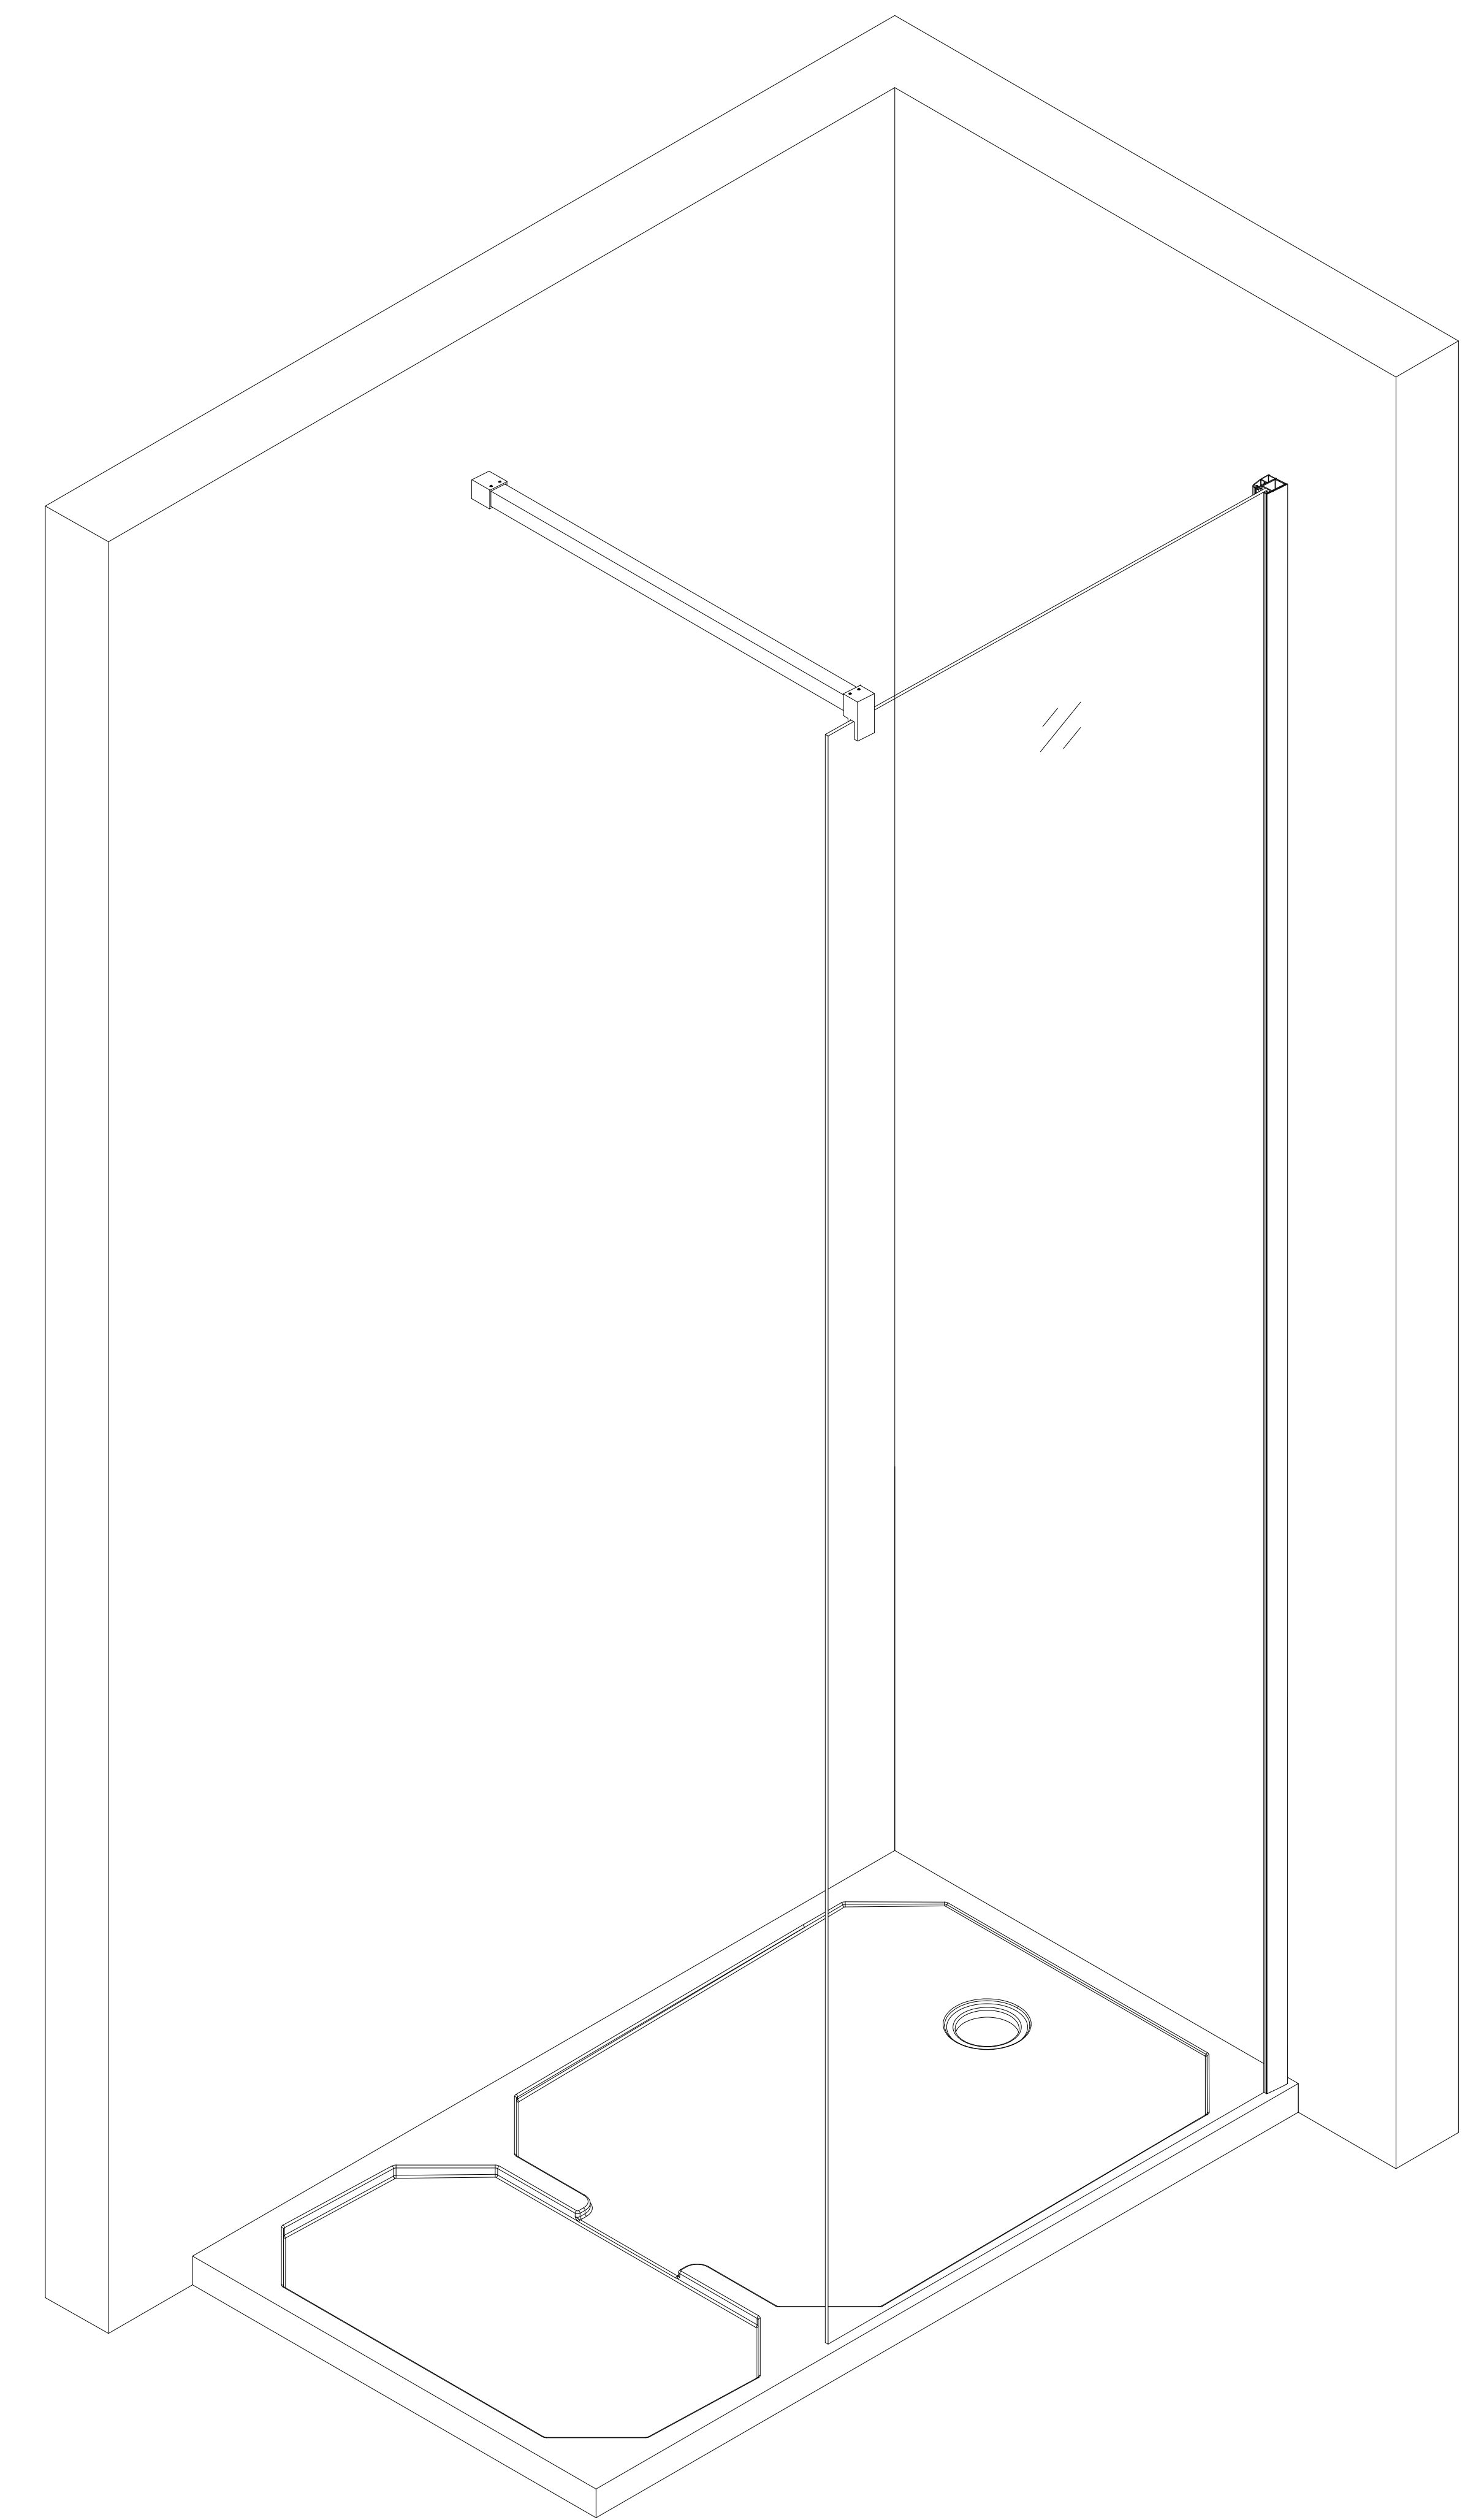
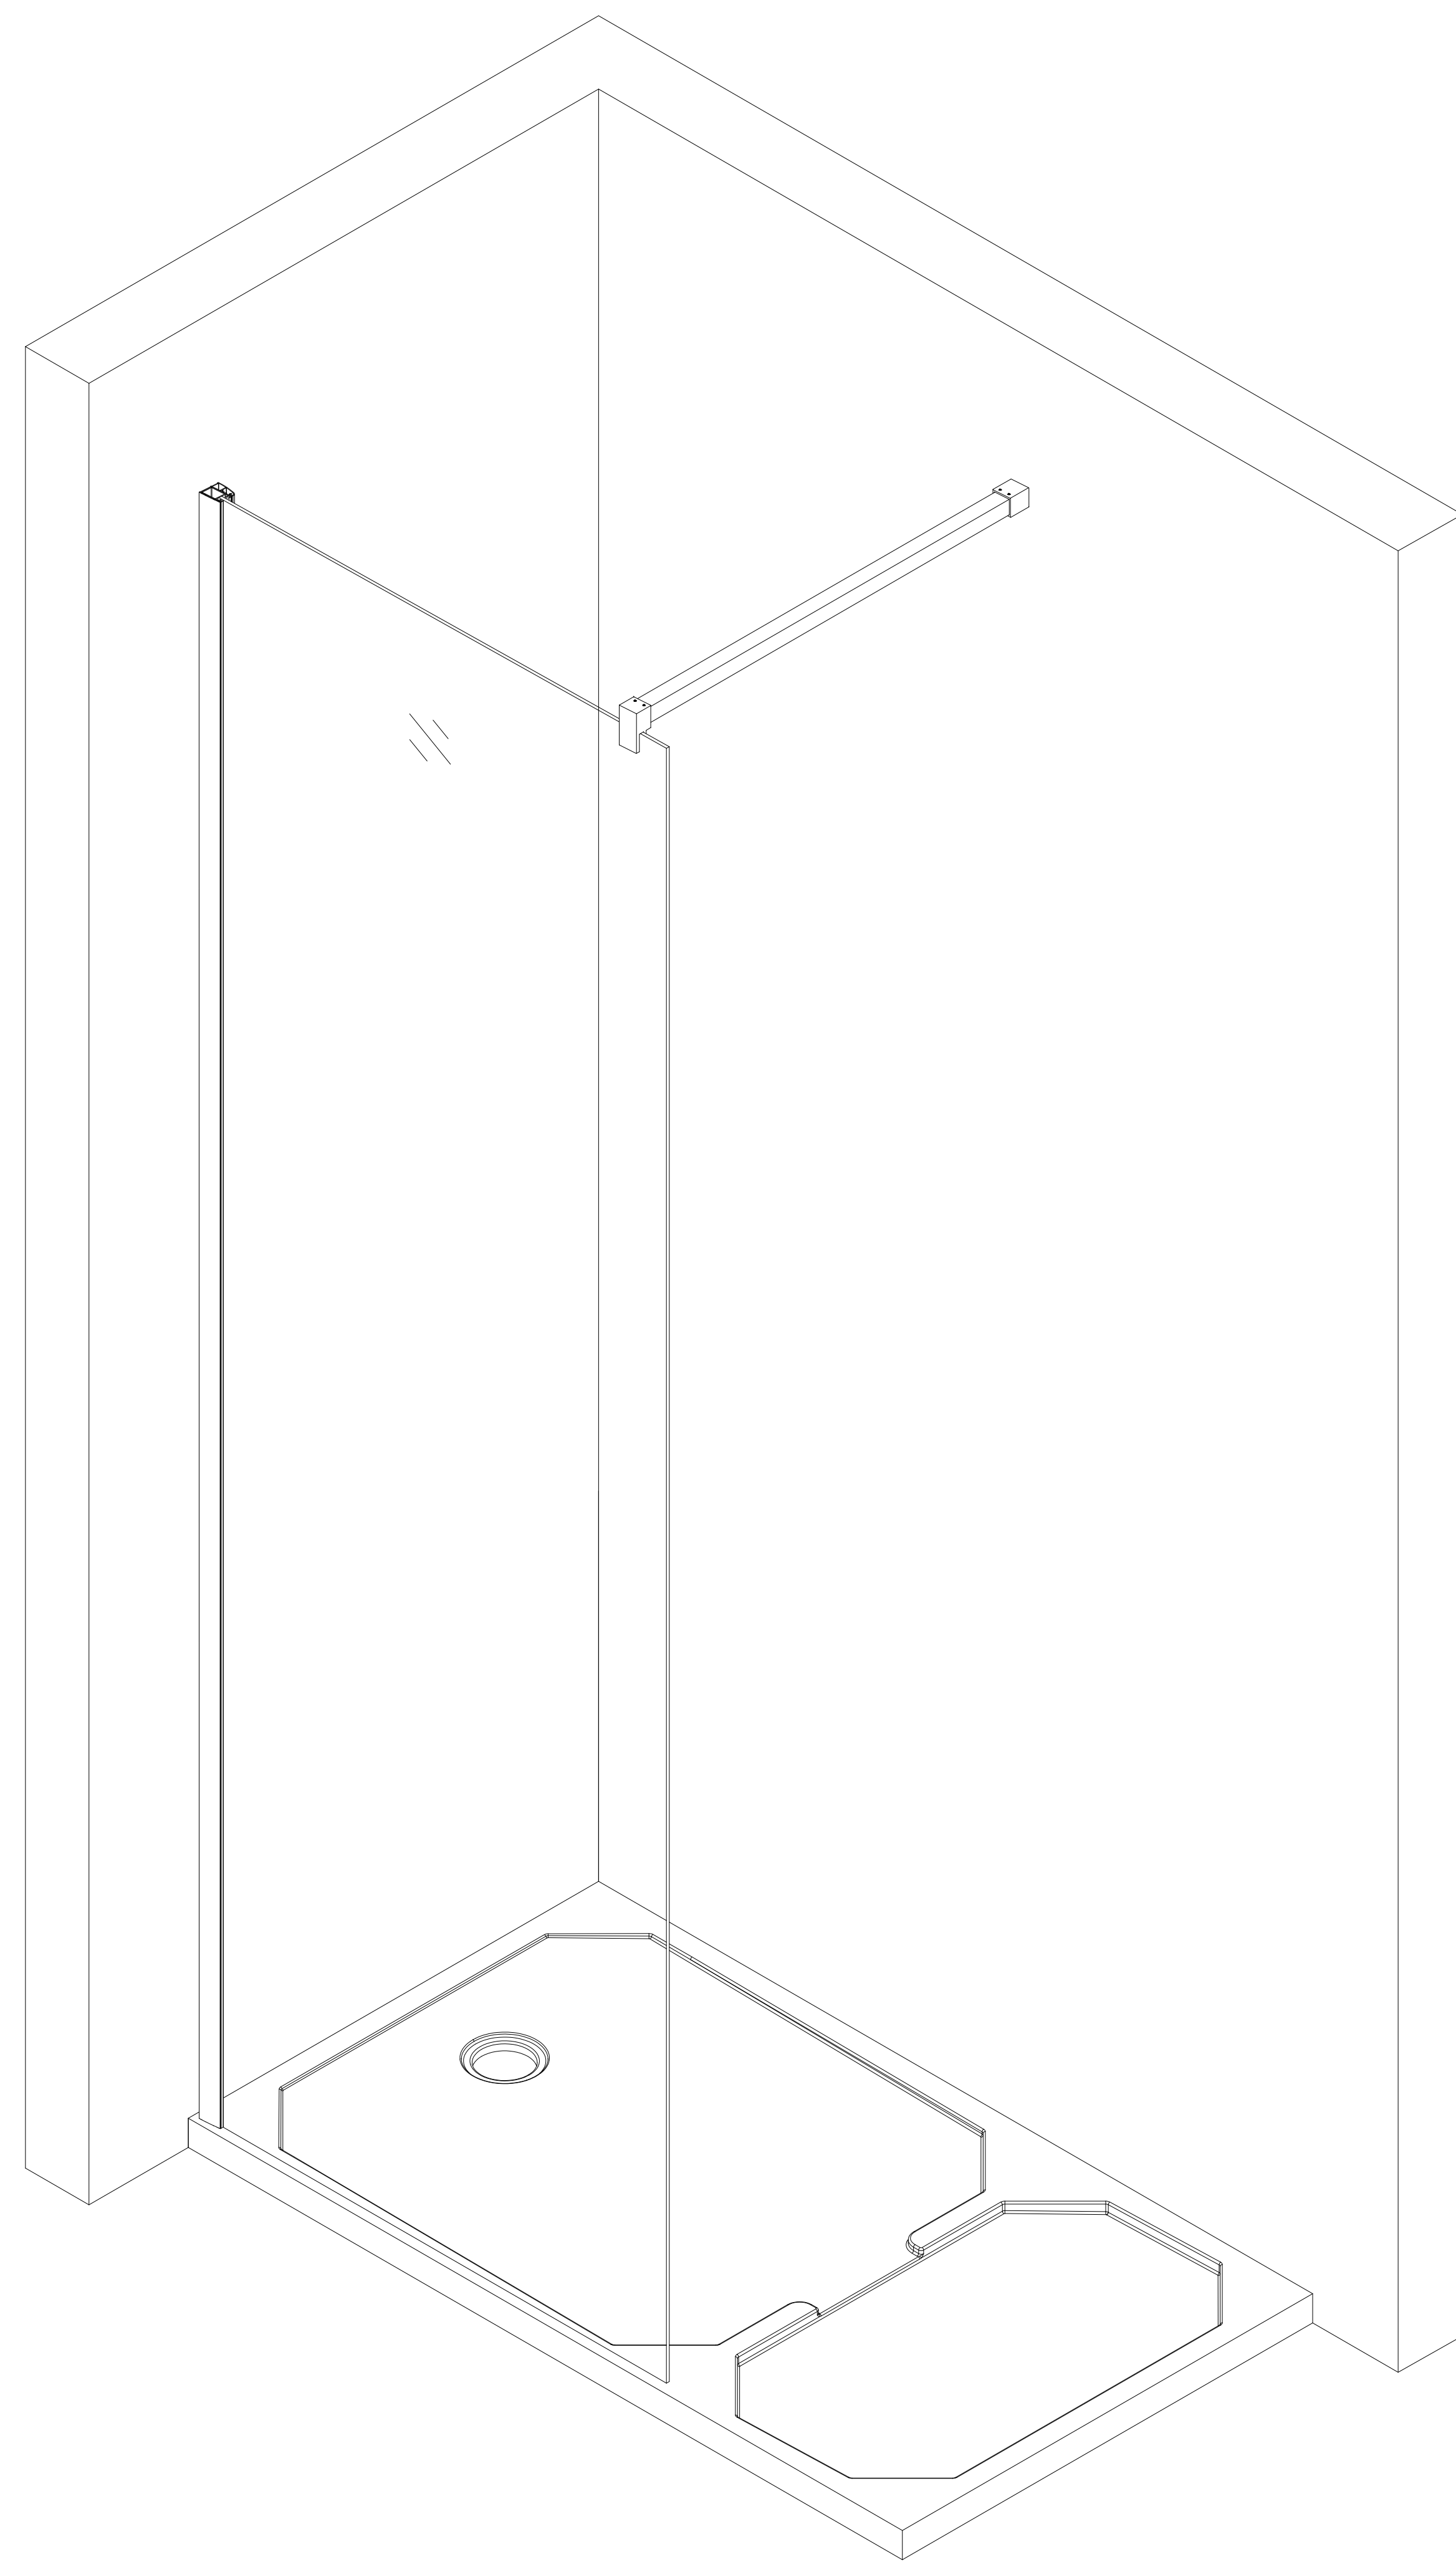
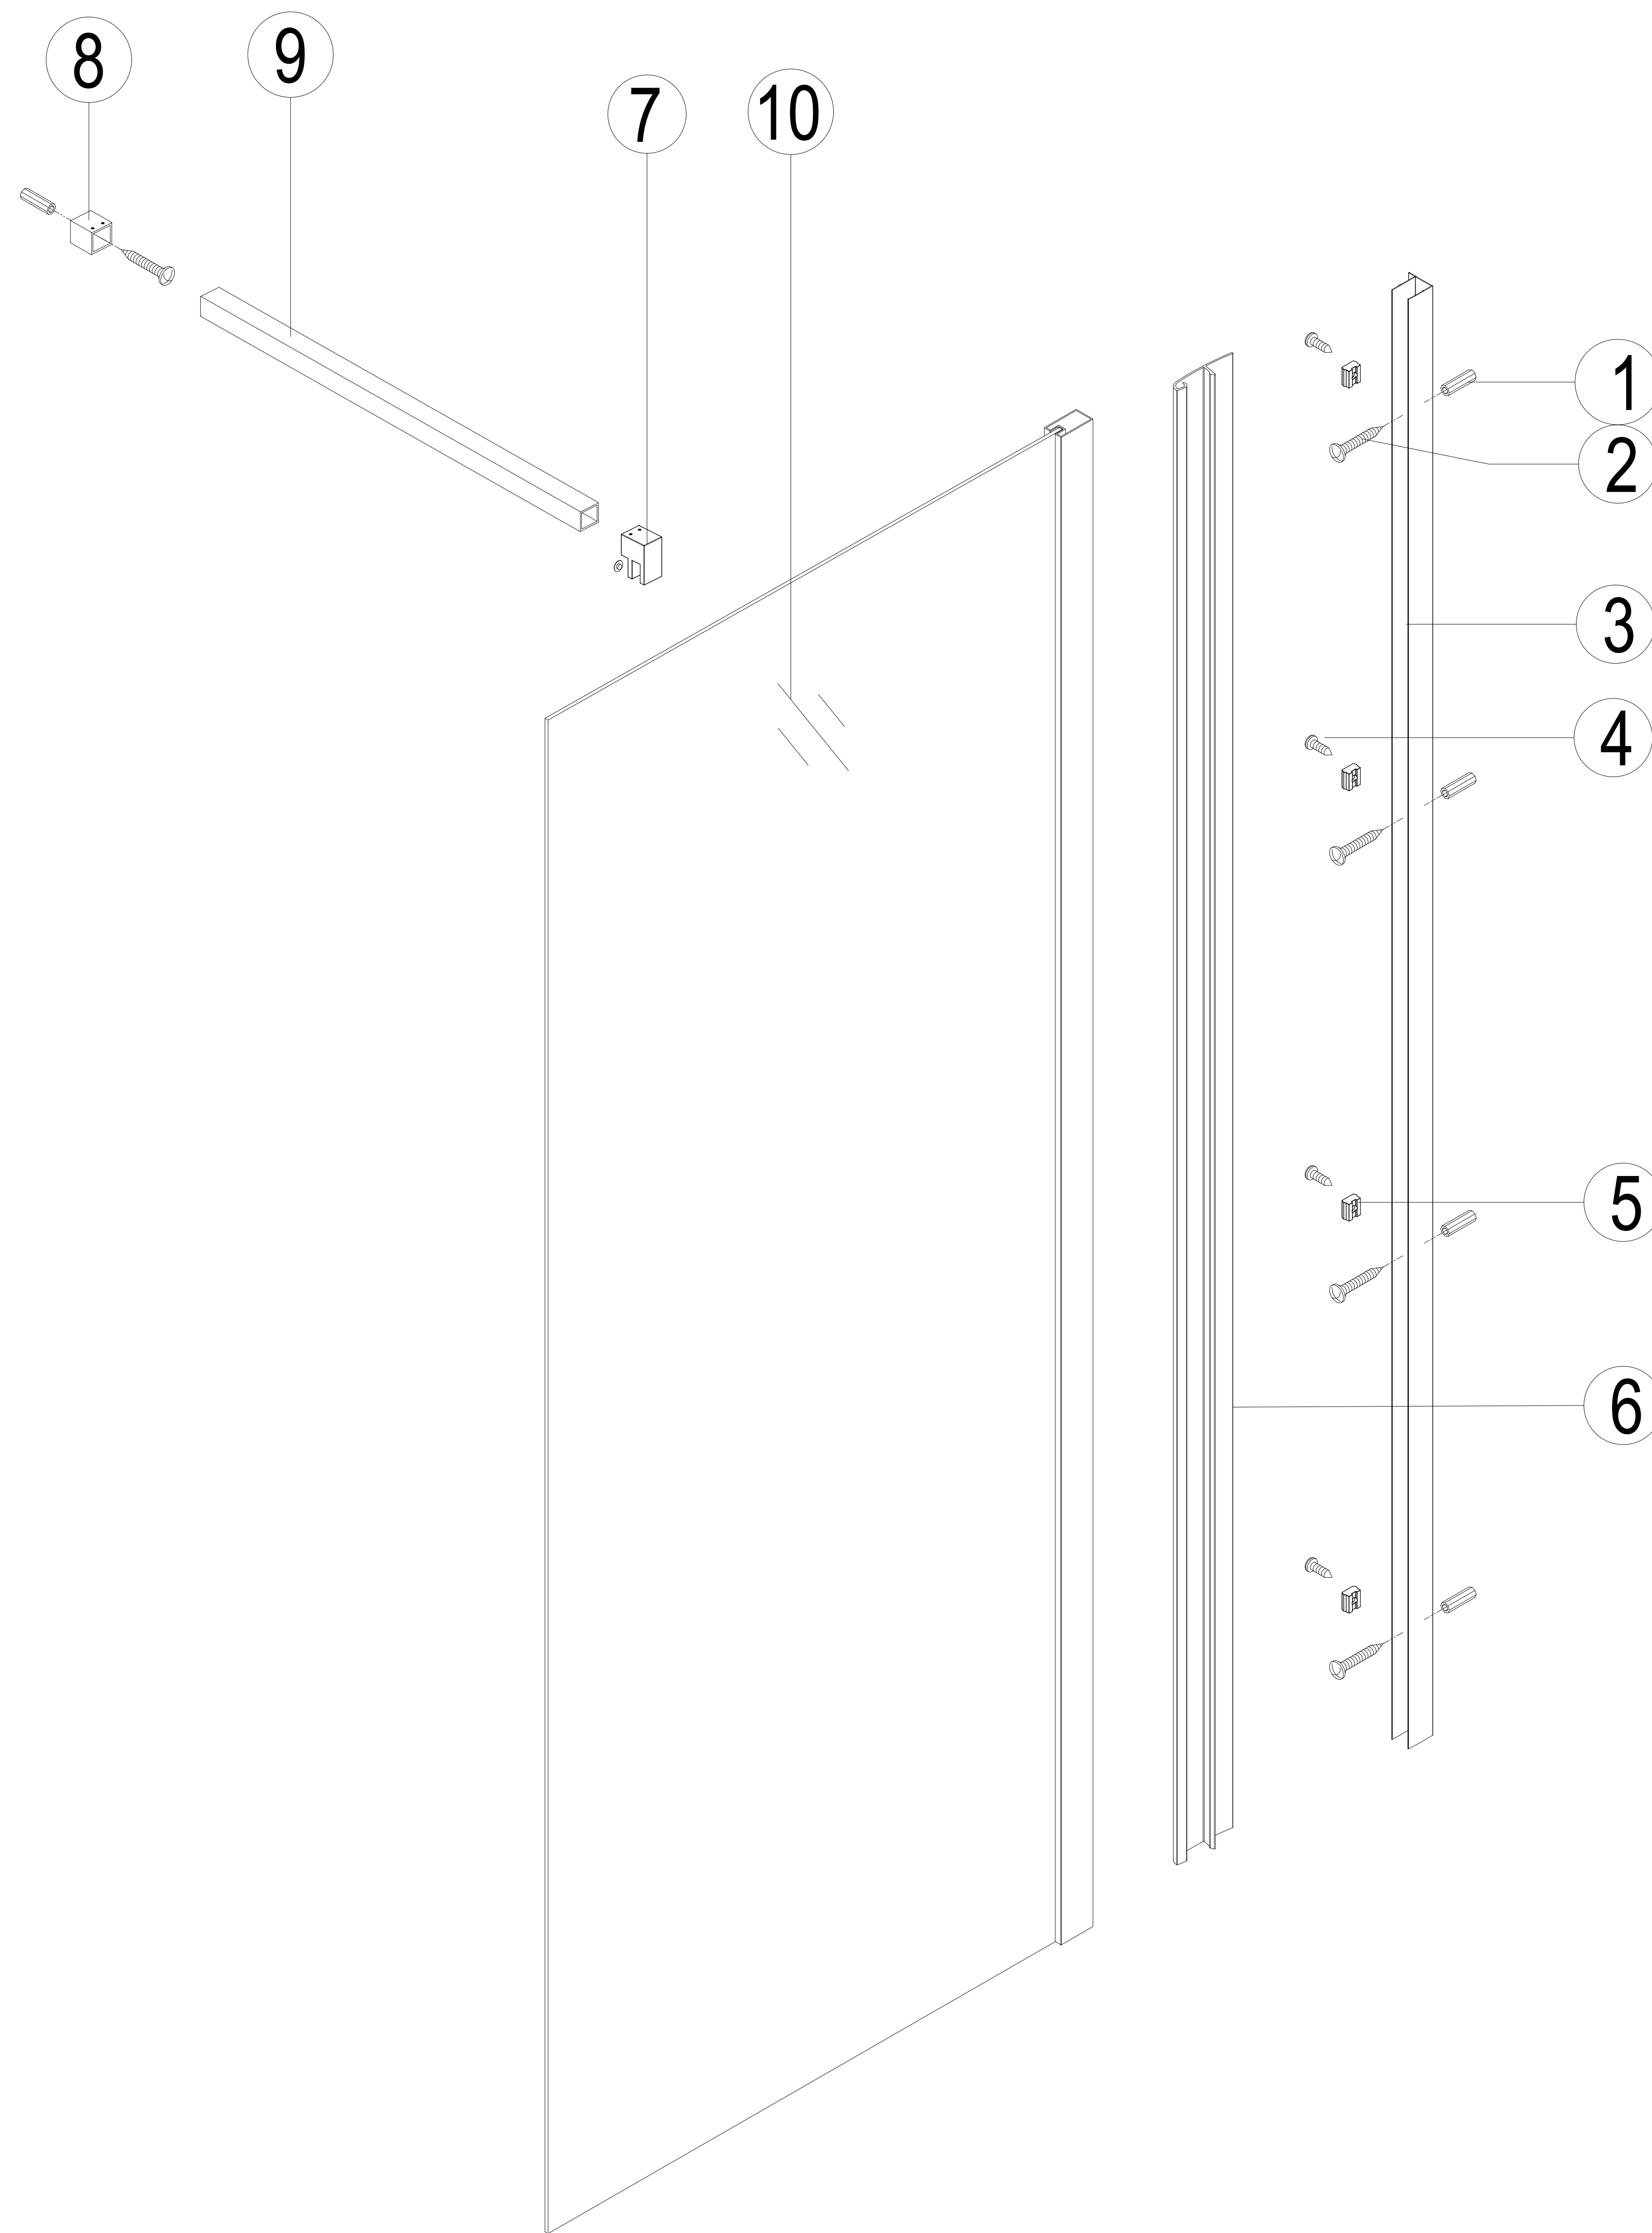
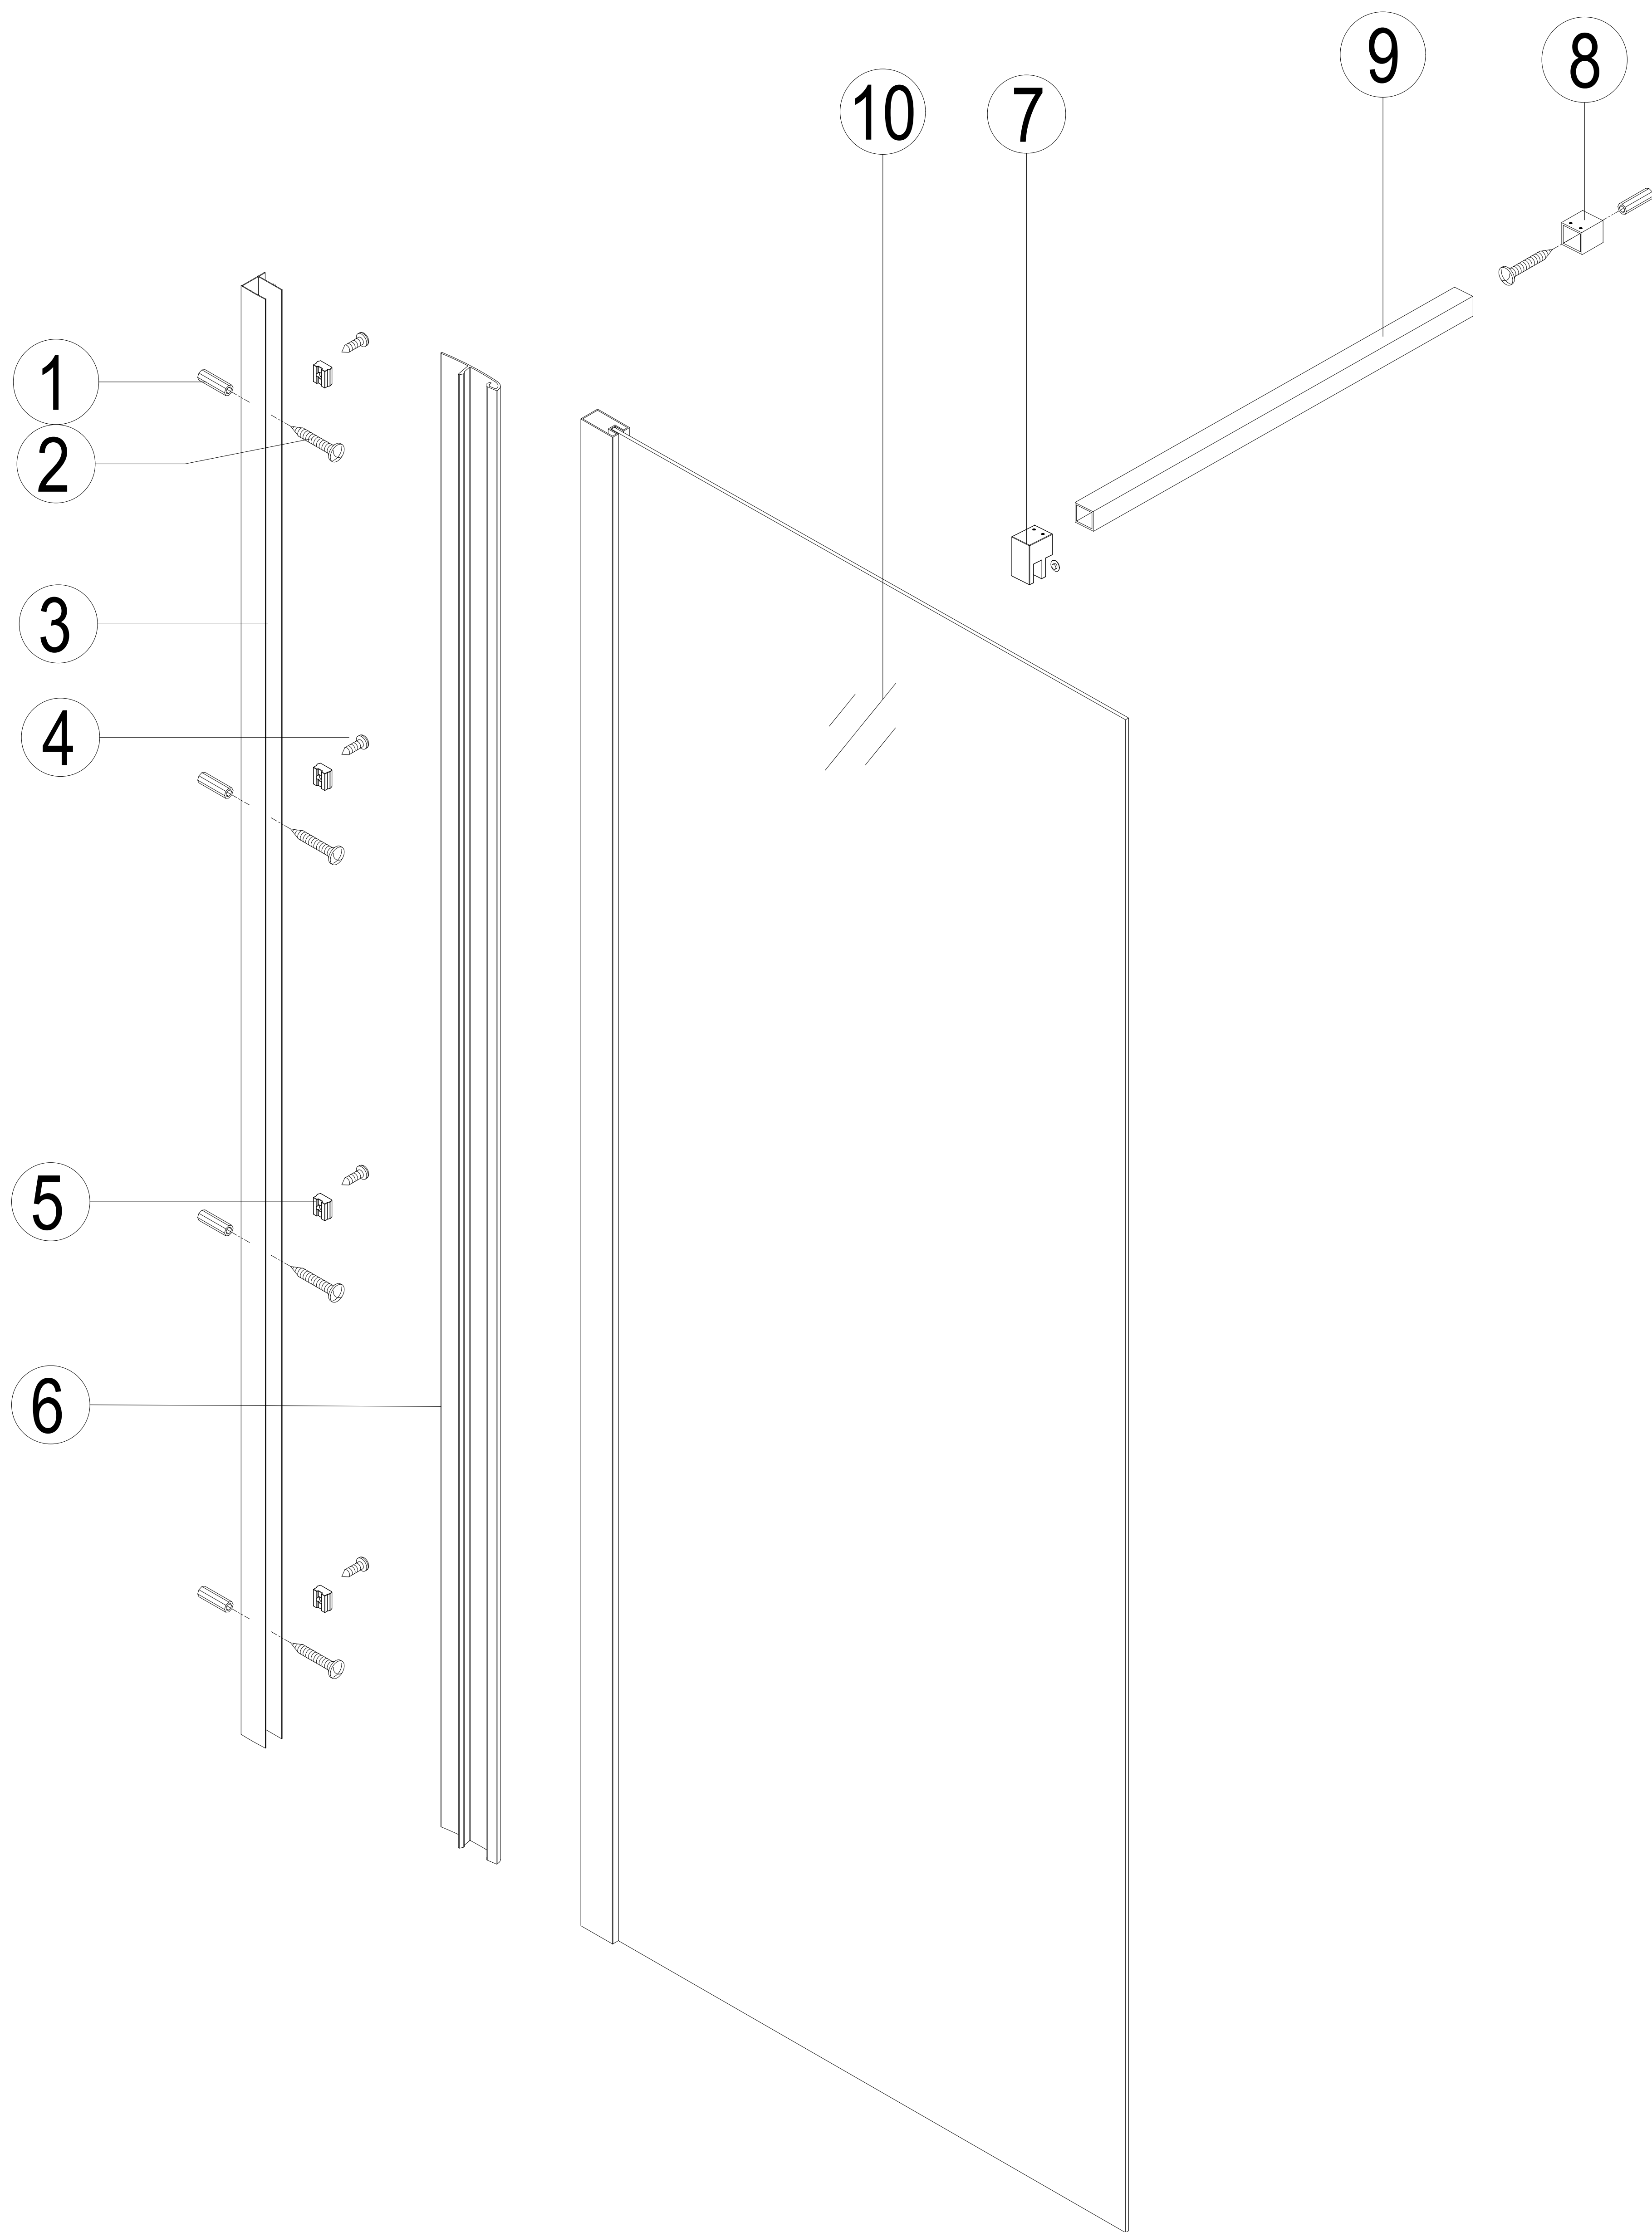
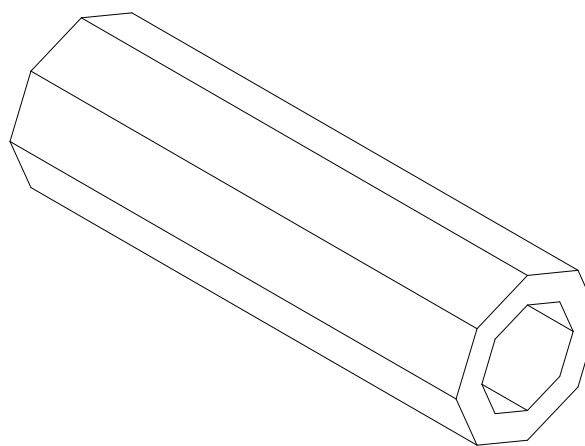
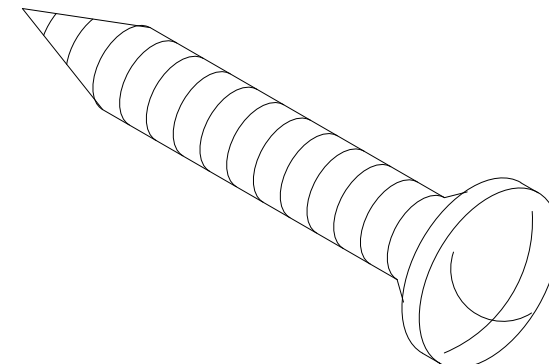
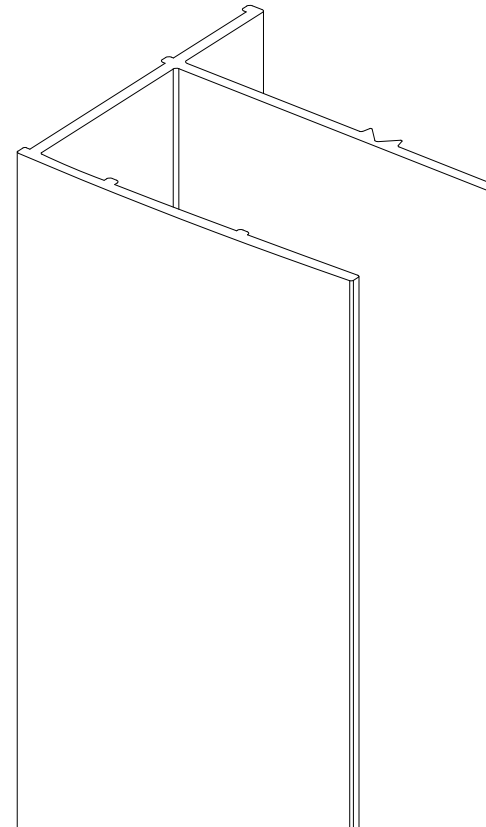

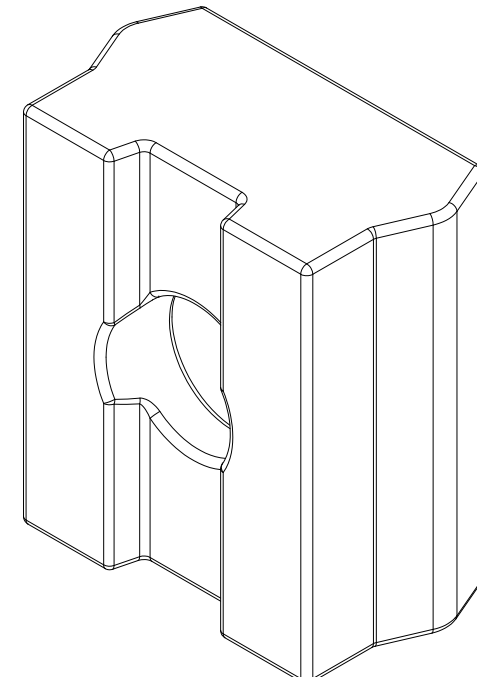
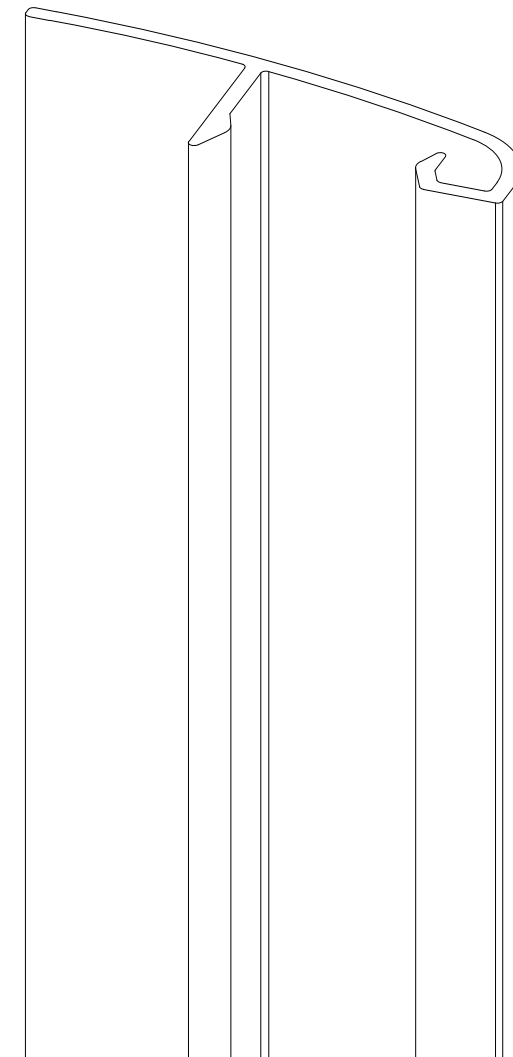
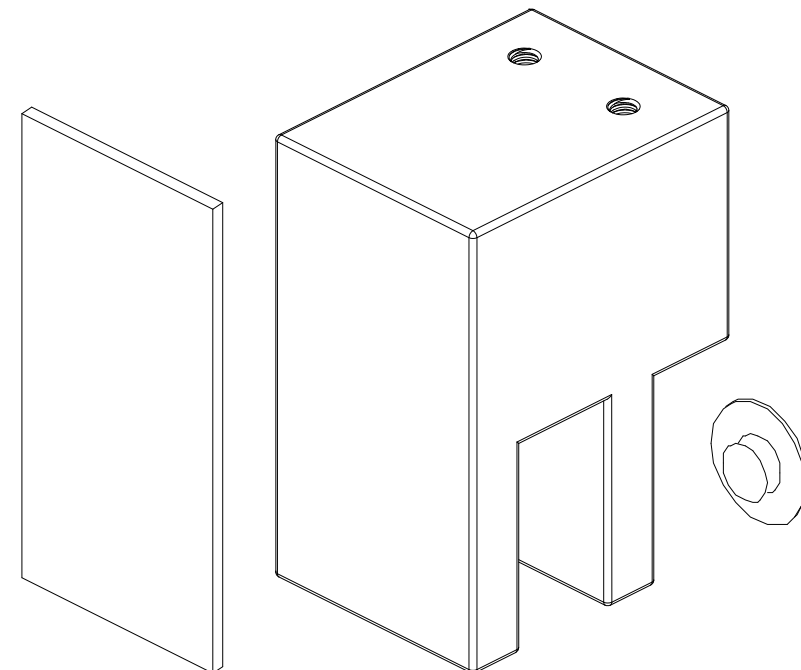
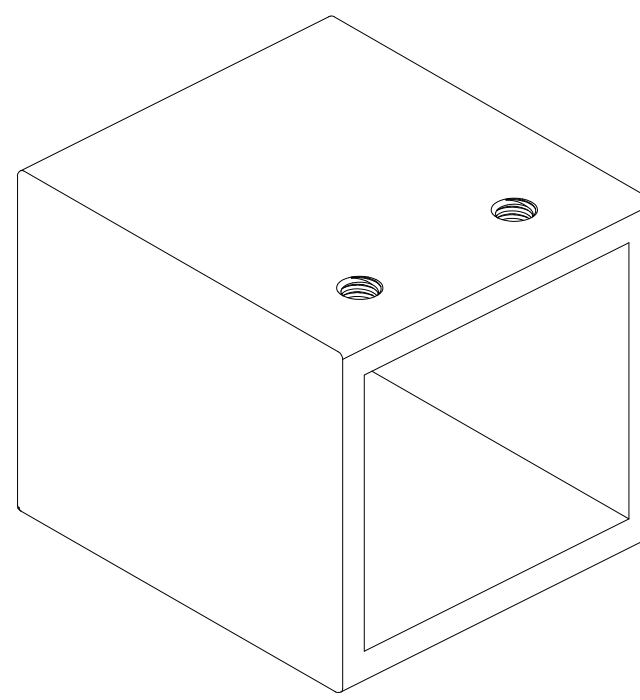
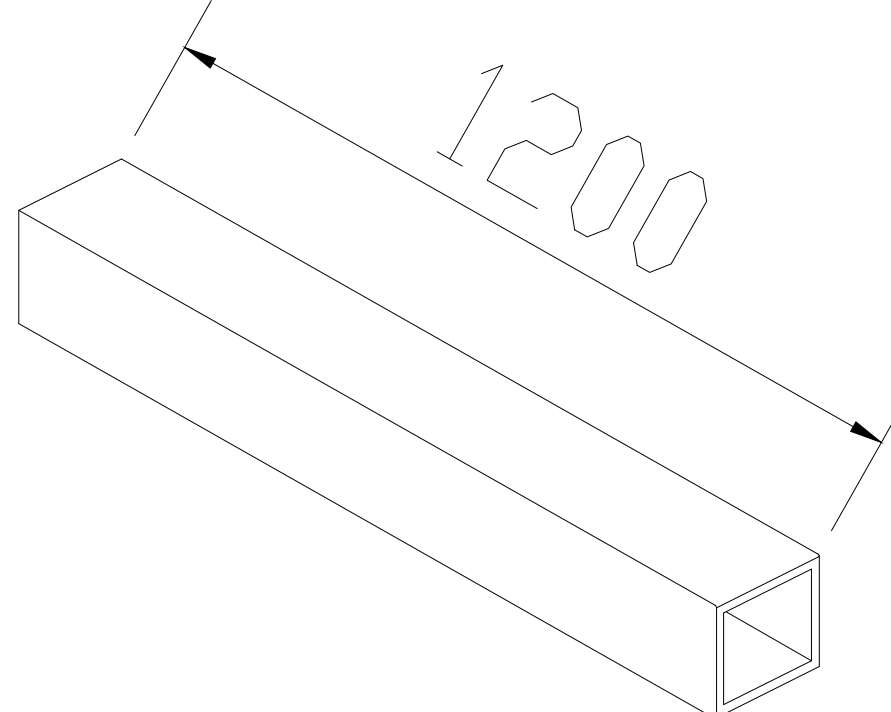







49. 5109/49. 5113/49. 5116/49. 5119

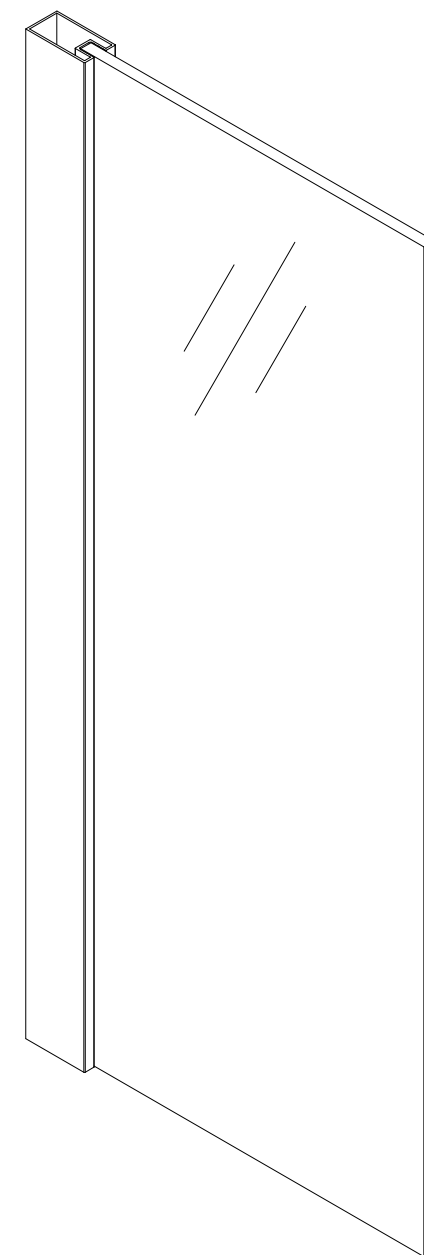

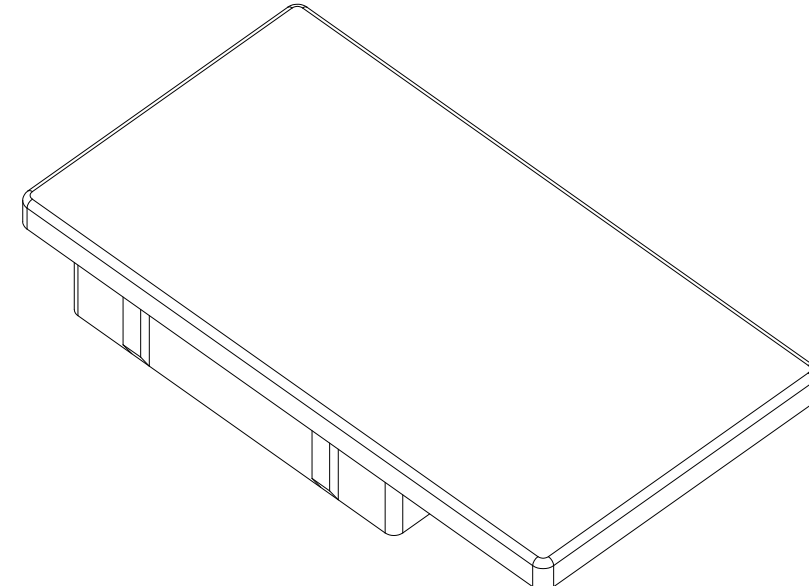

Walkin panel

1	Ø6x30				2	ST4x30				3			4	ST4x12				5			6													
D6x30		5Pcs		ST4x30		5Pcs		JRSF-W01		1Pc		ST4x12		4Pcs		JRF-6Y01		4Pcs		JRSF-W02		1Pcs												
7			JRSF-X02-6		1Pc		8			JRSF-X01		1Pc		9			JRSF005F-X01		1Pc		10			BWE-S03		1Pc		11			BWE-S01		2Pc	
JRSF-X02-6		1Pc		JRSF-X01		1Pc		JRSF005F-X01		1Pc		BWE-S03		1Pc		BWE-S01		2Pc		L		R												

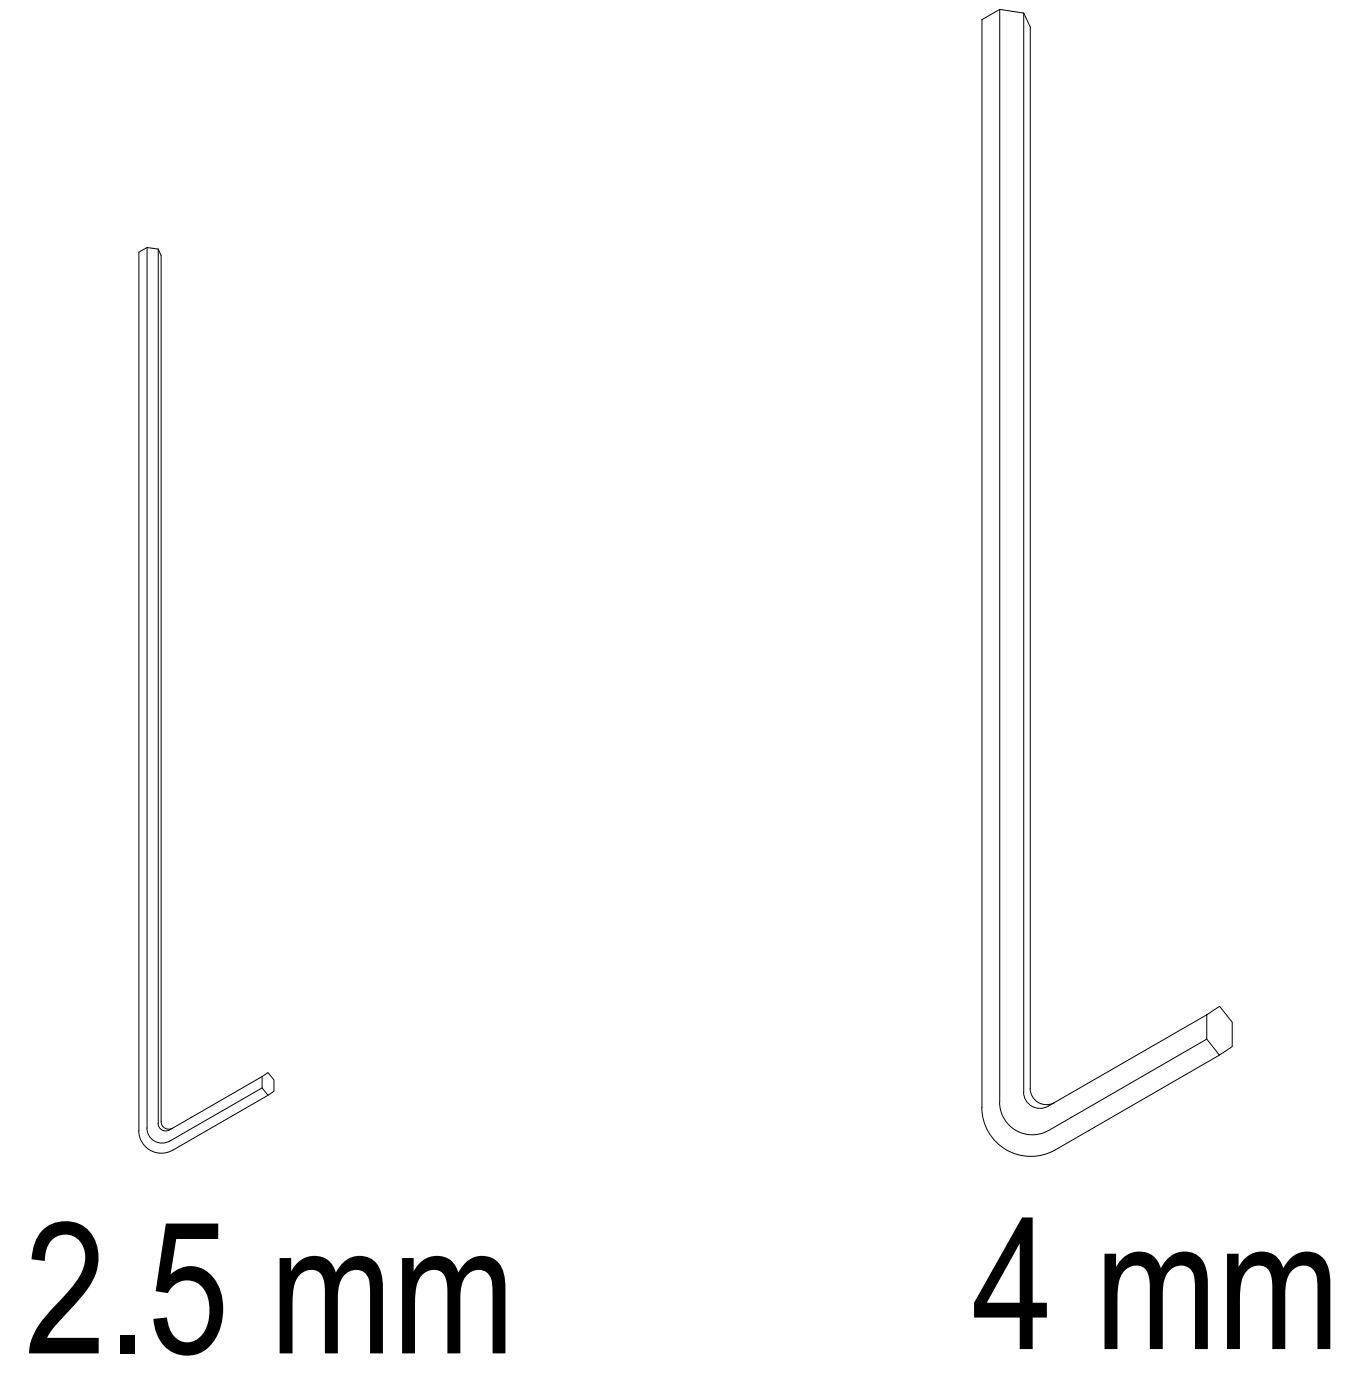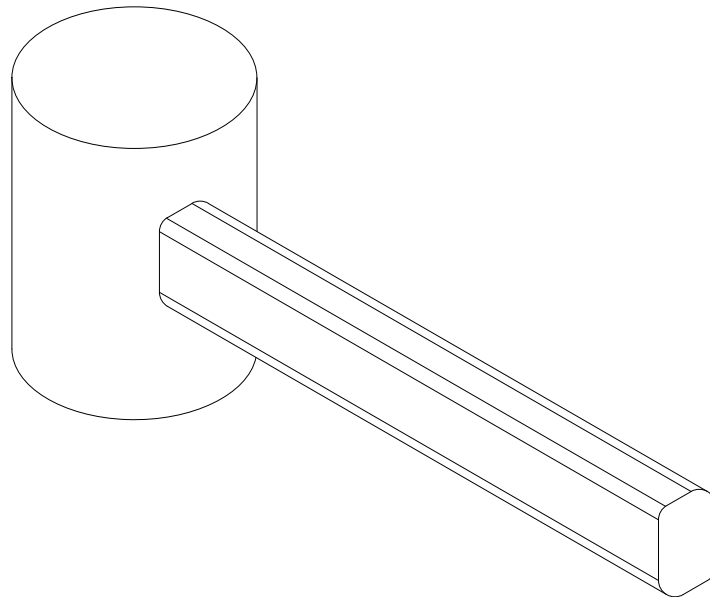
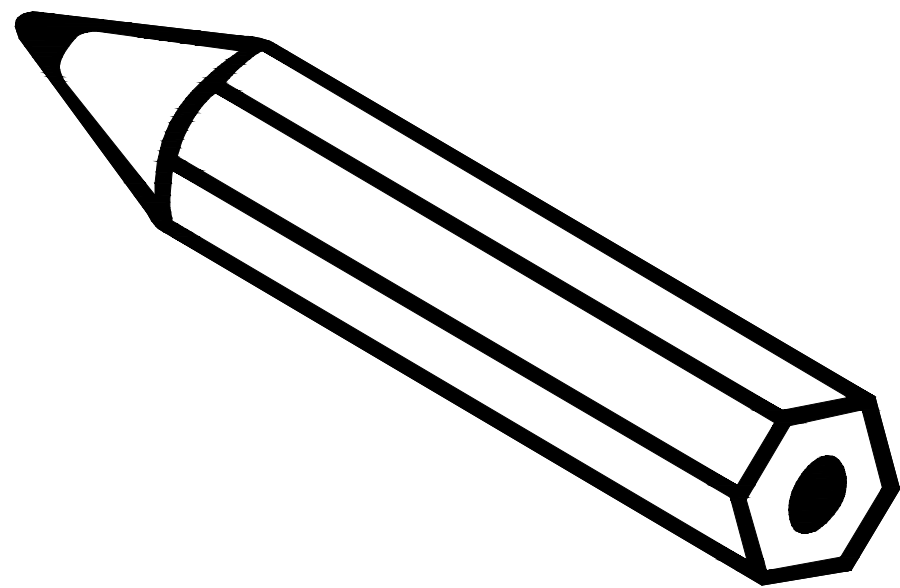
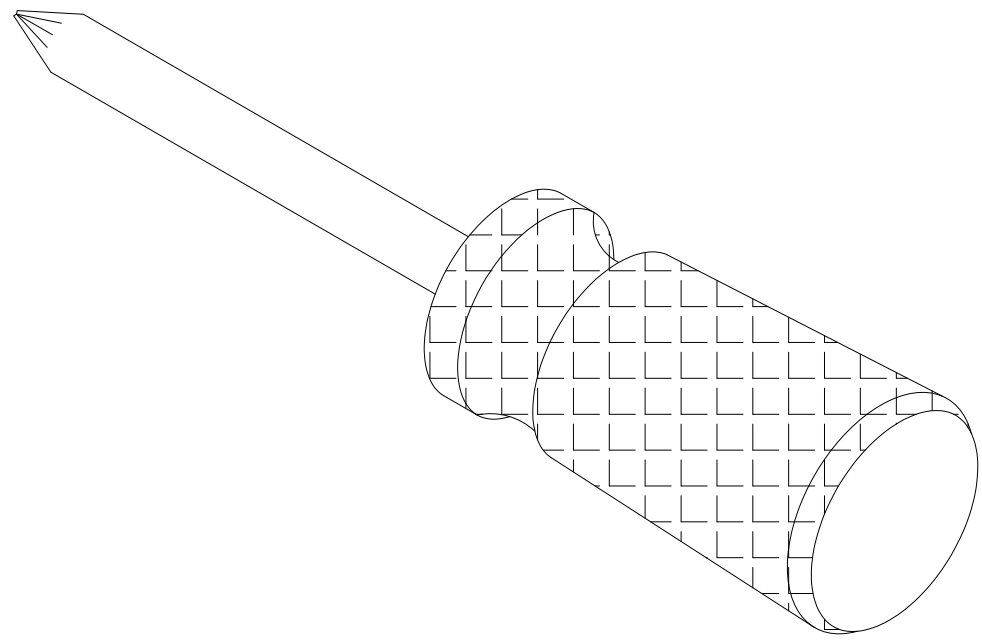
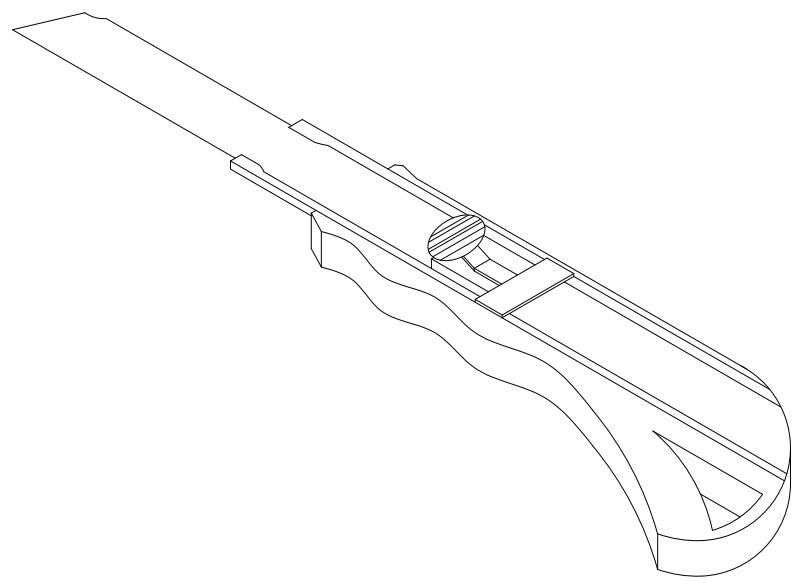


2.5 mm



4 mm

Ø6mm



Ø3.2mm

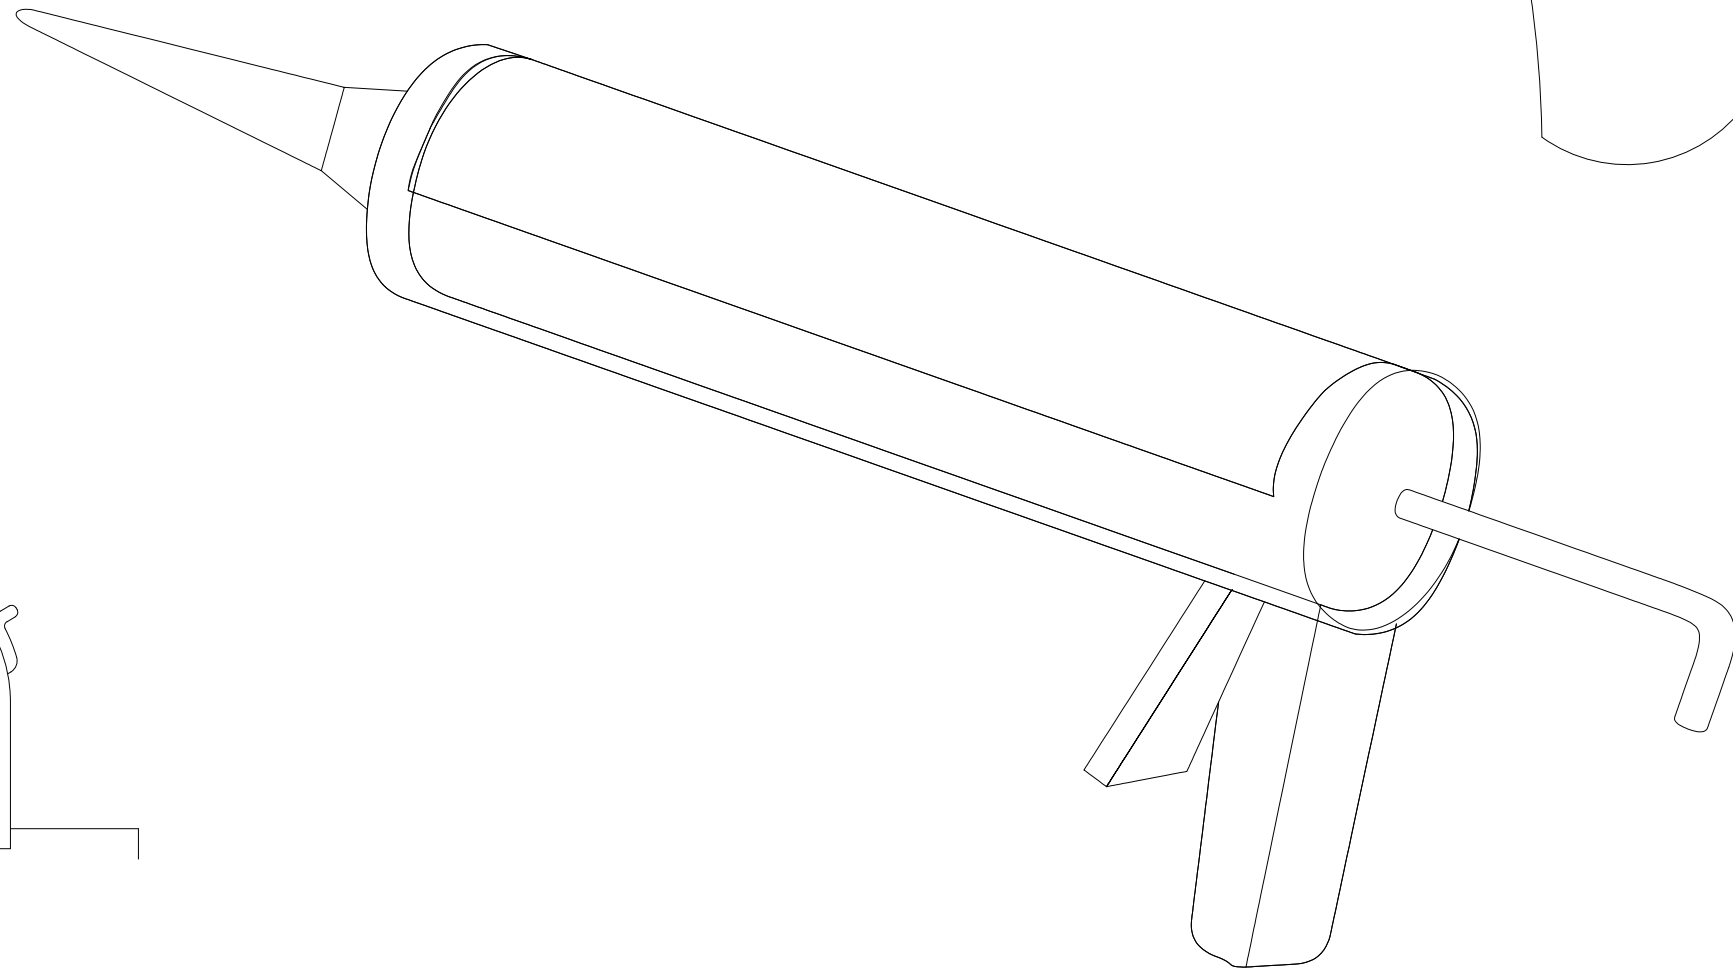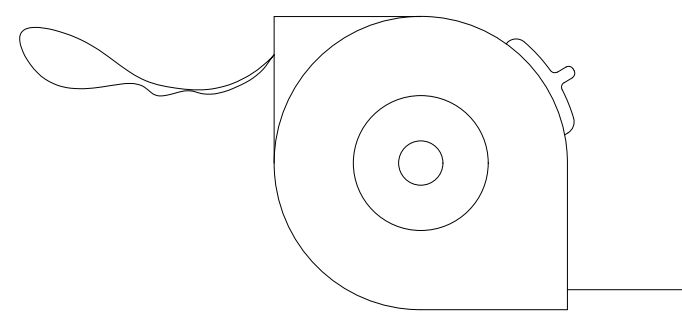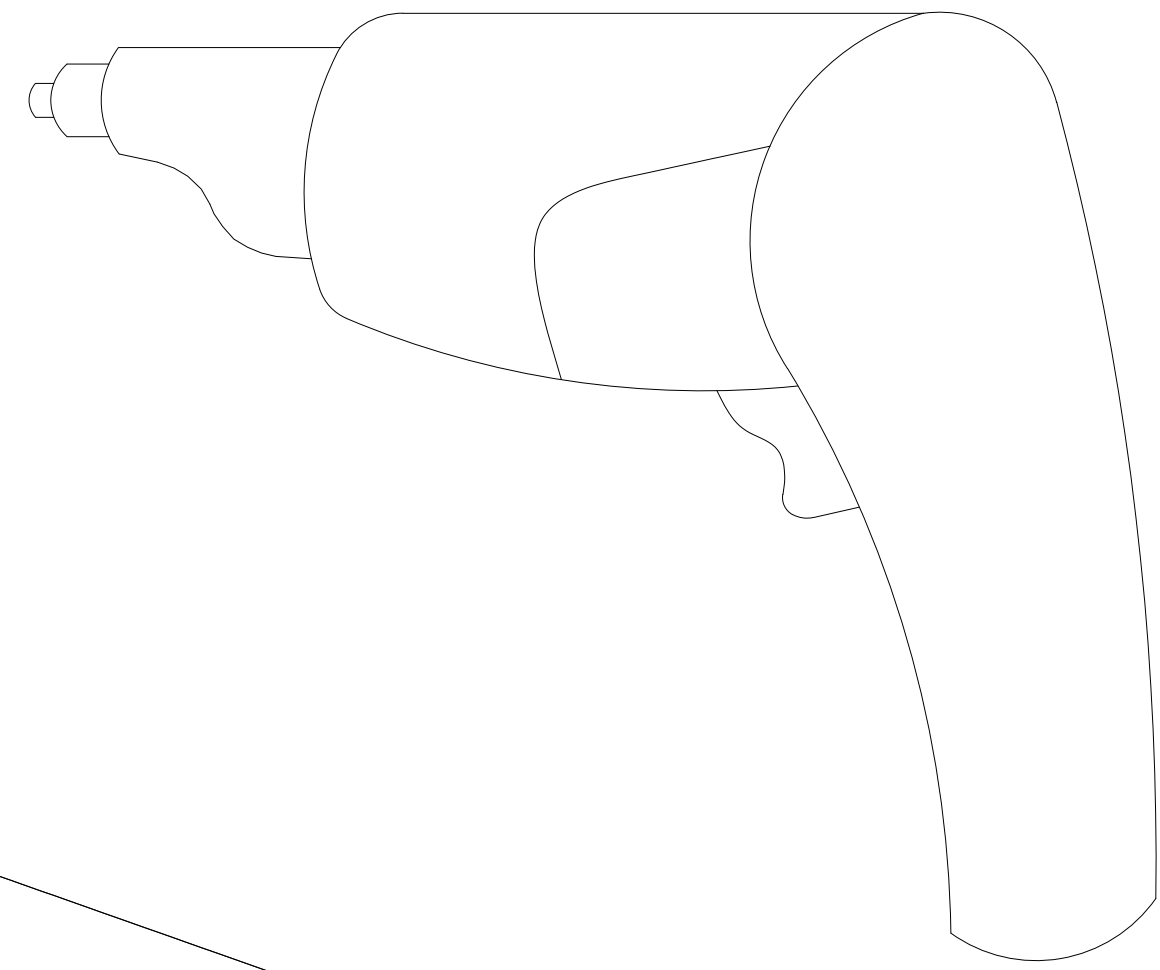



1L

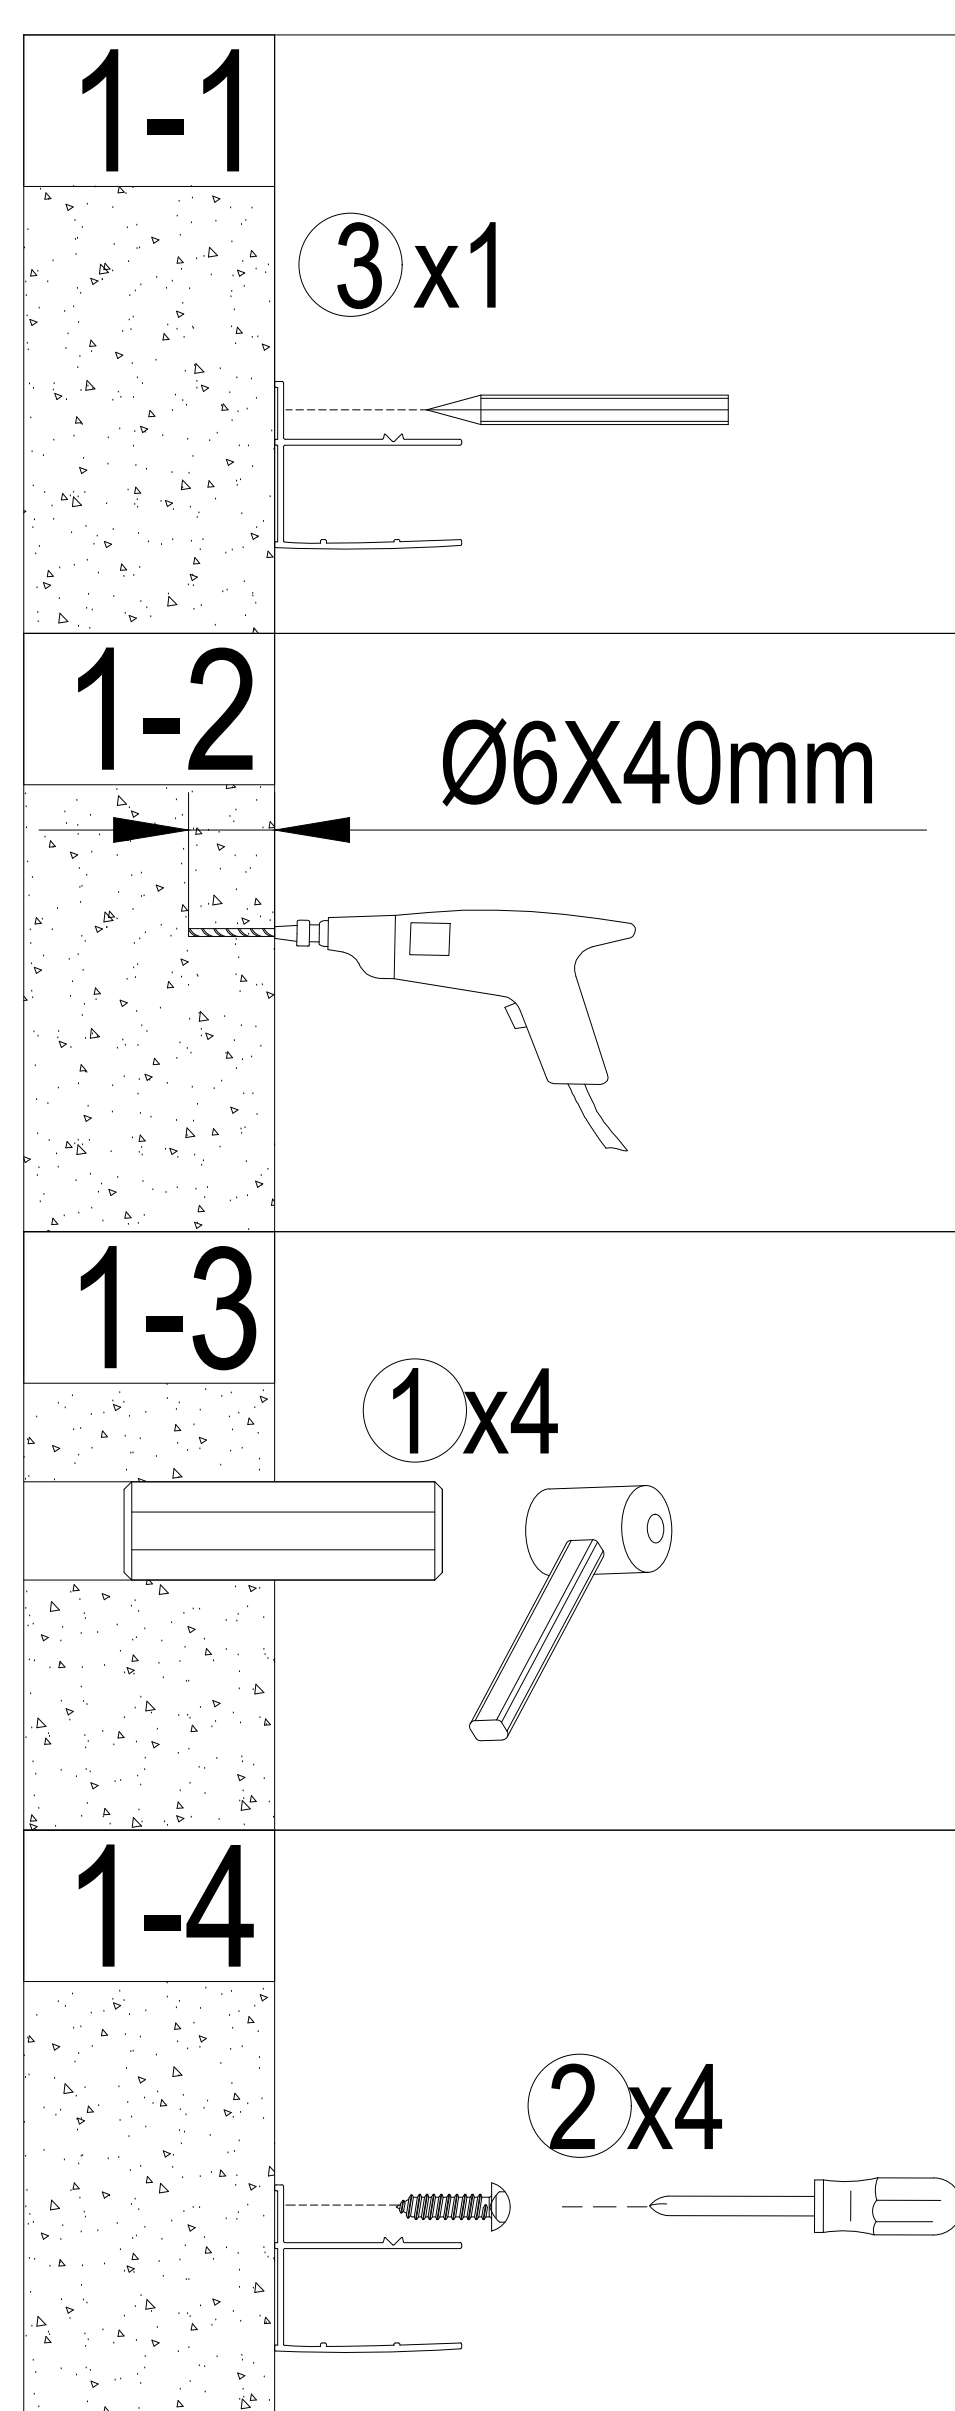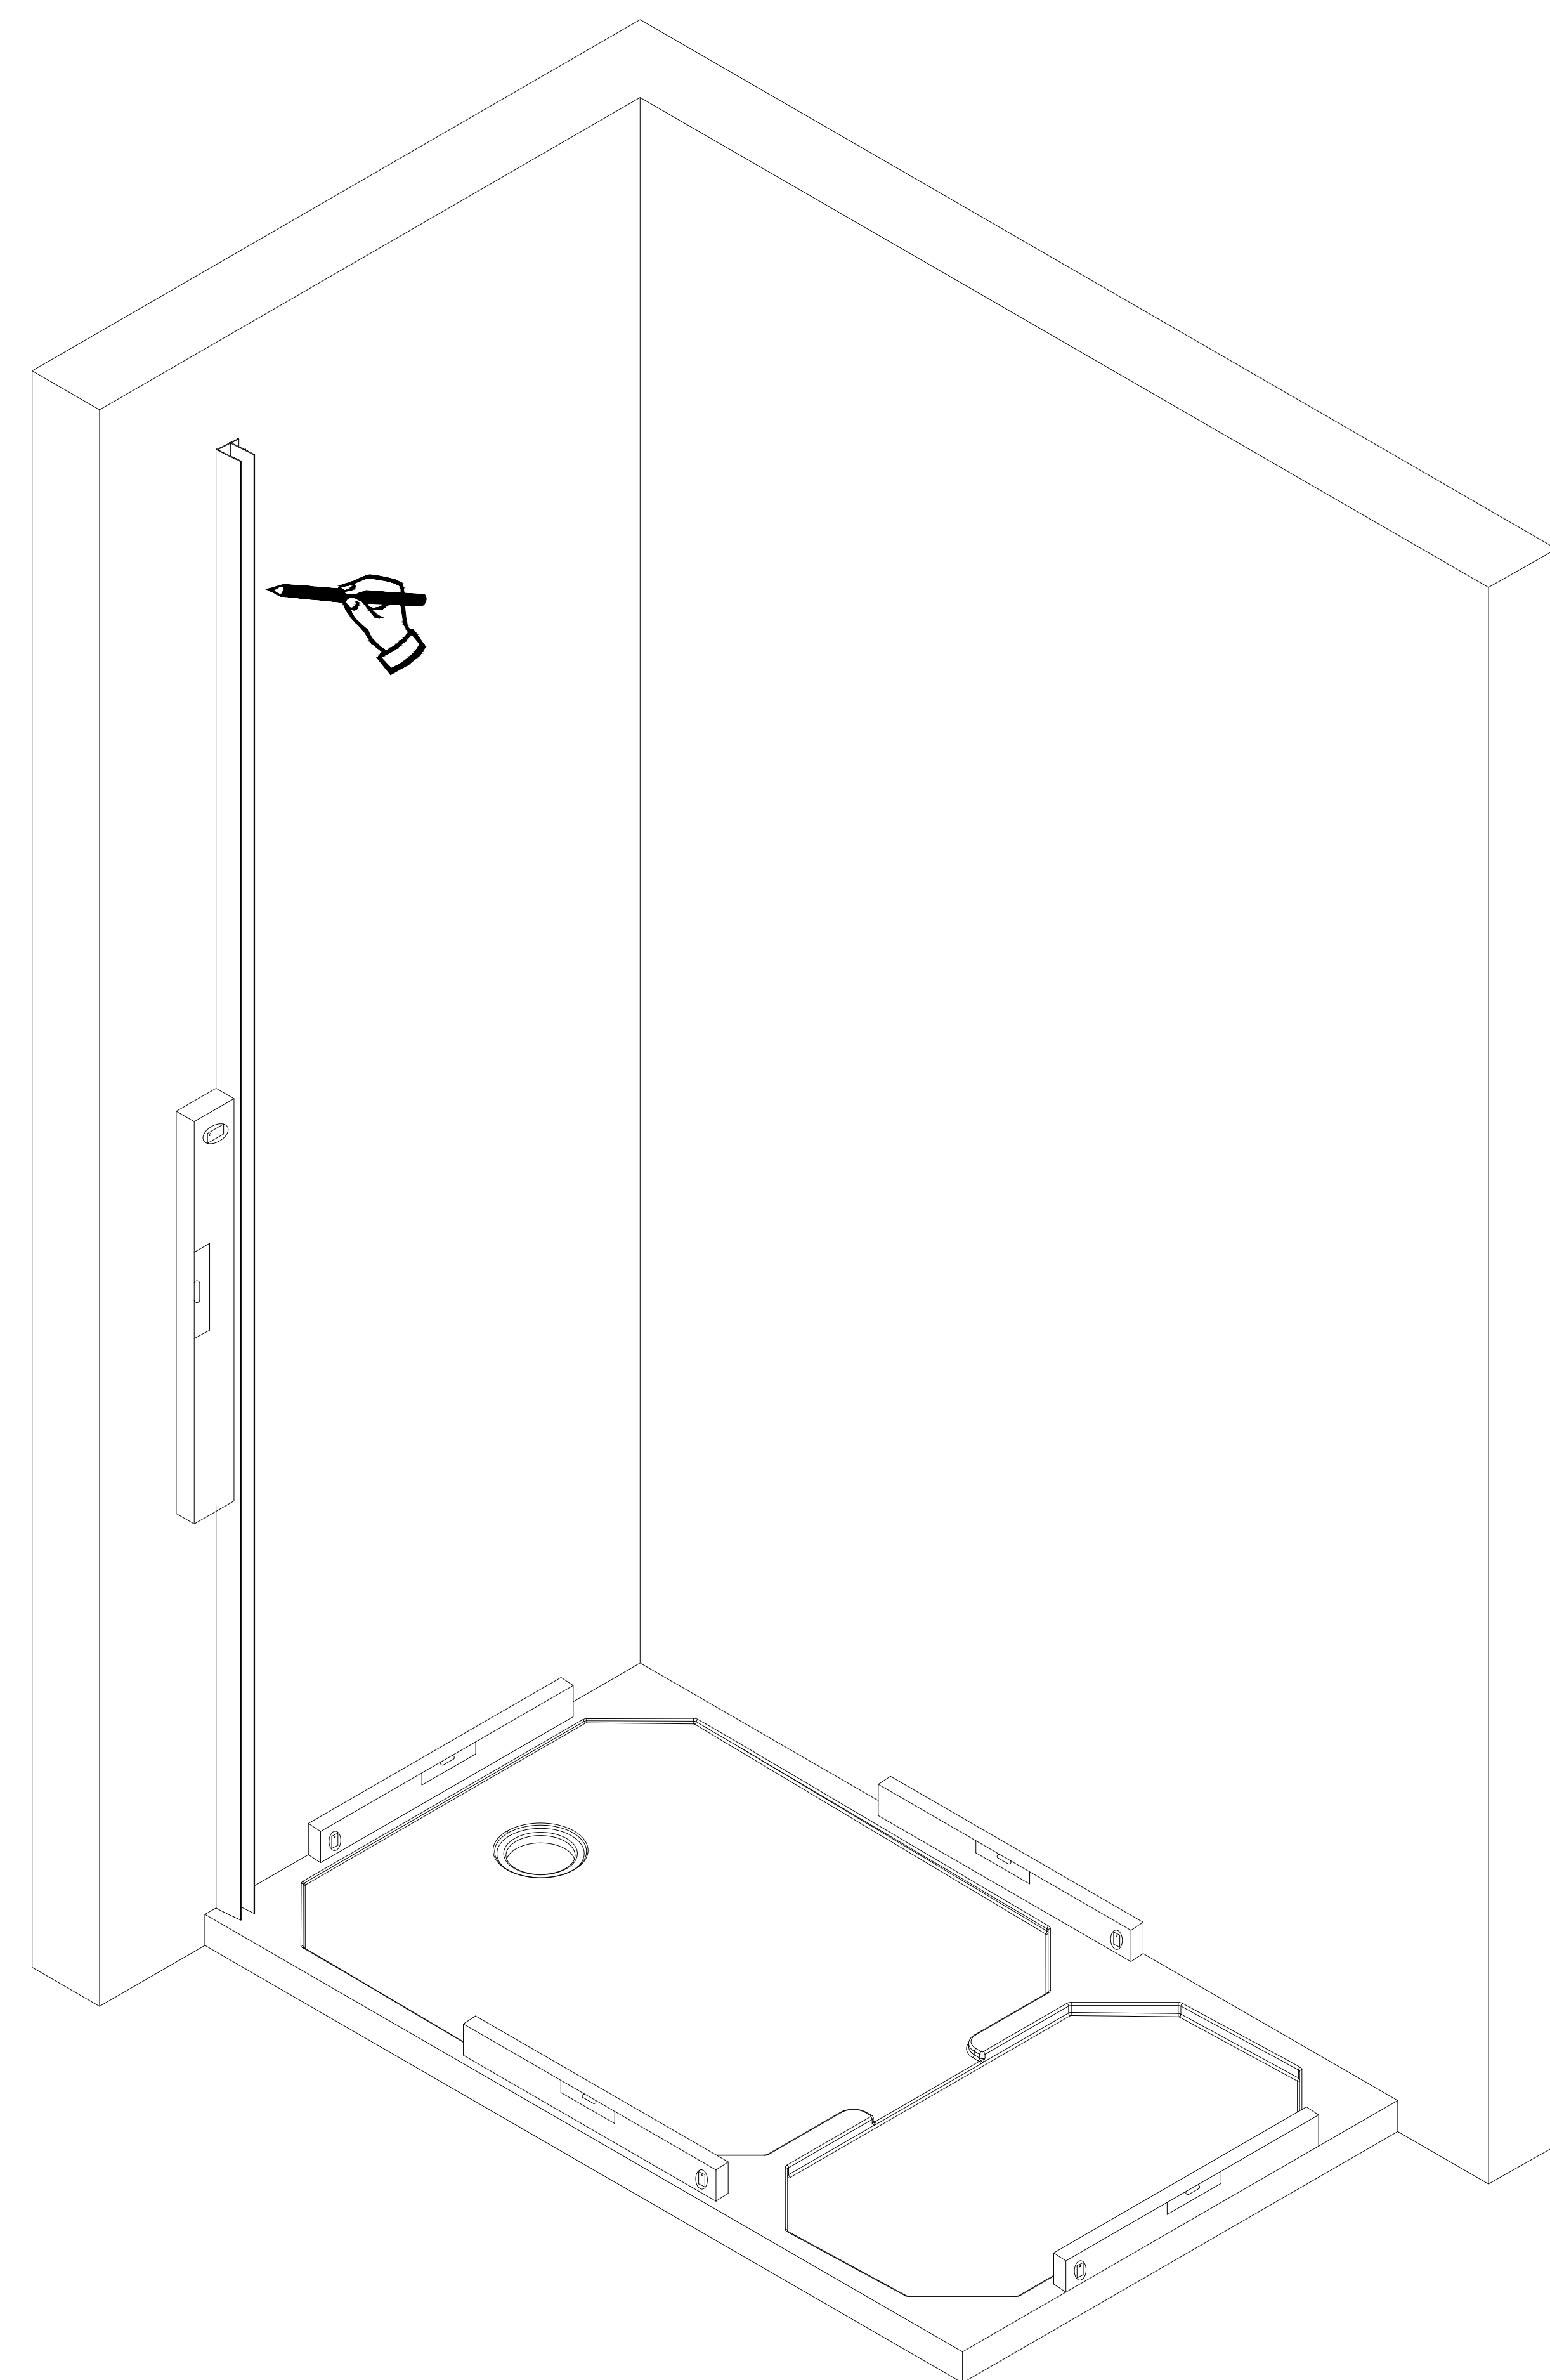



1R

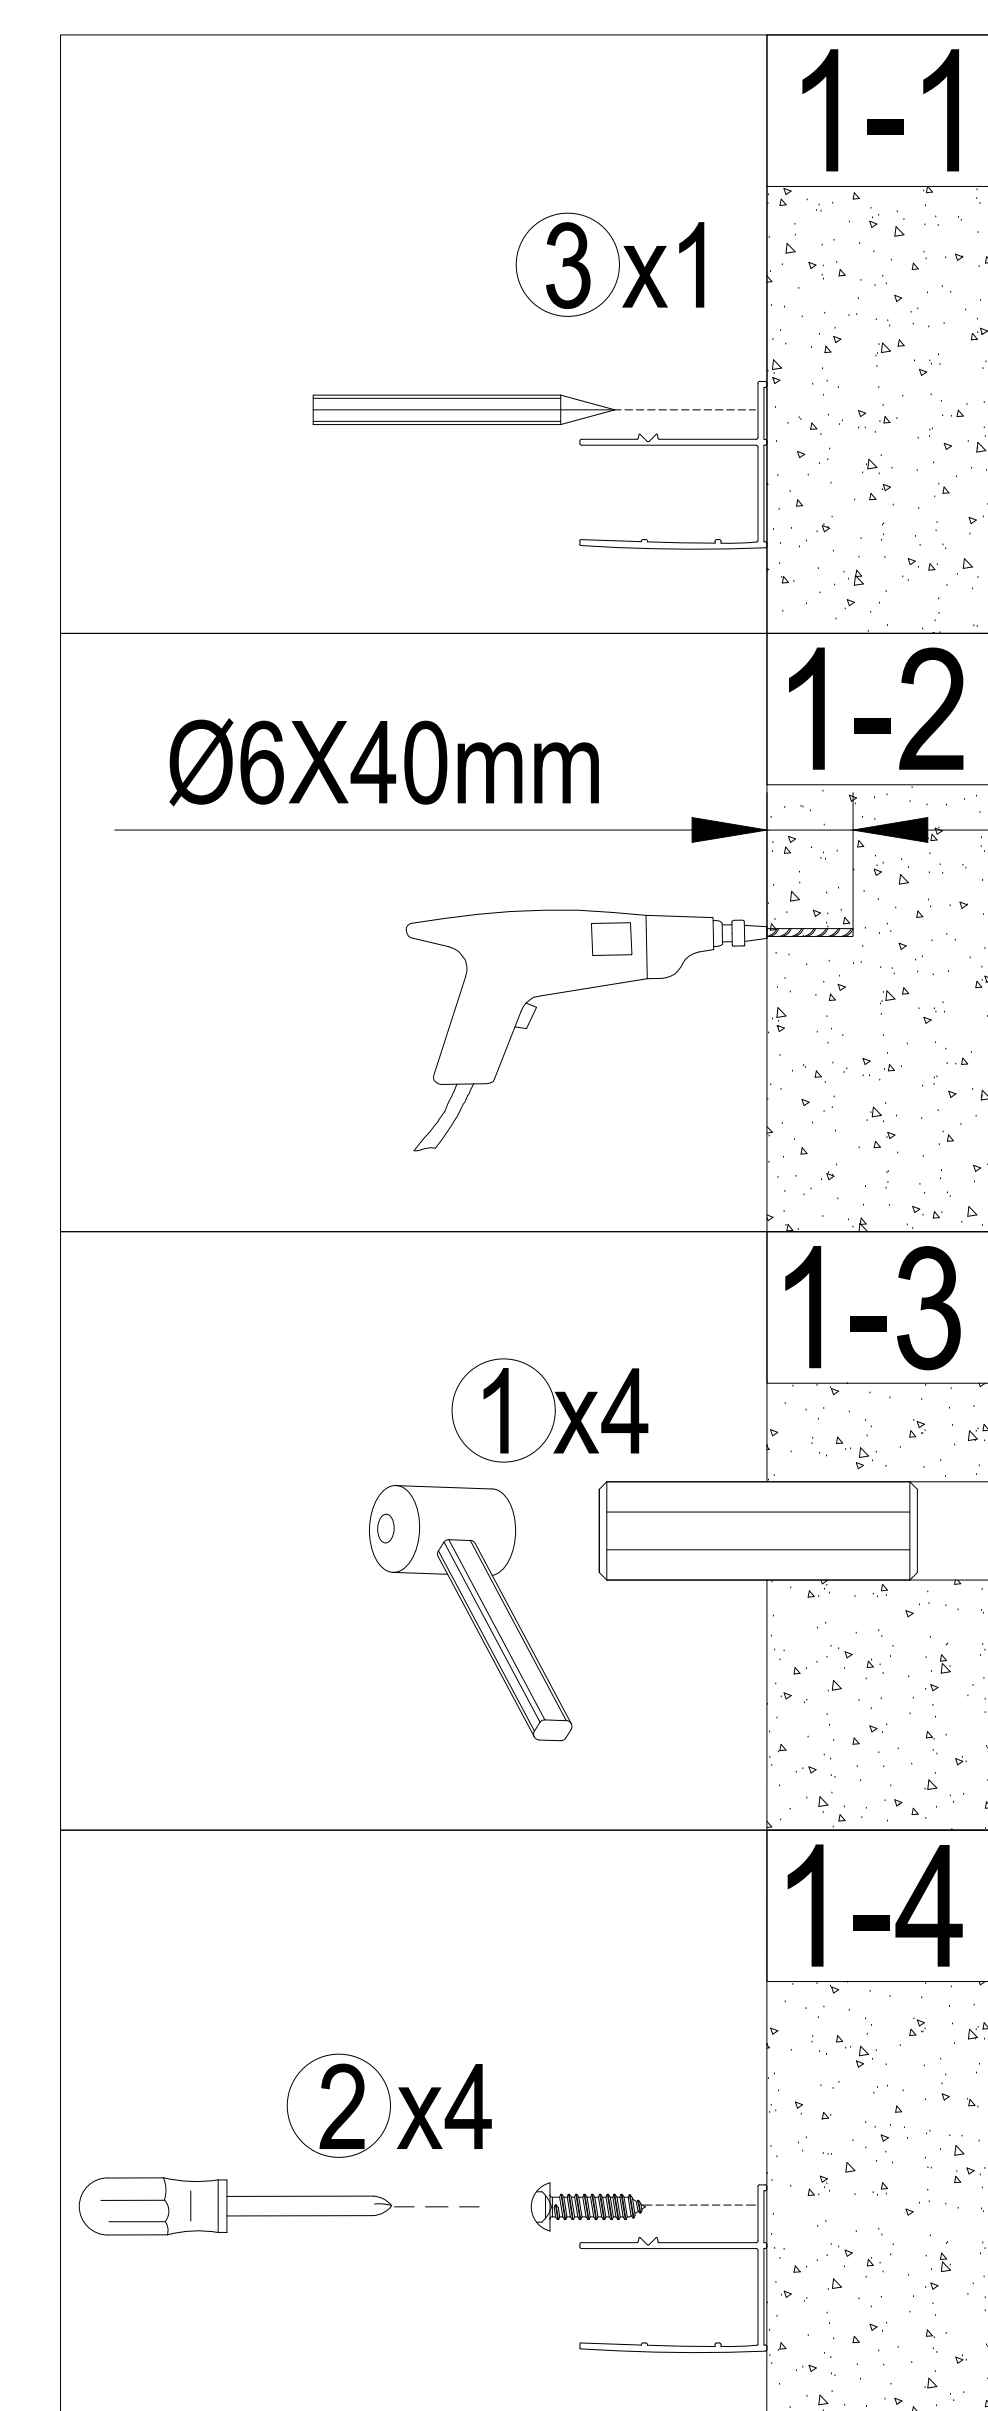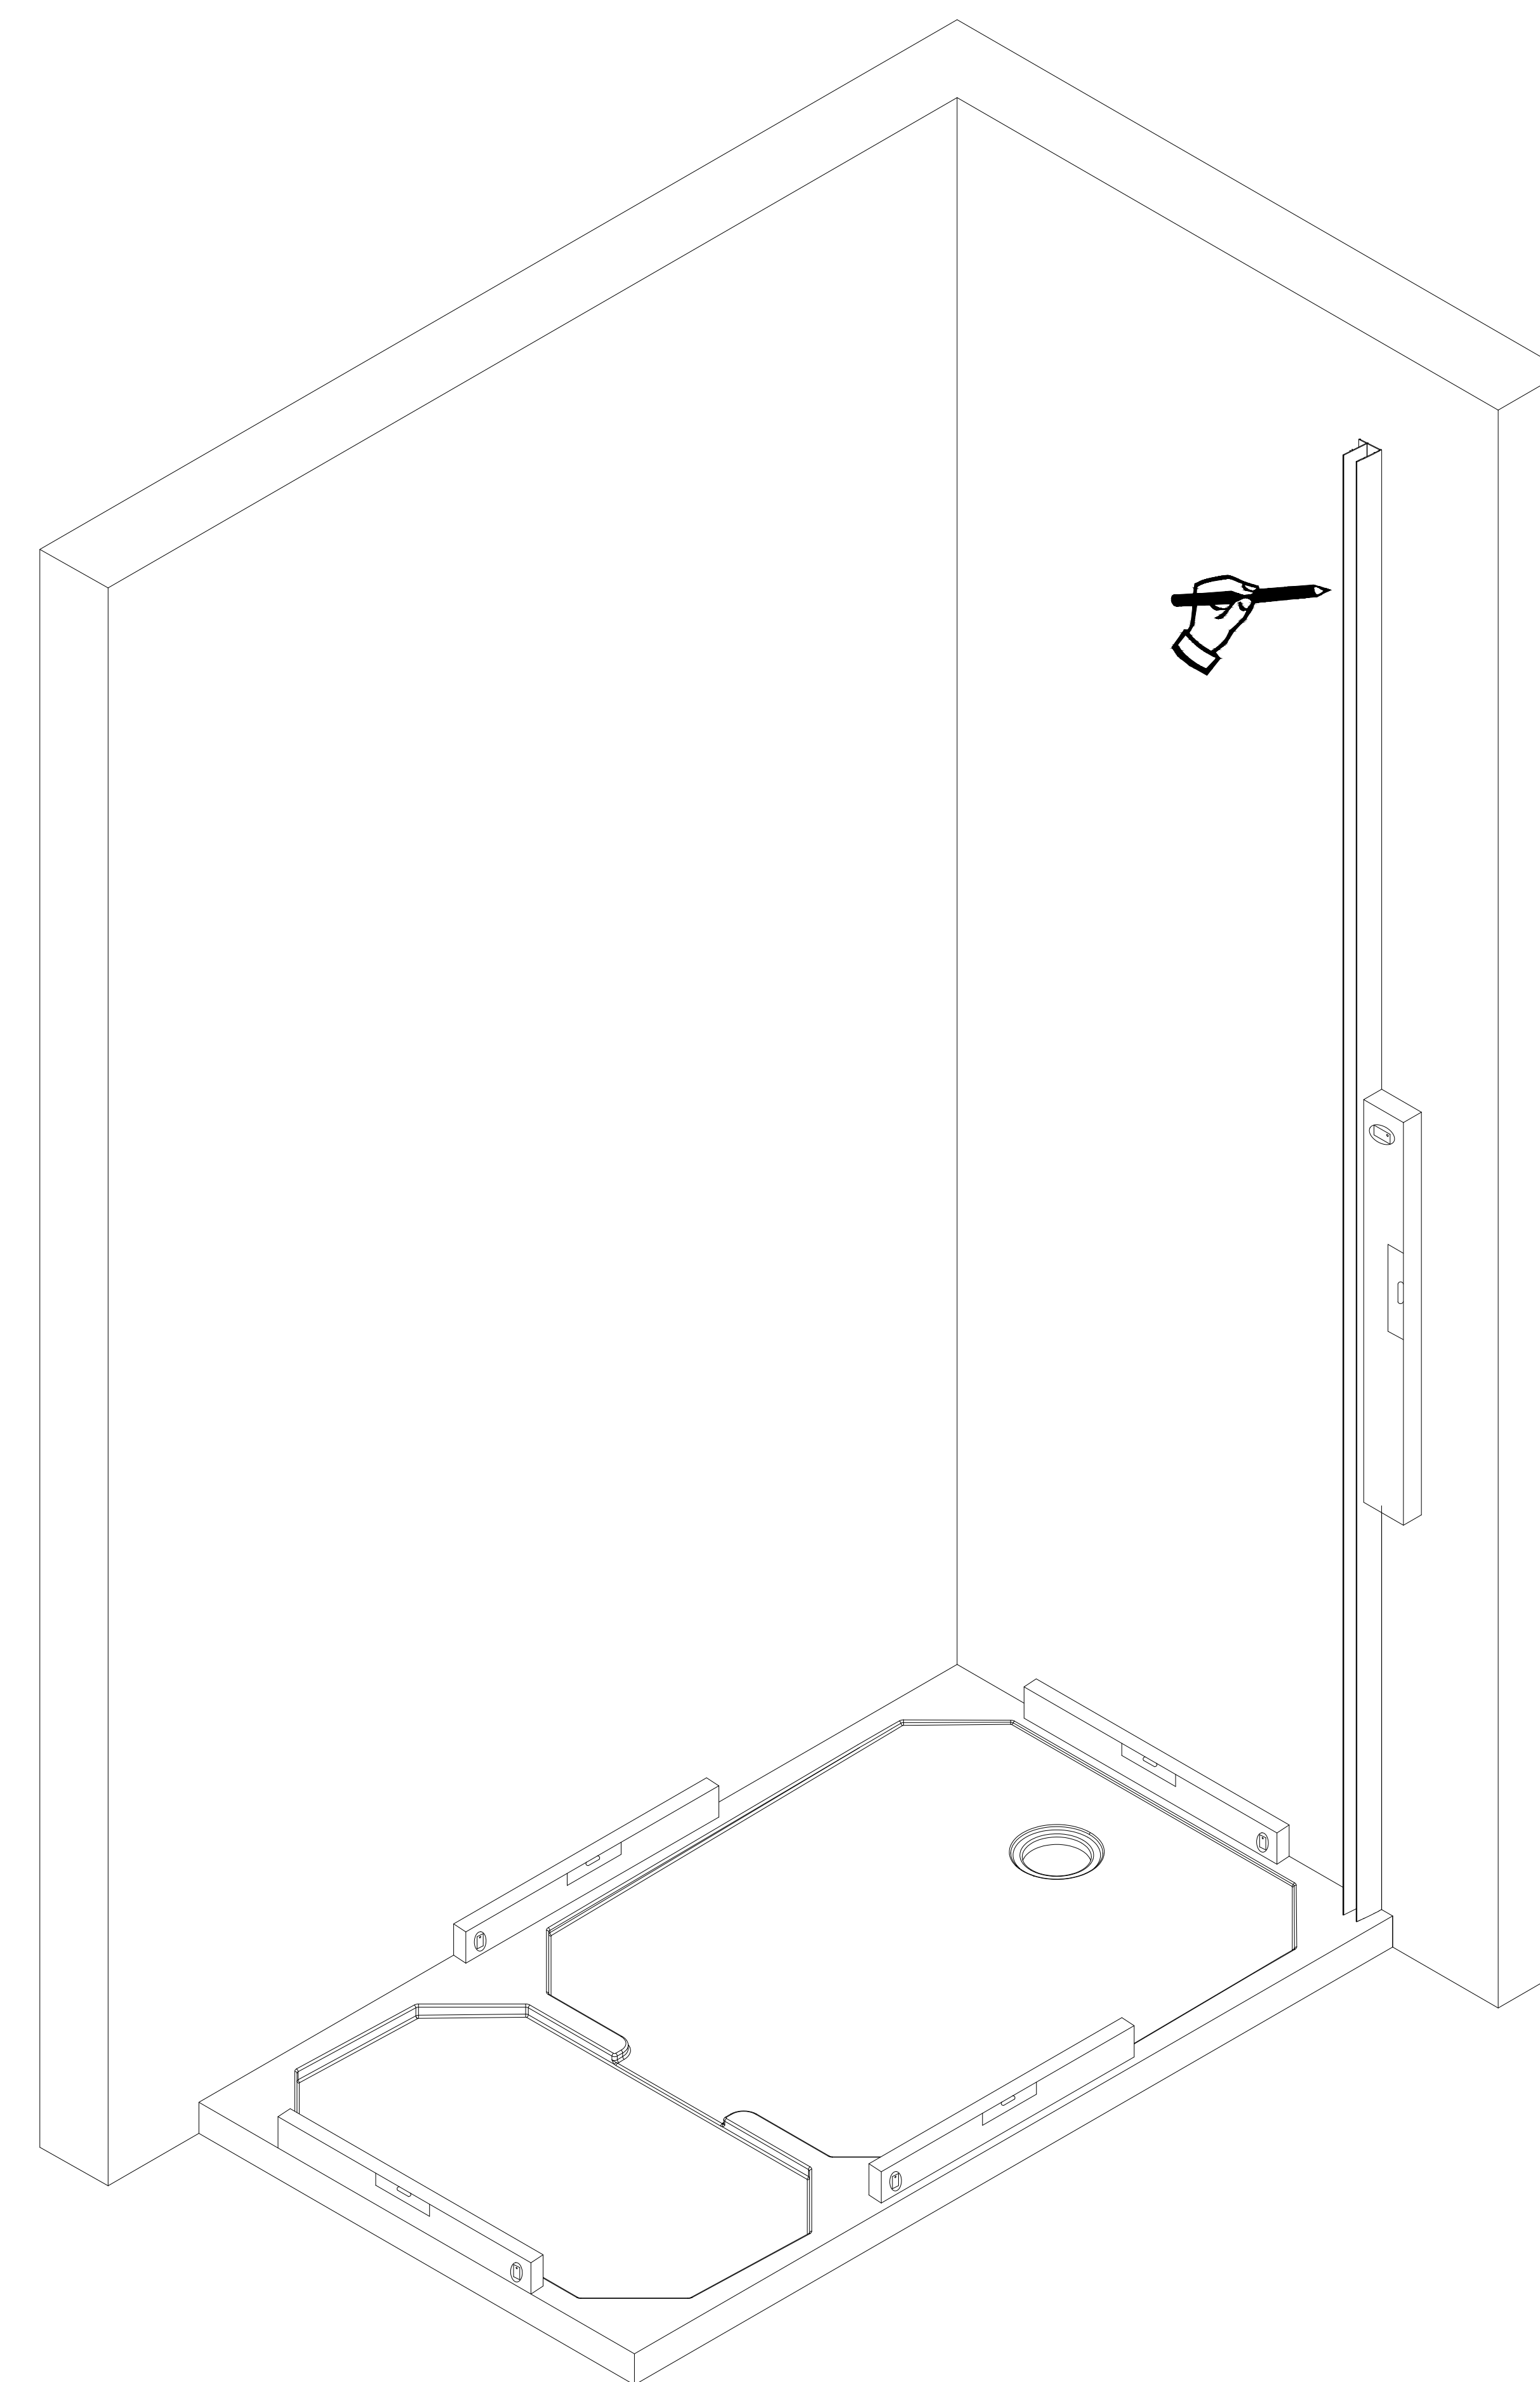




2L

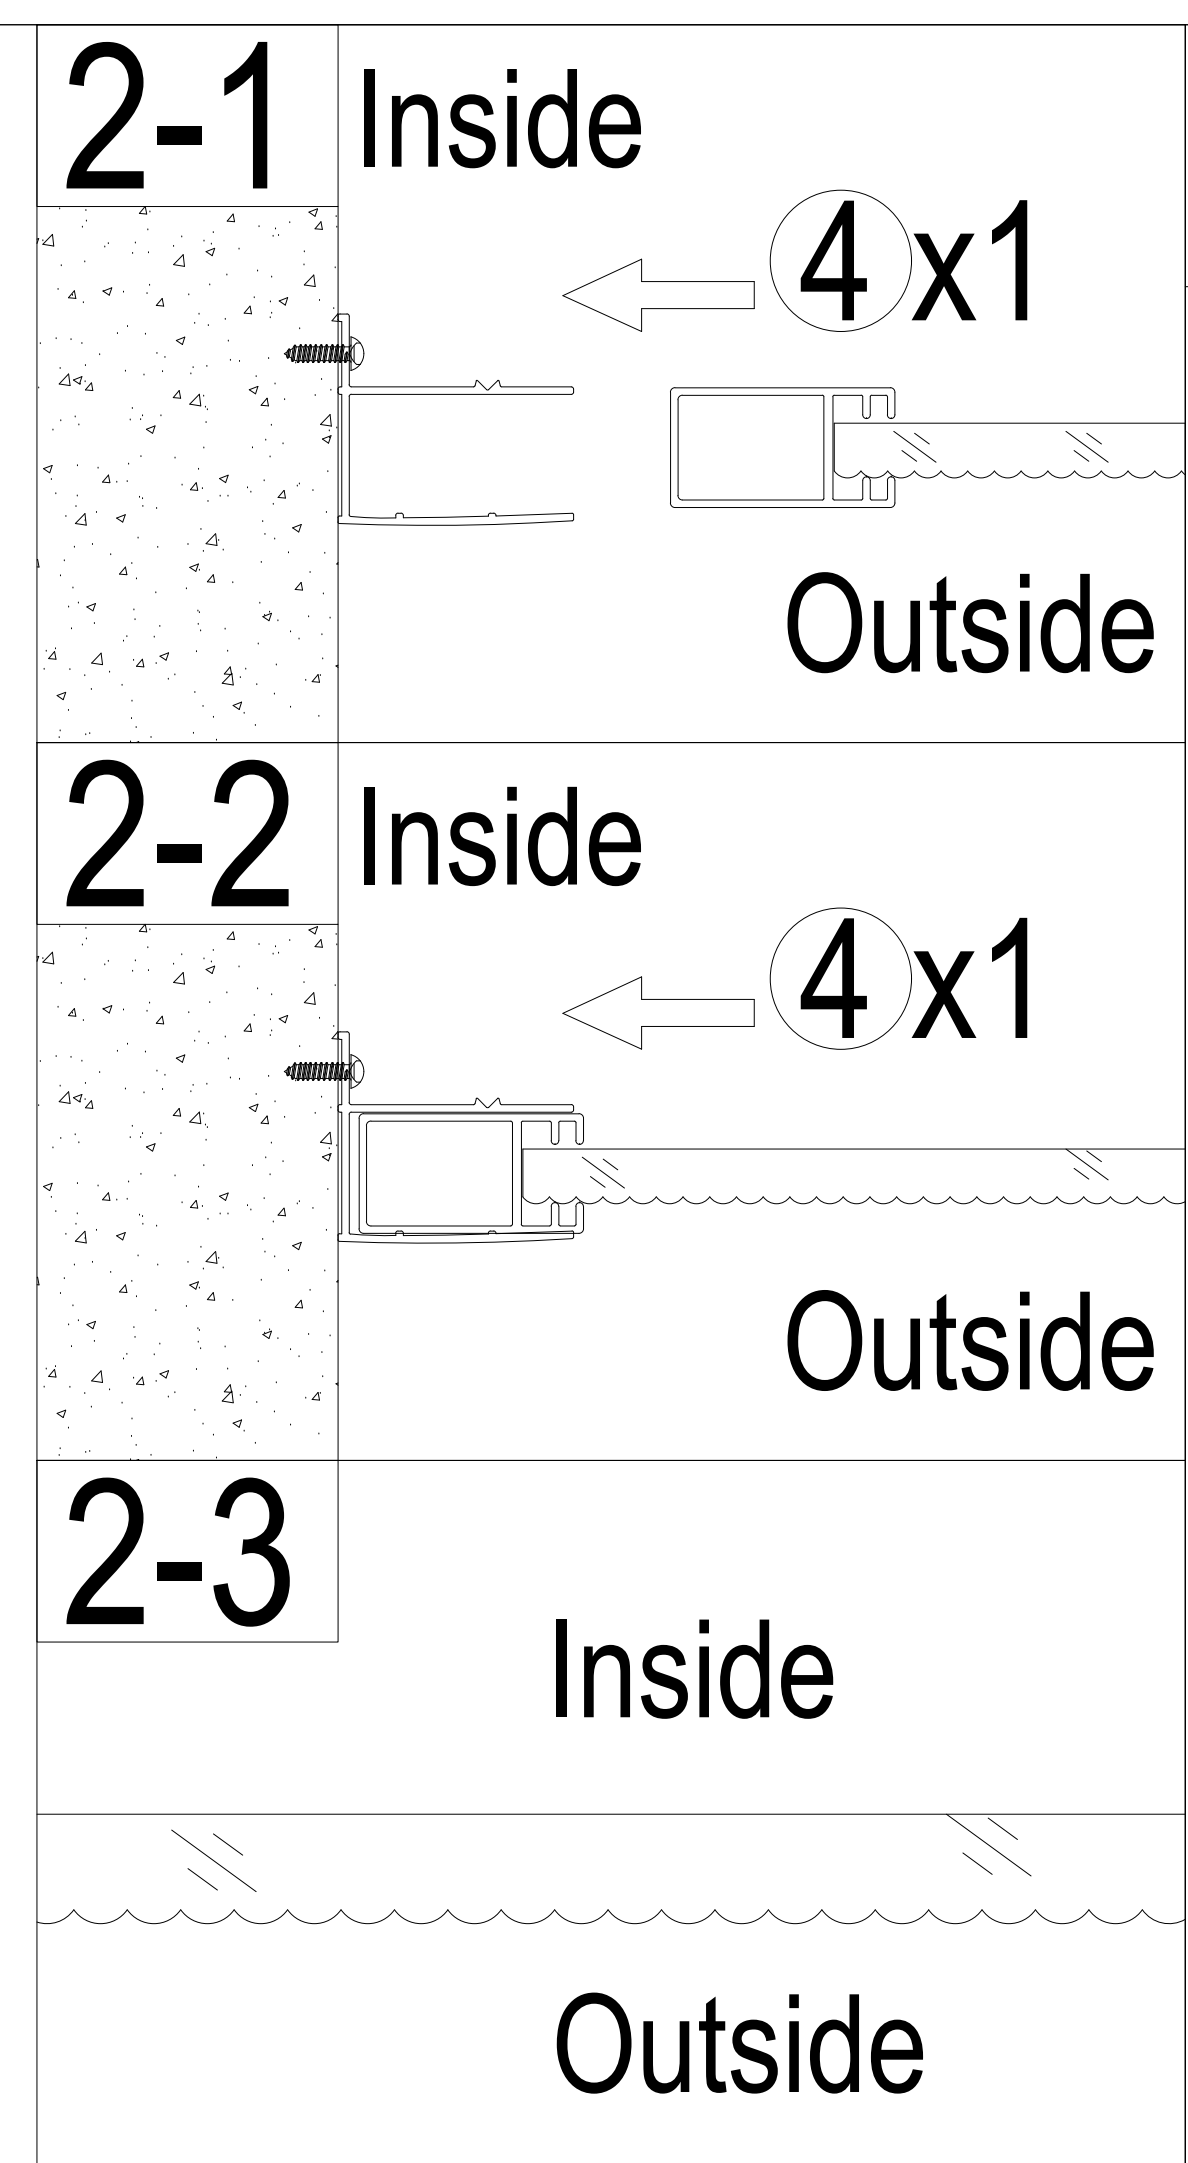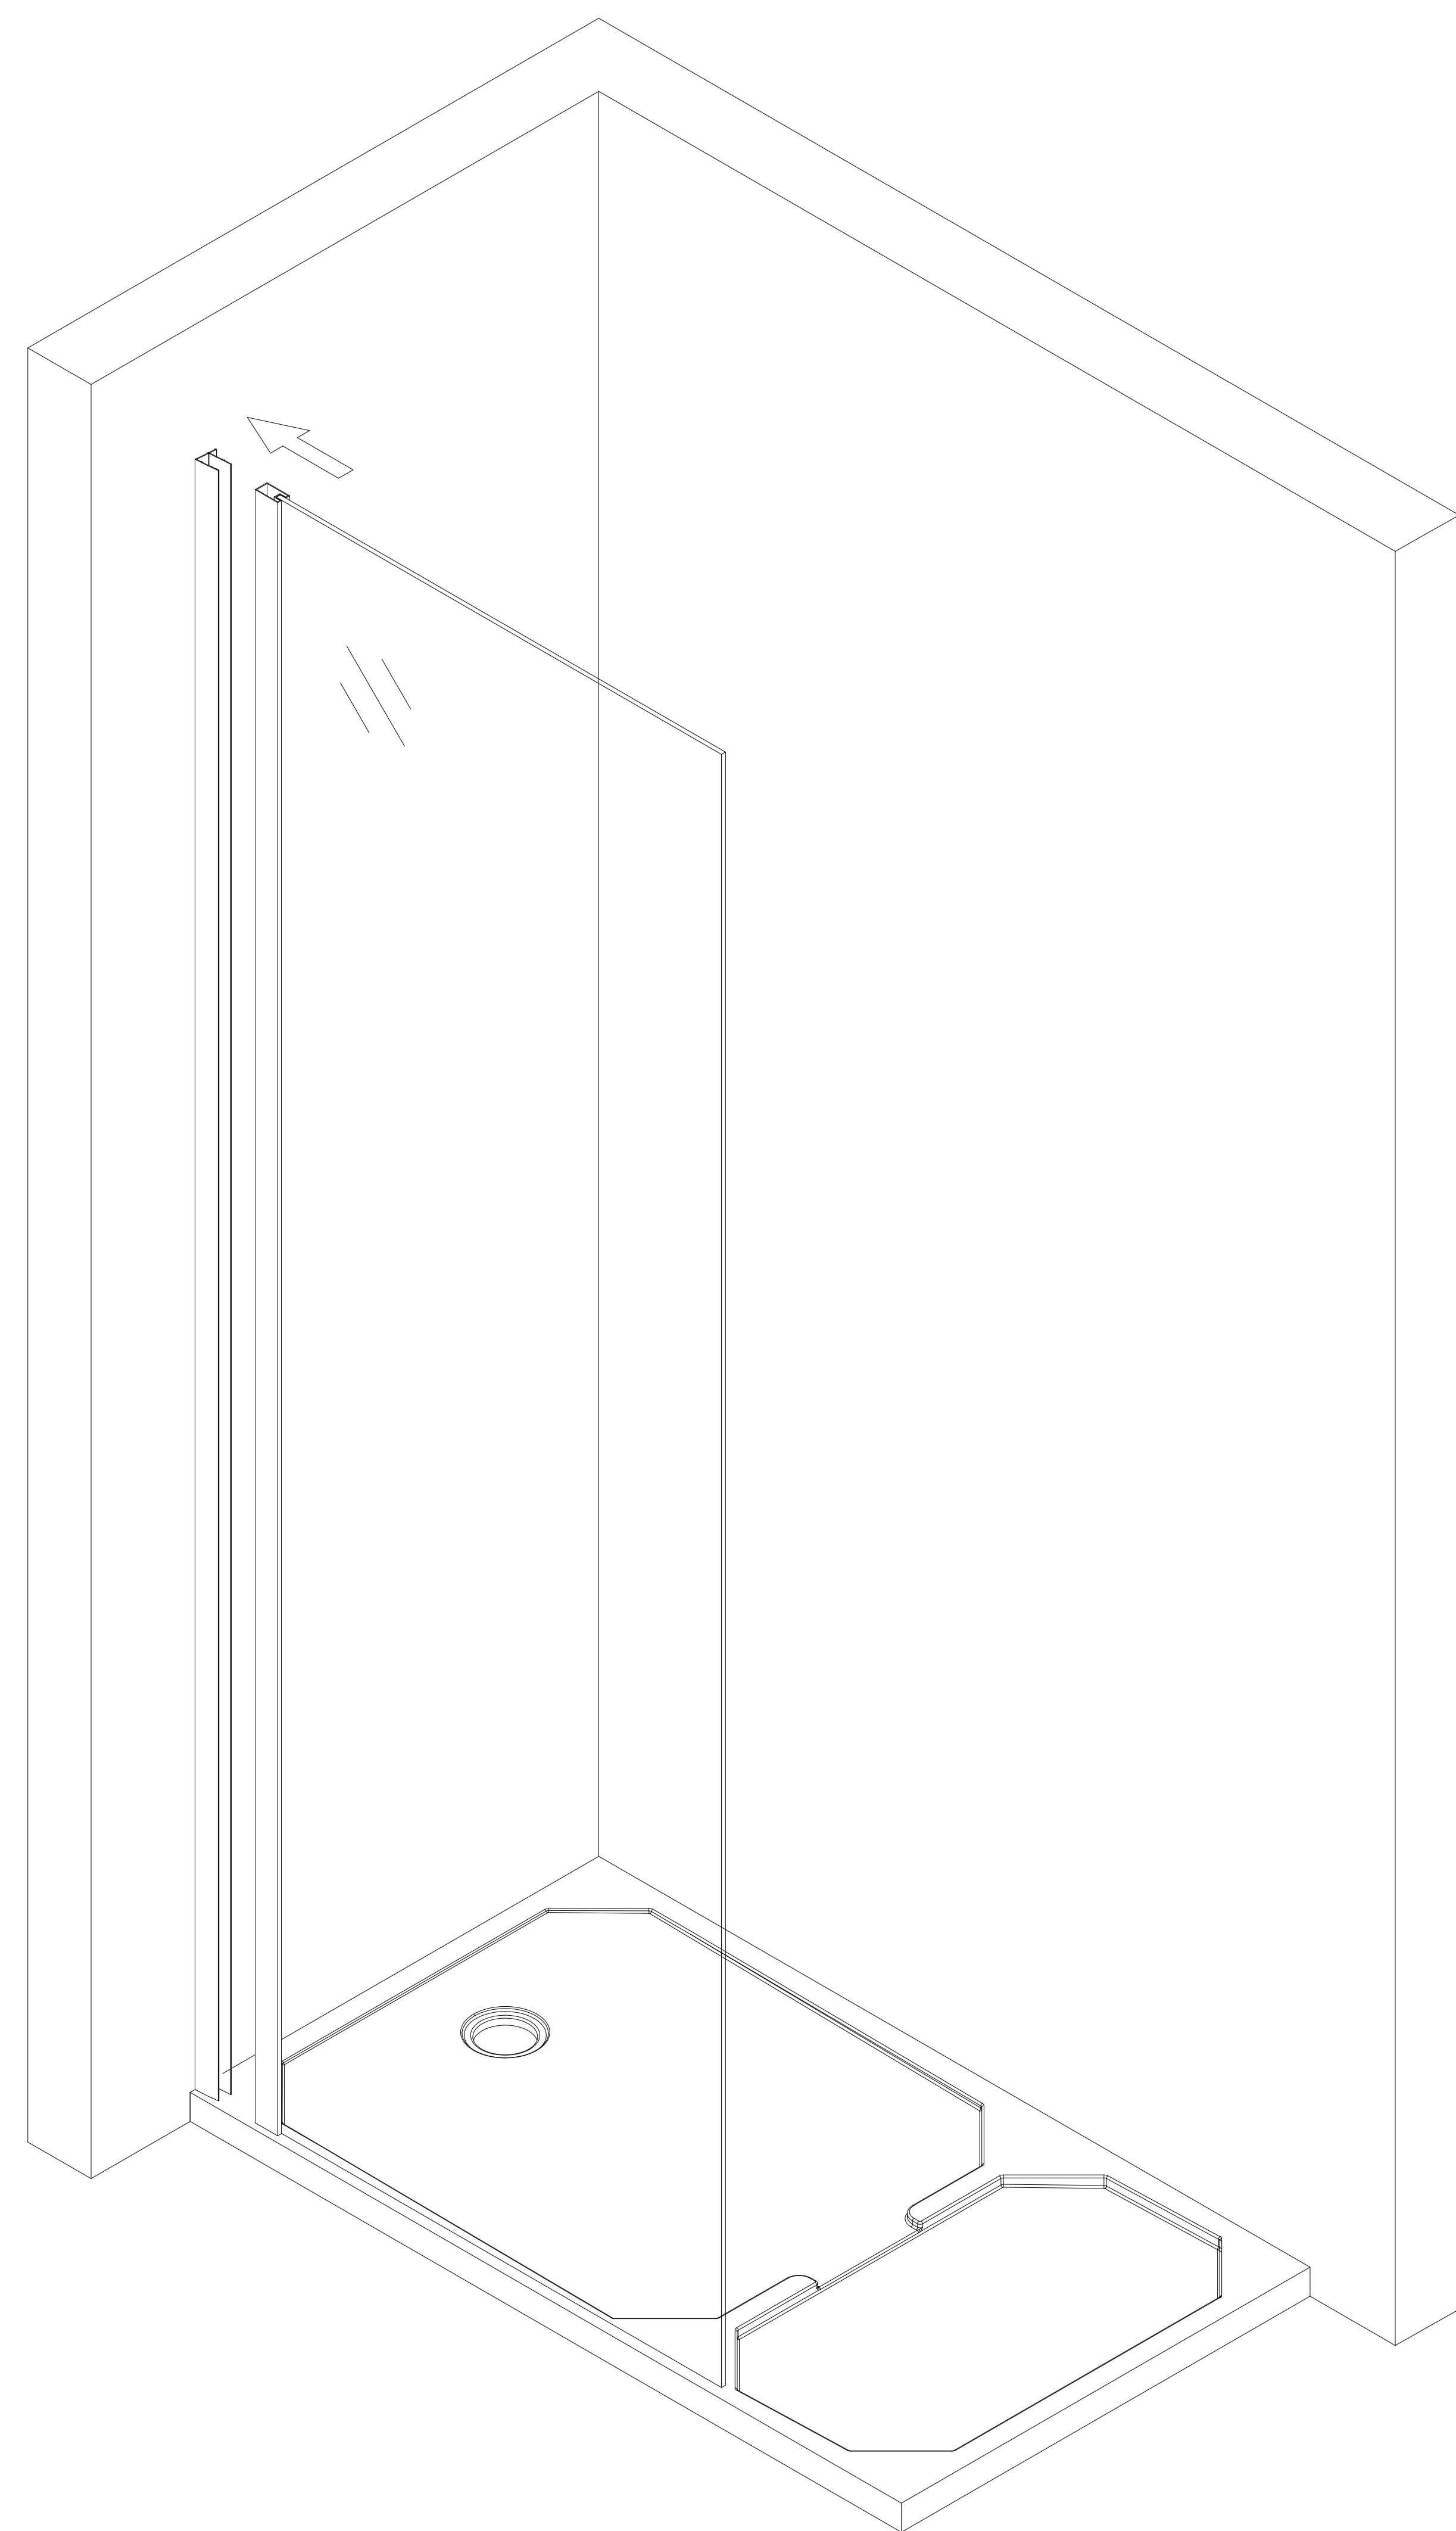




2R

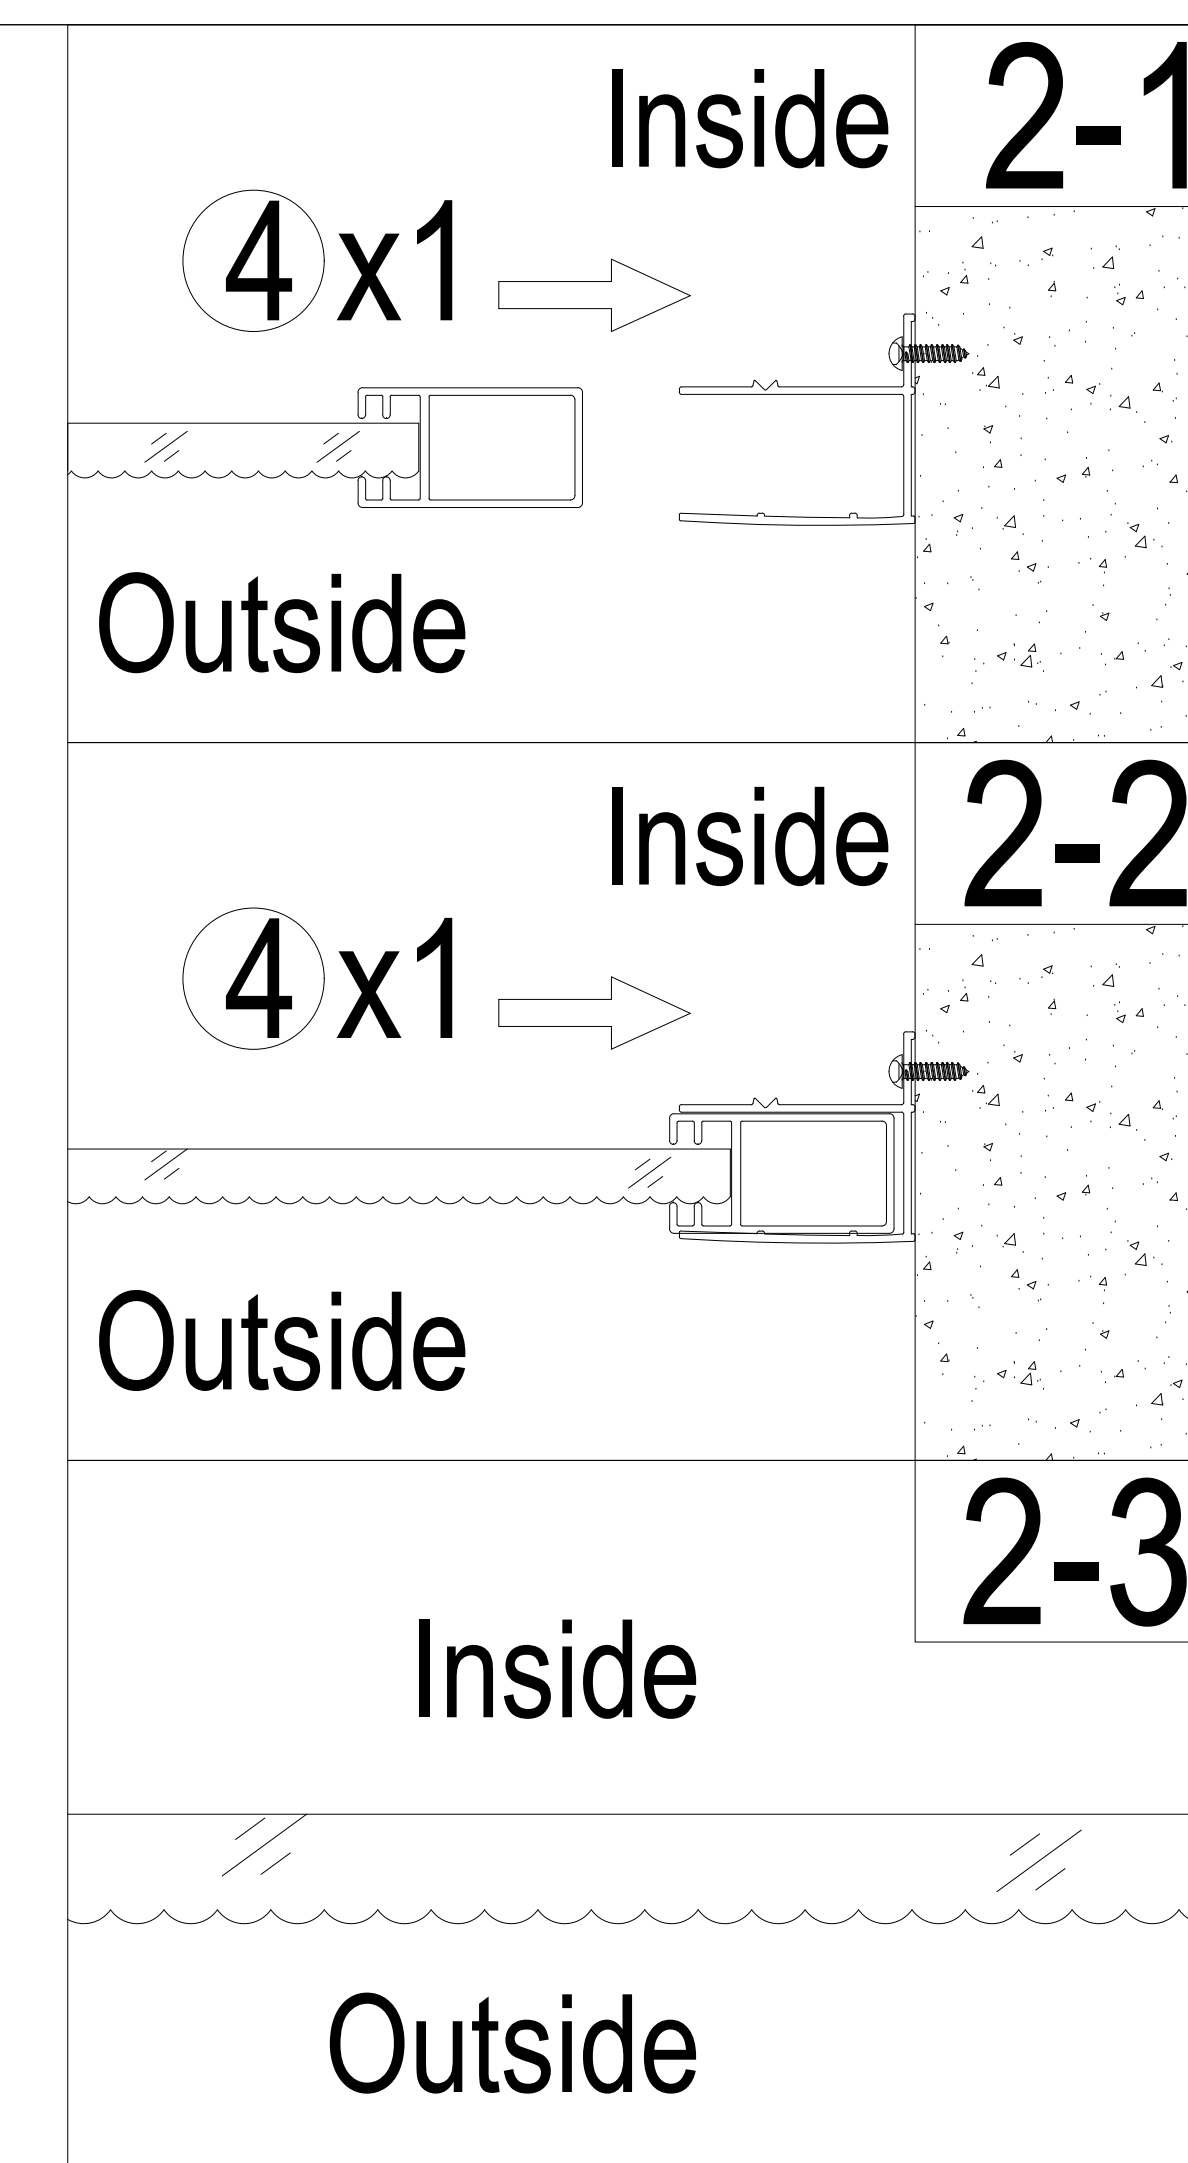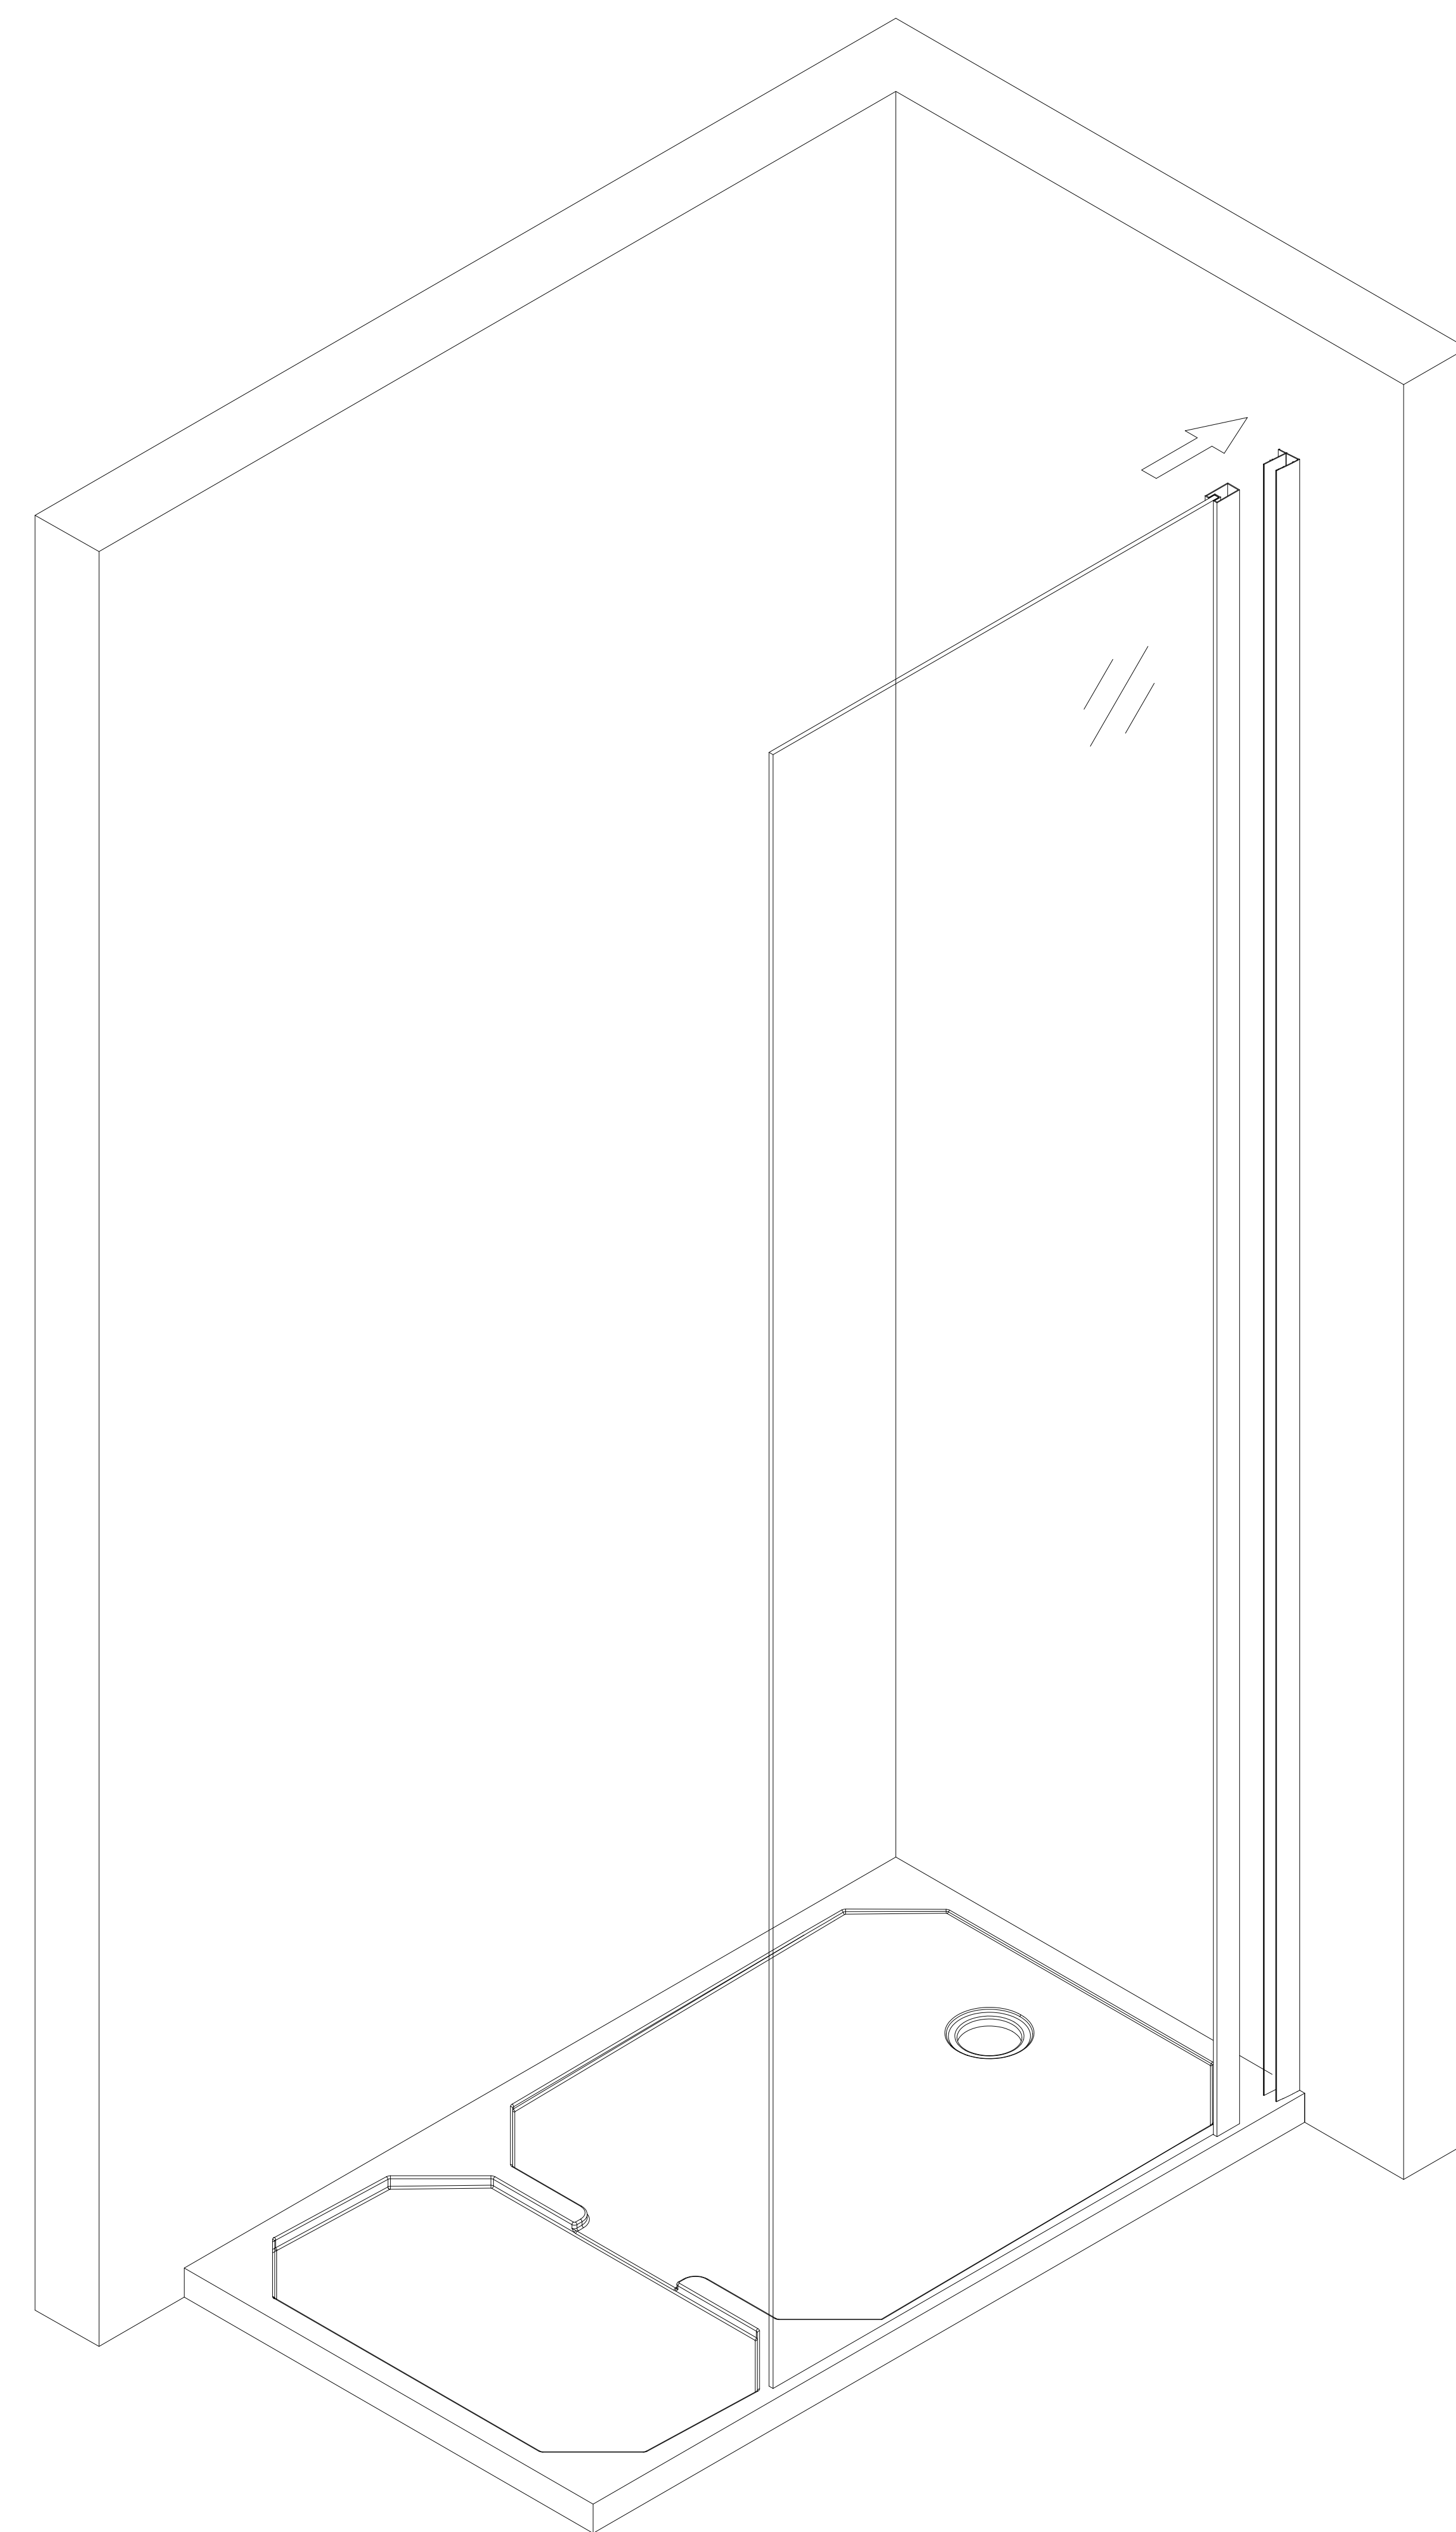

3L




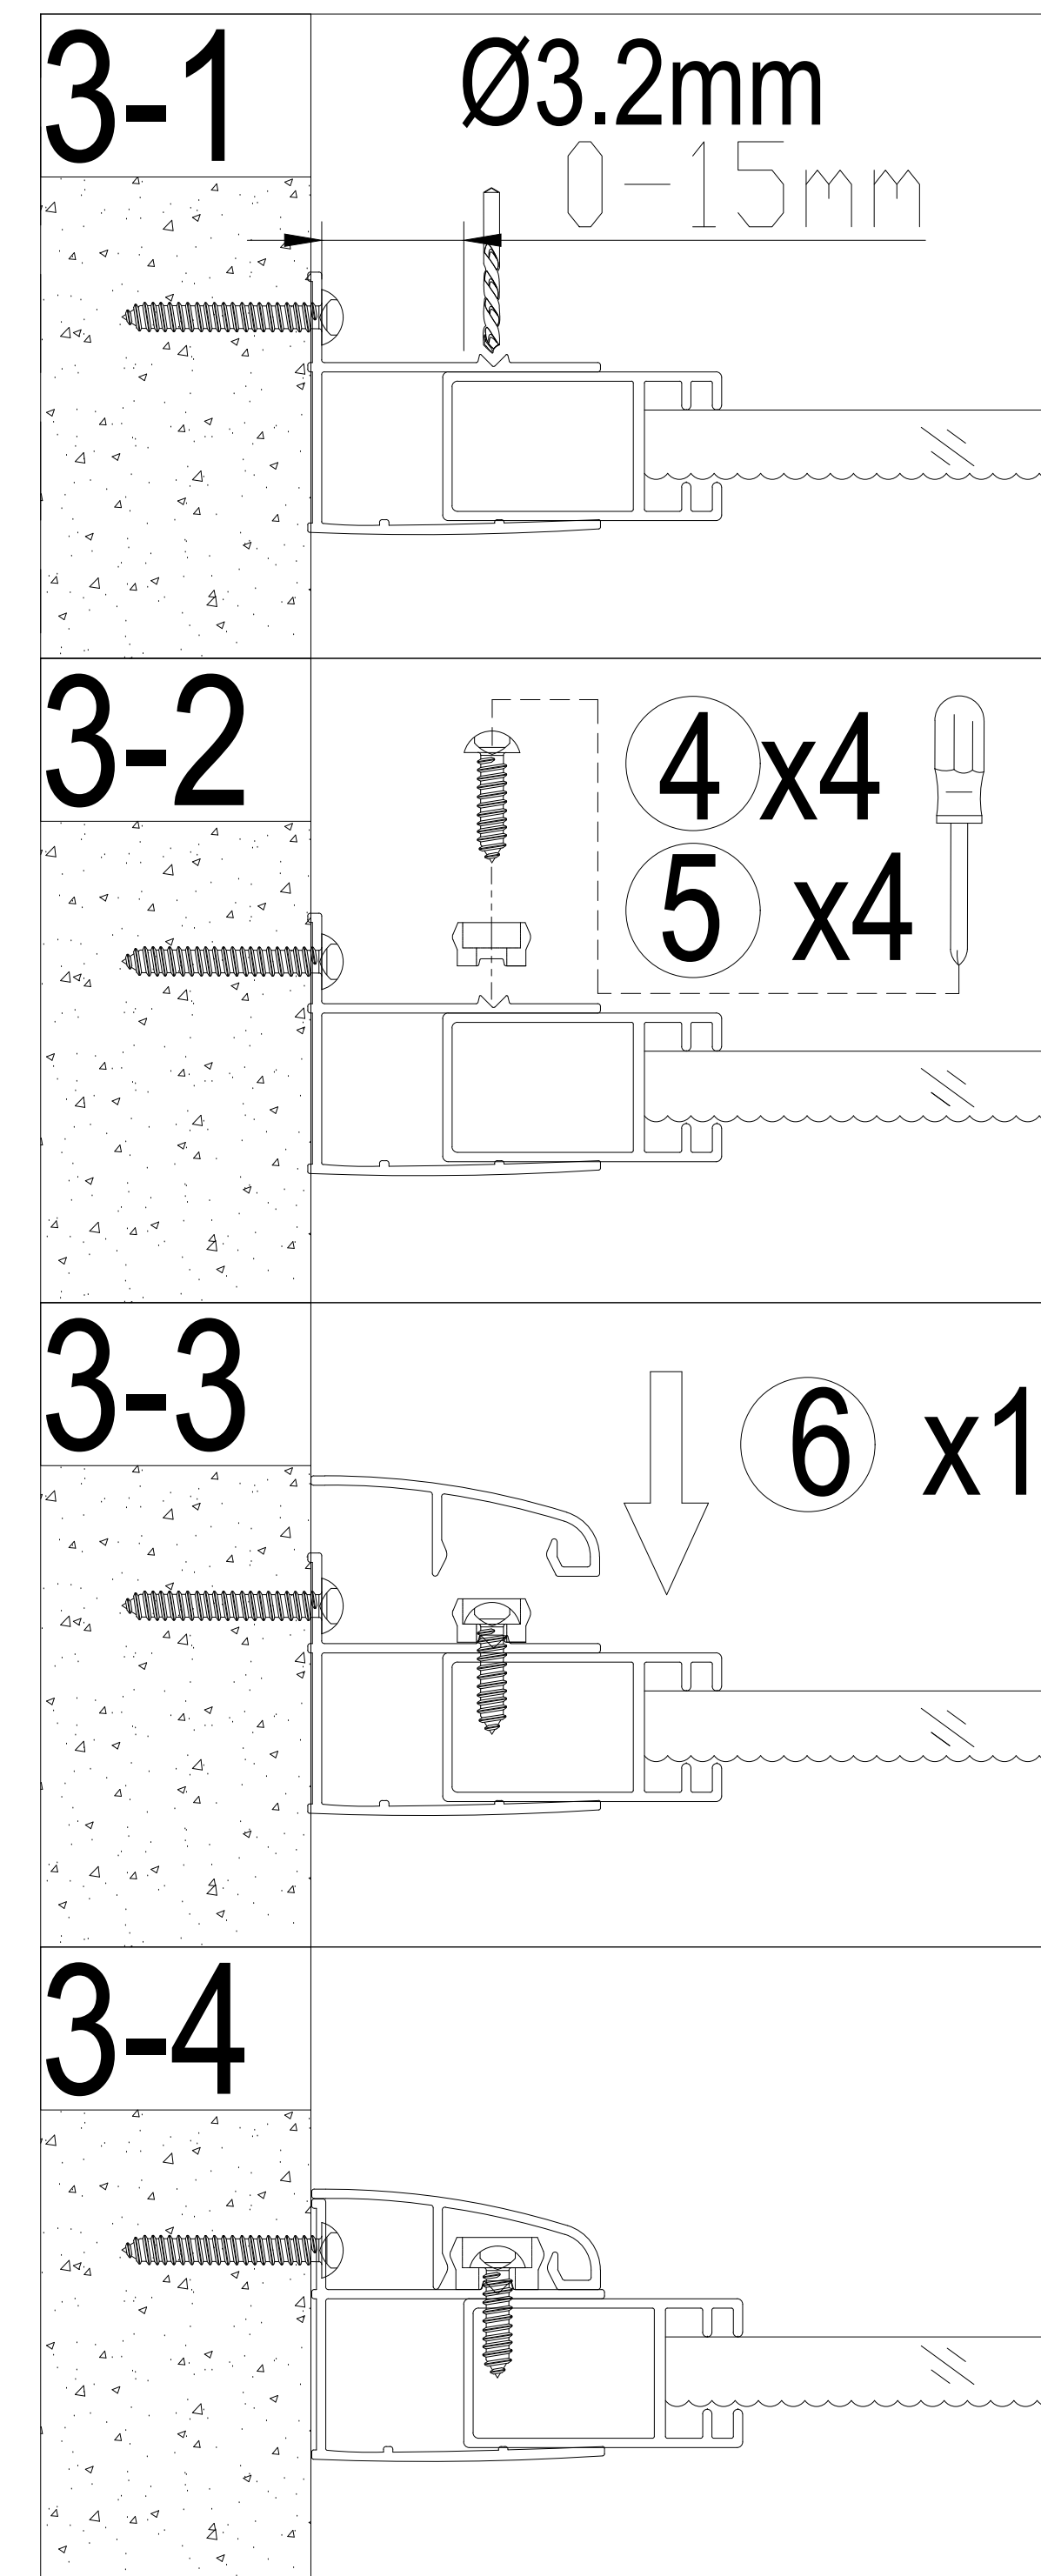
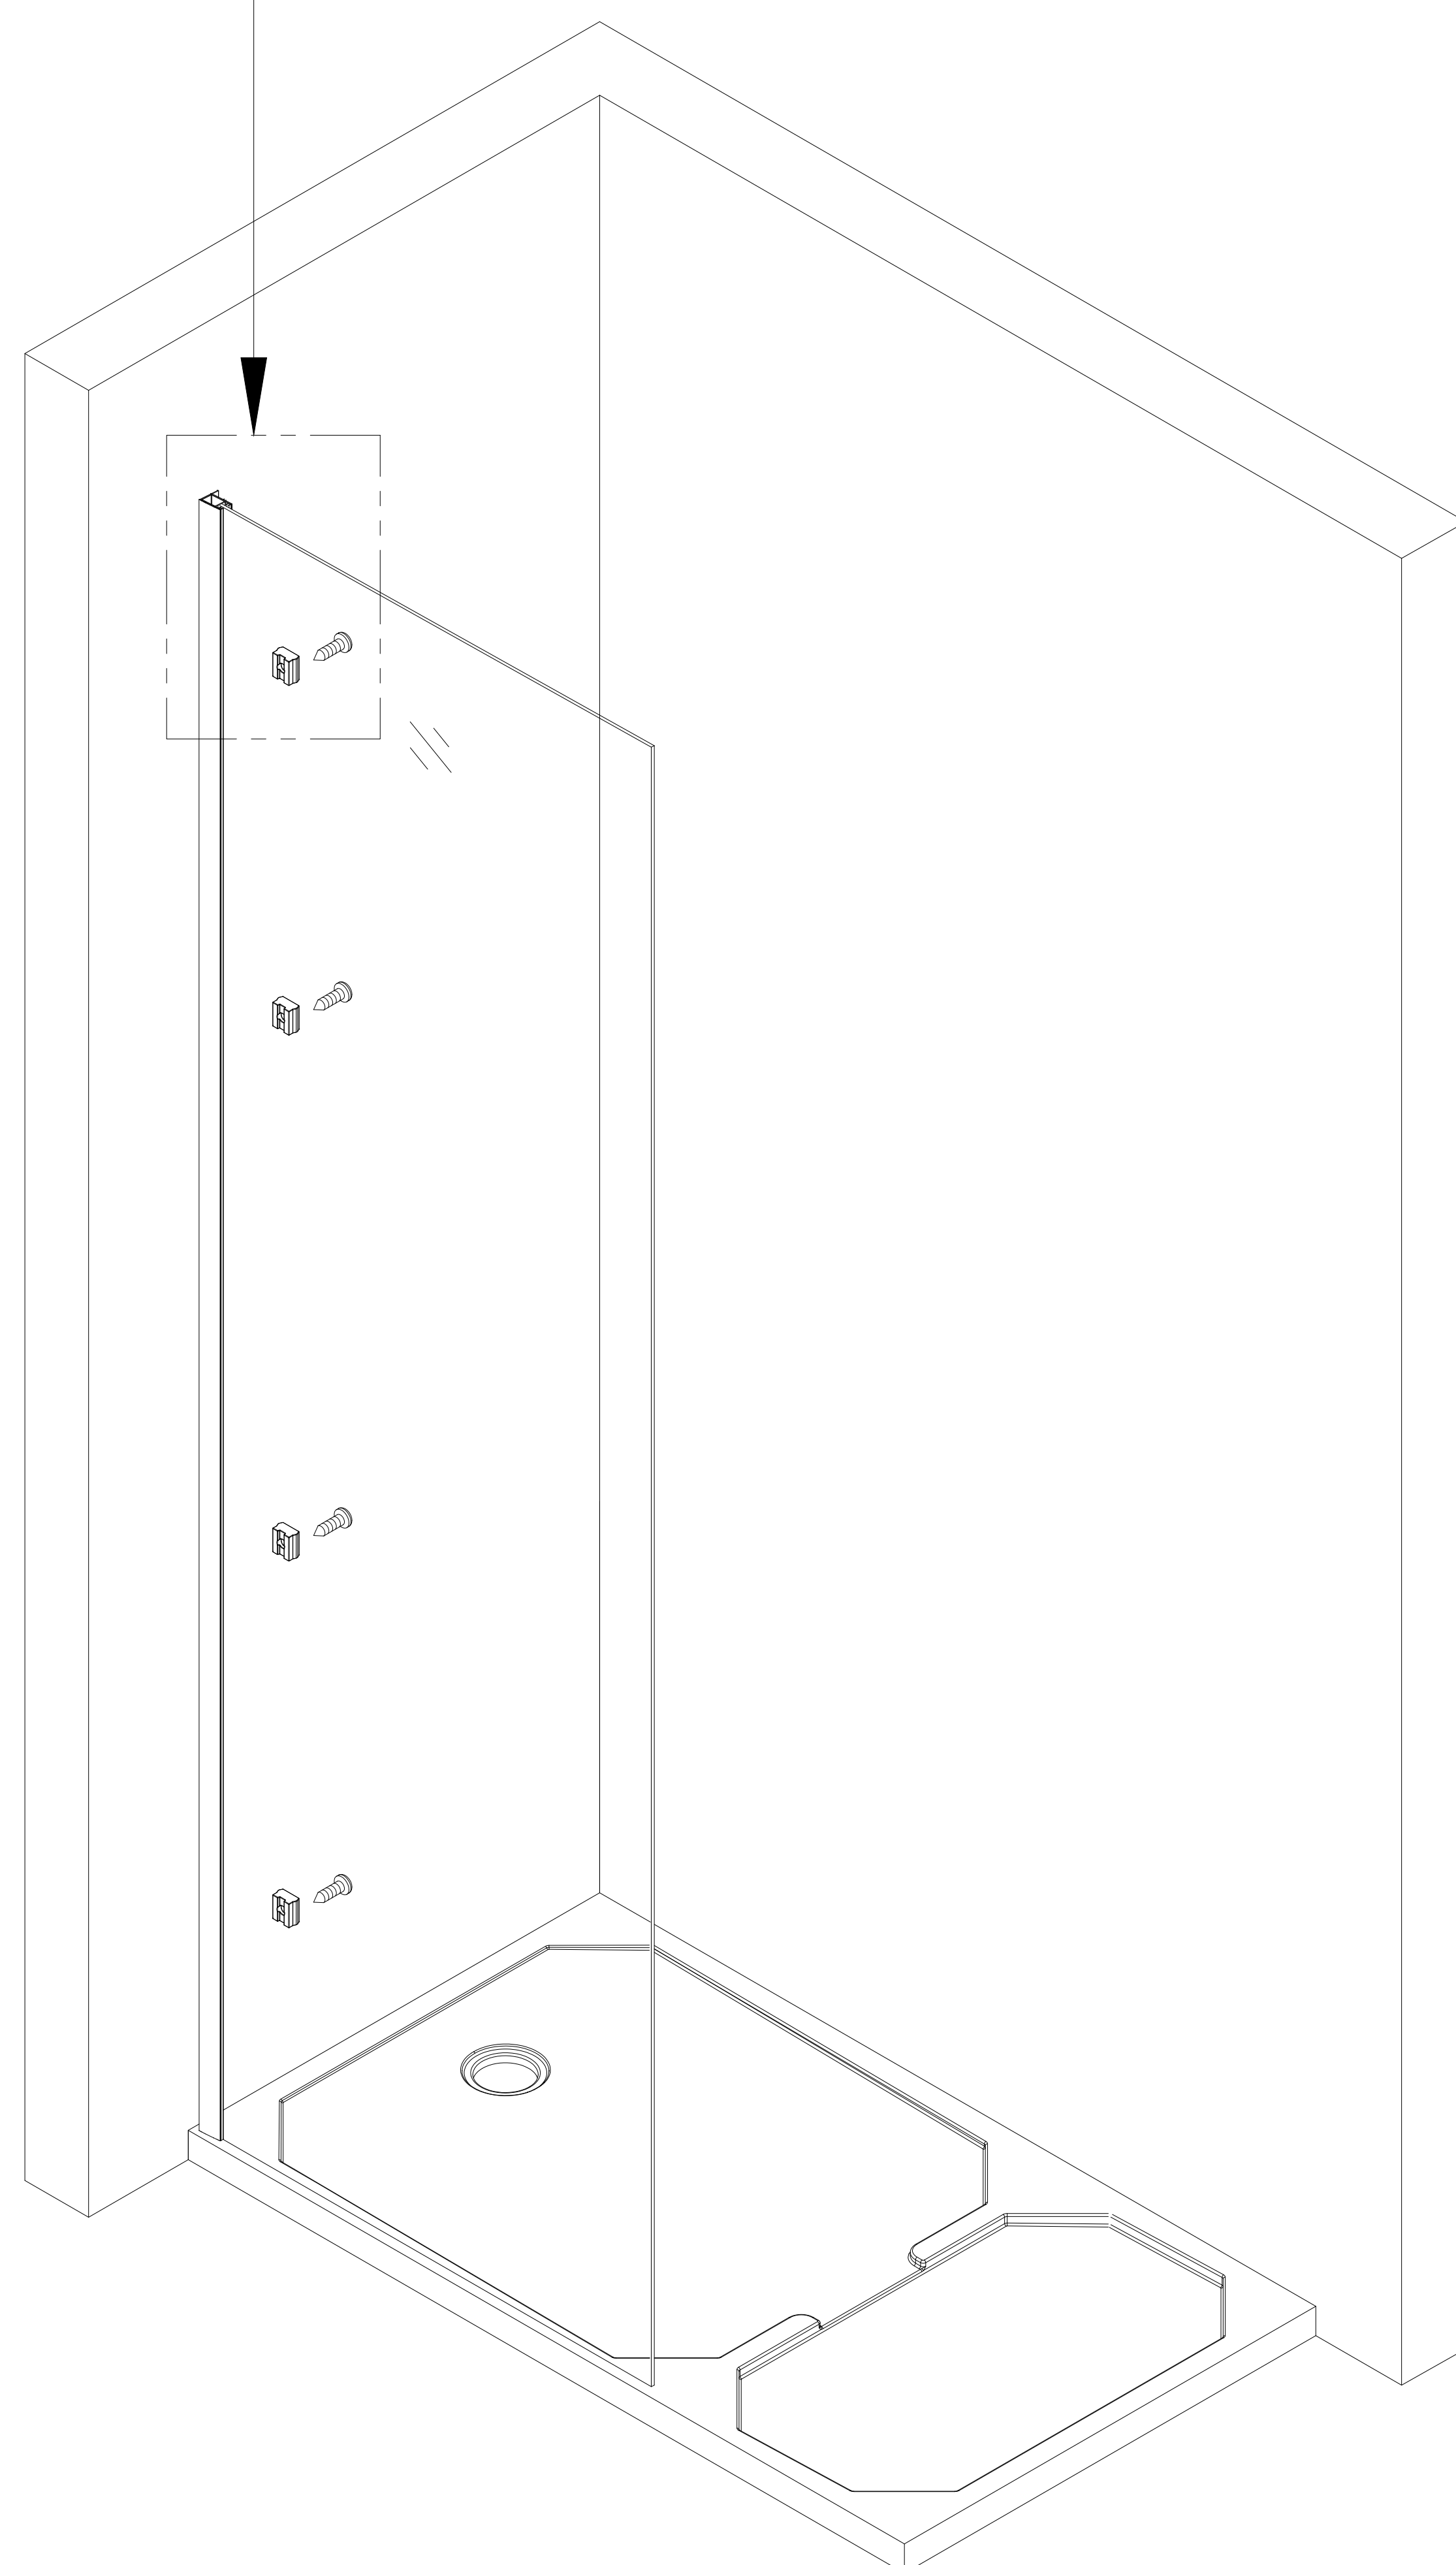
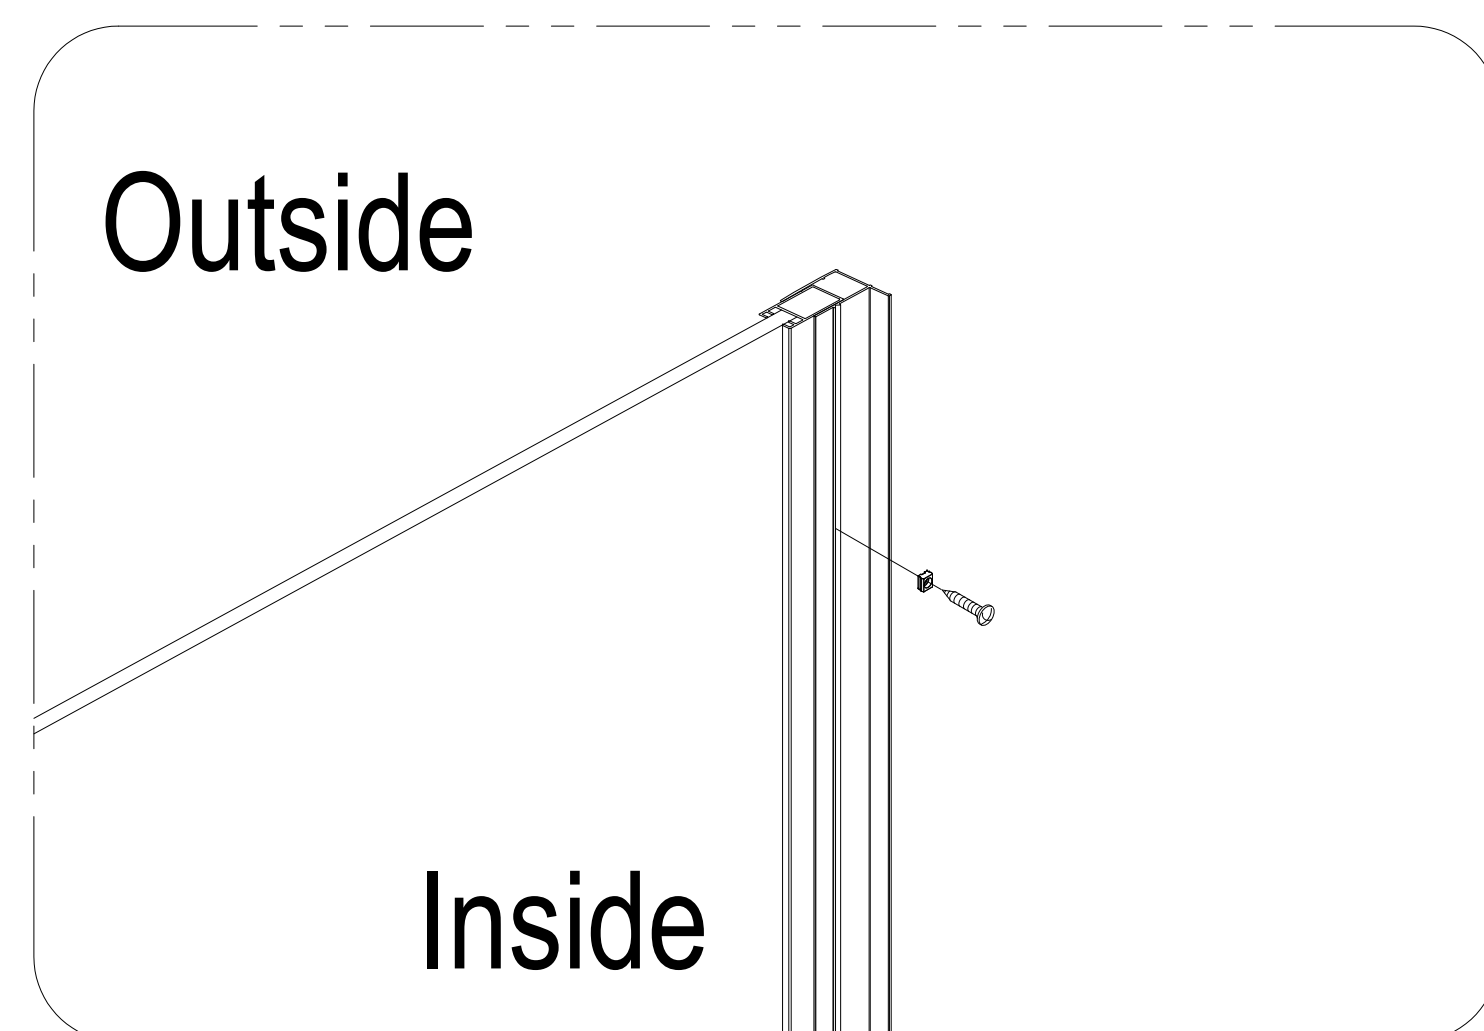


3R

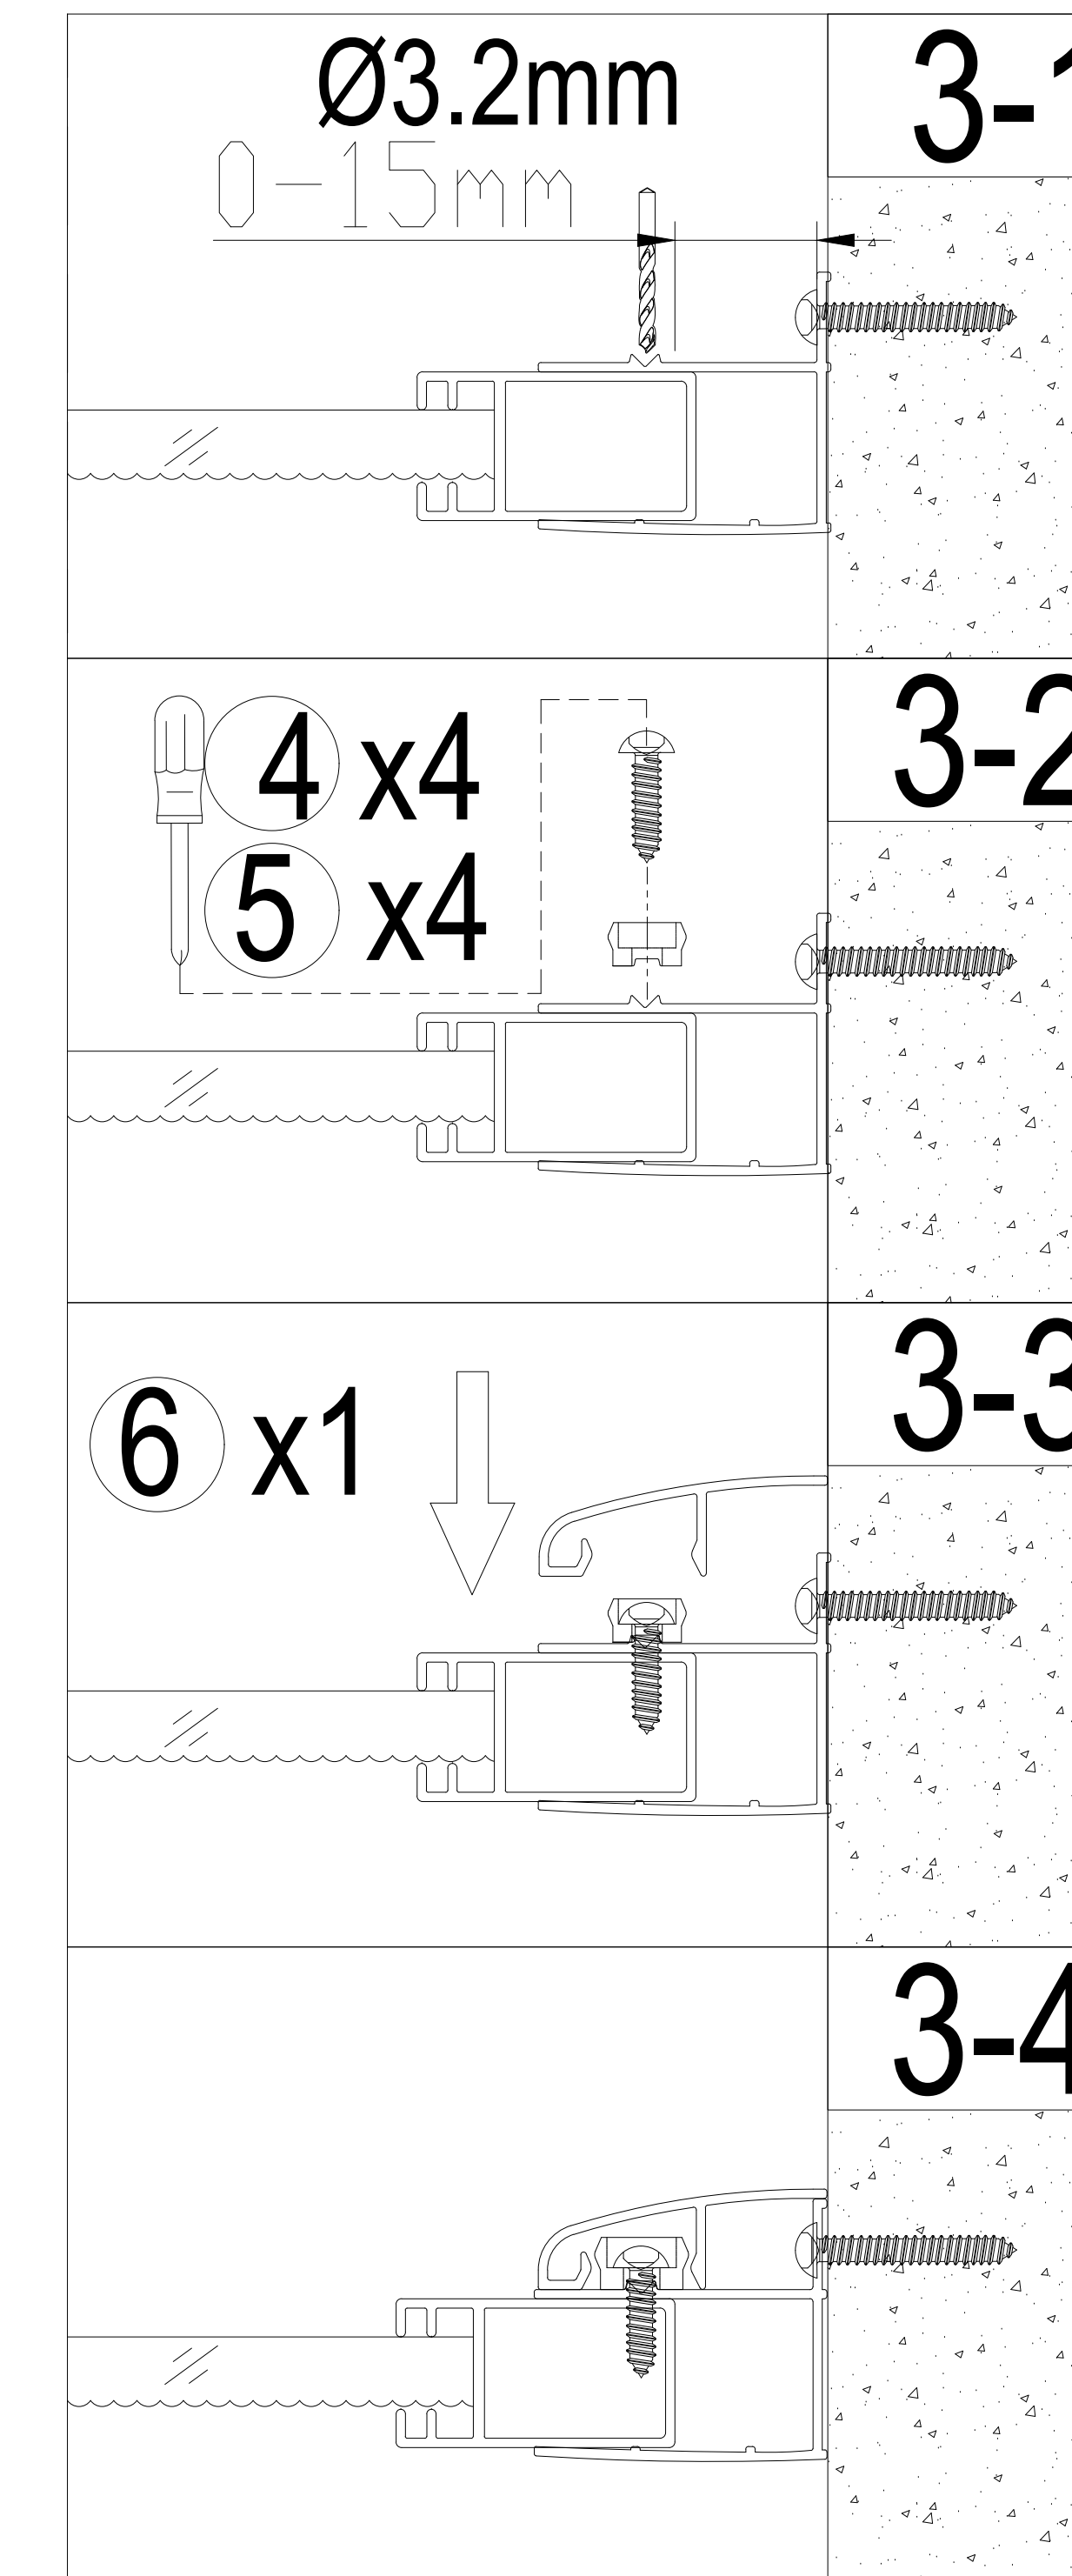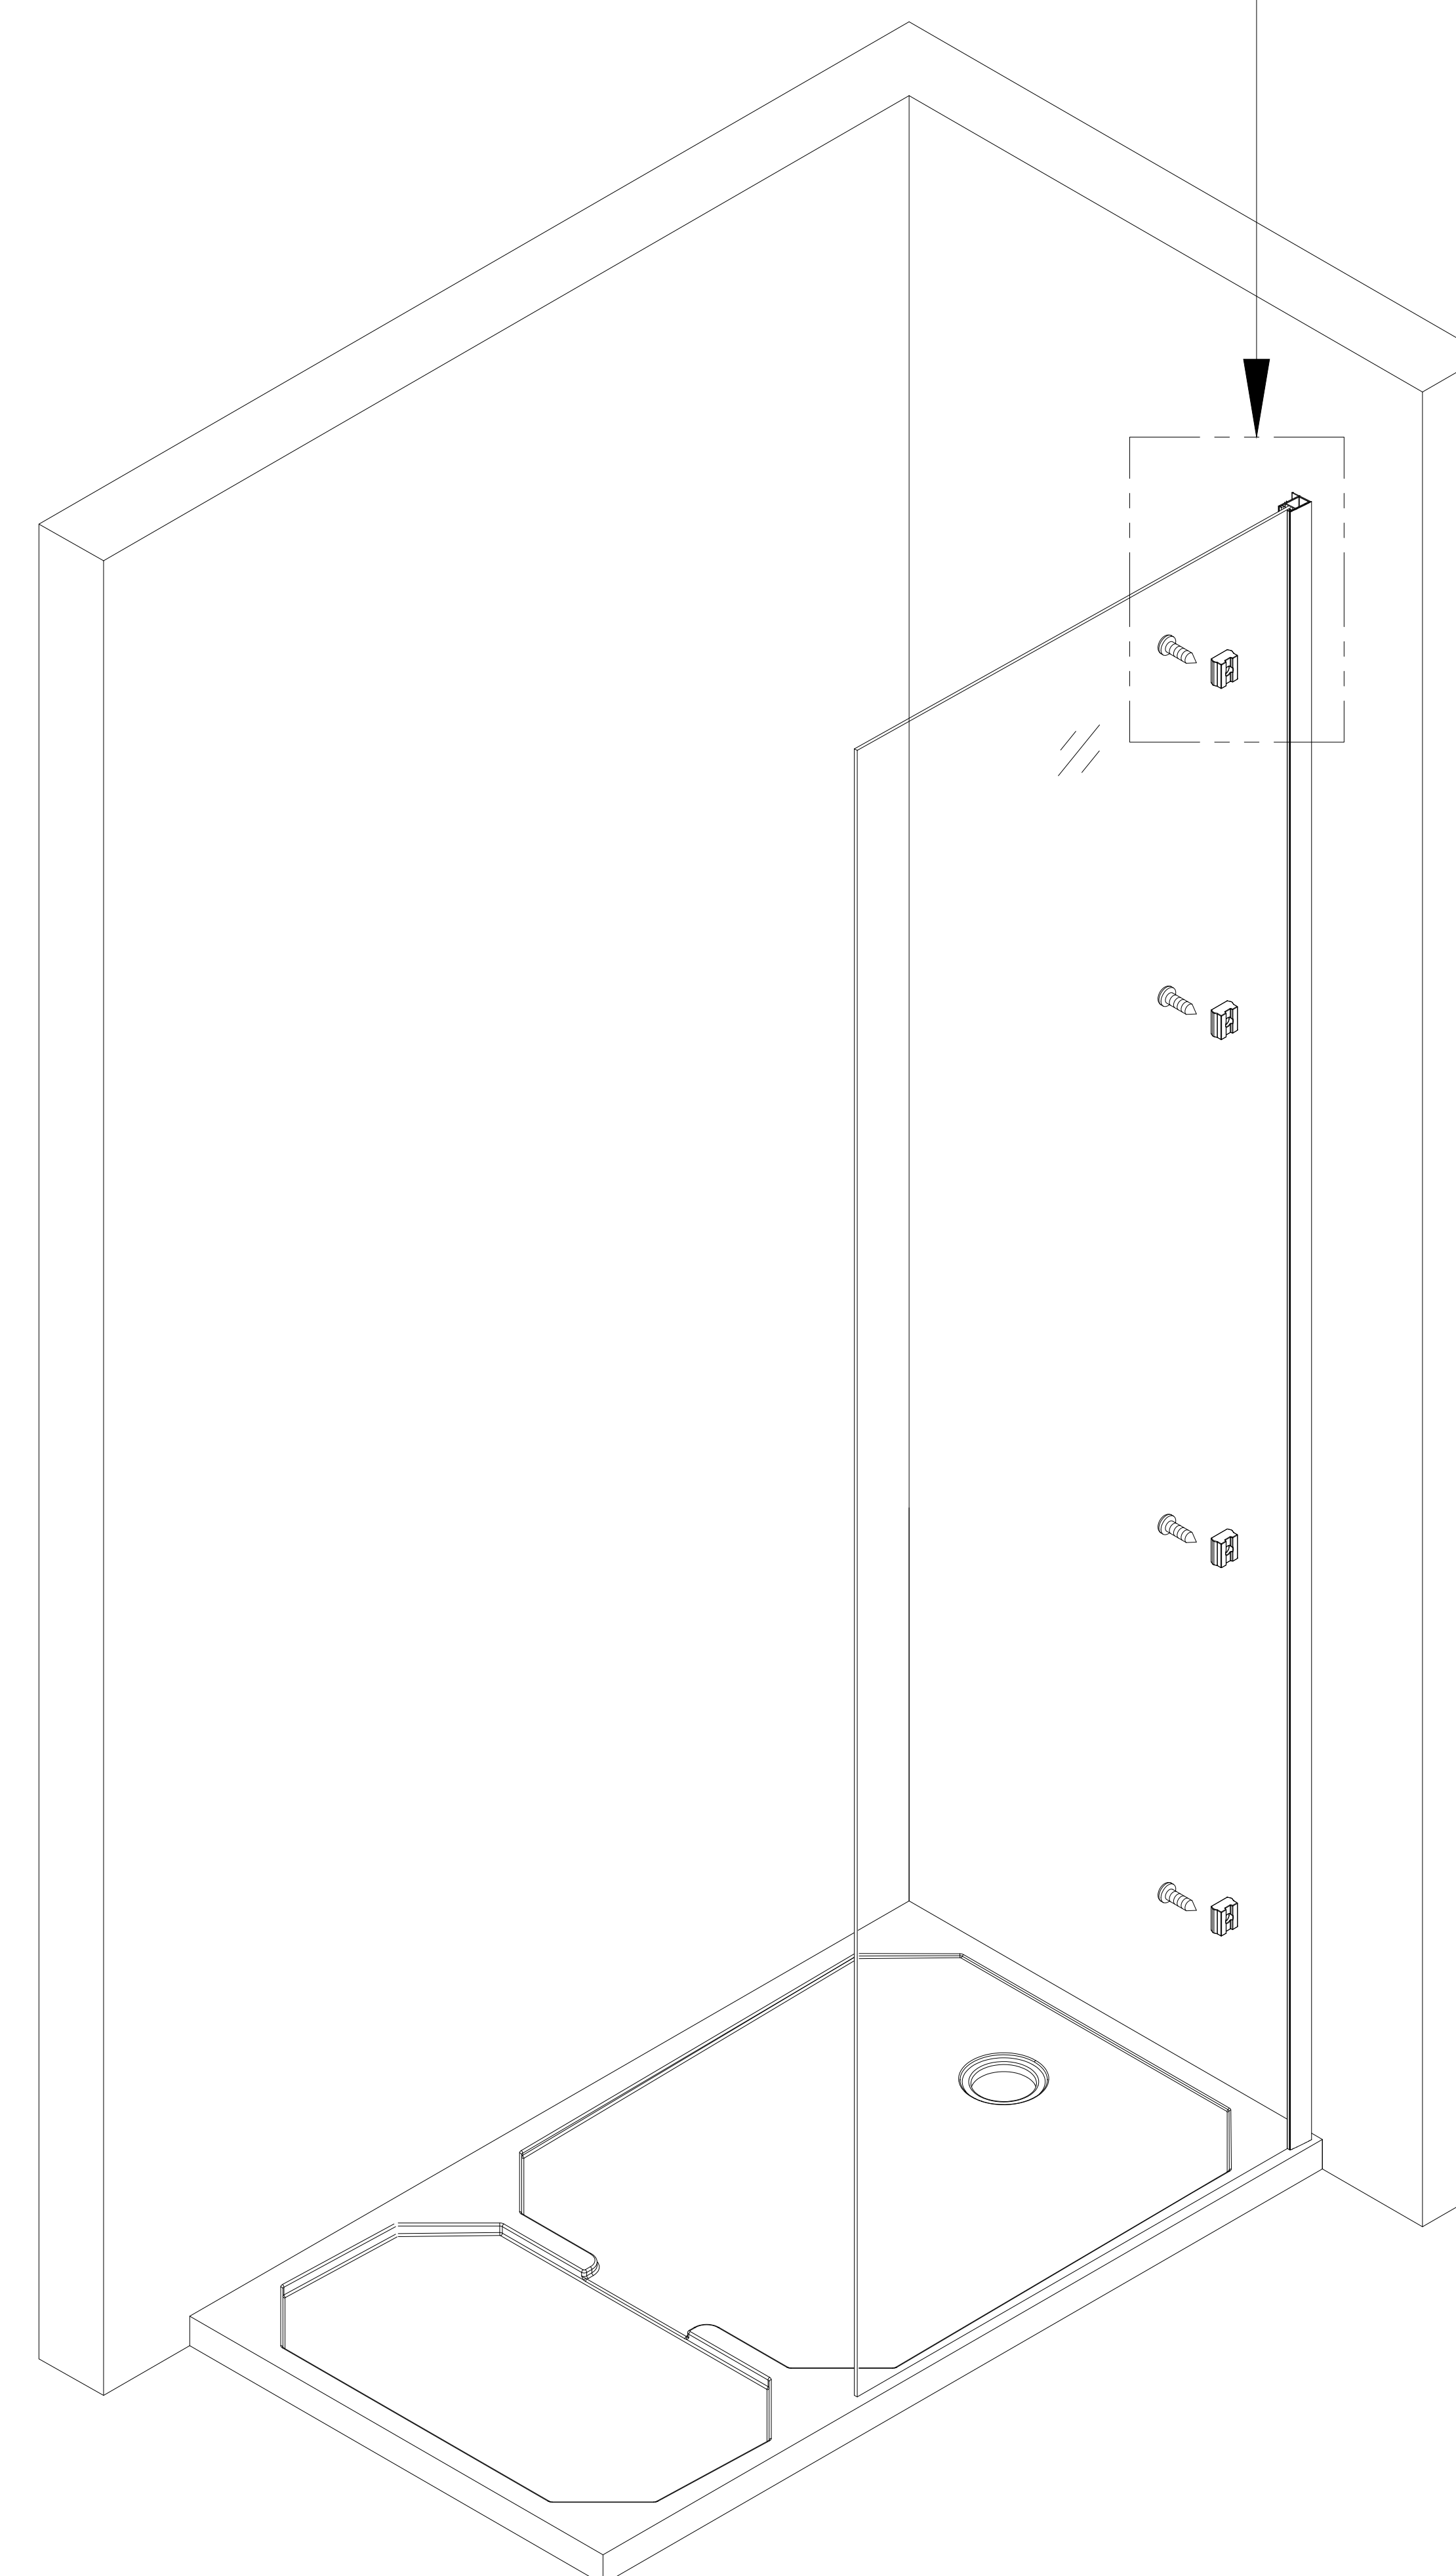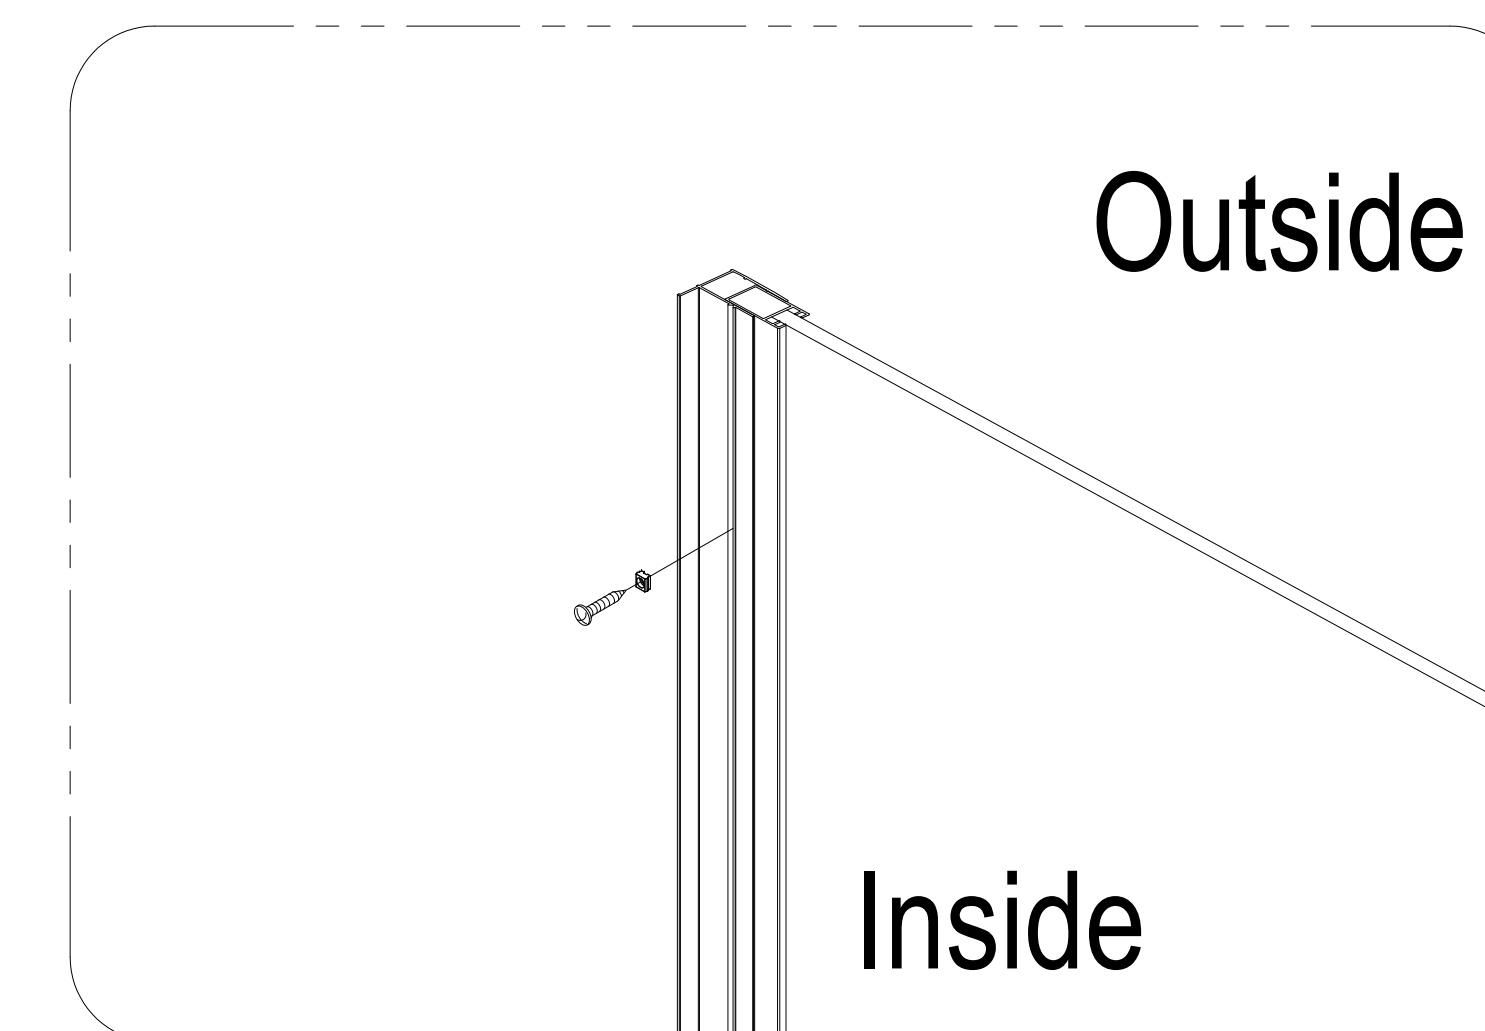


4L


4R

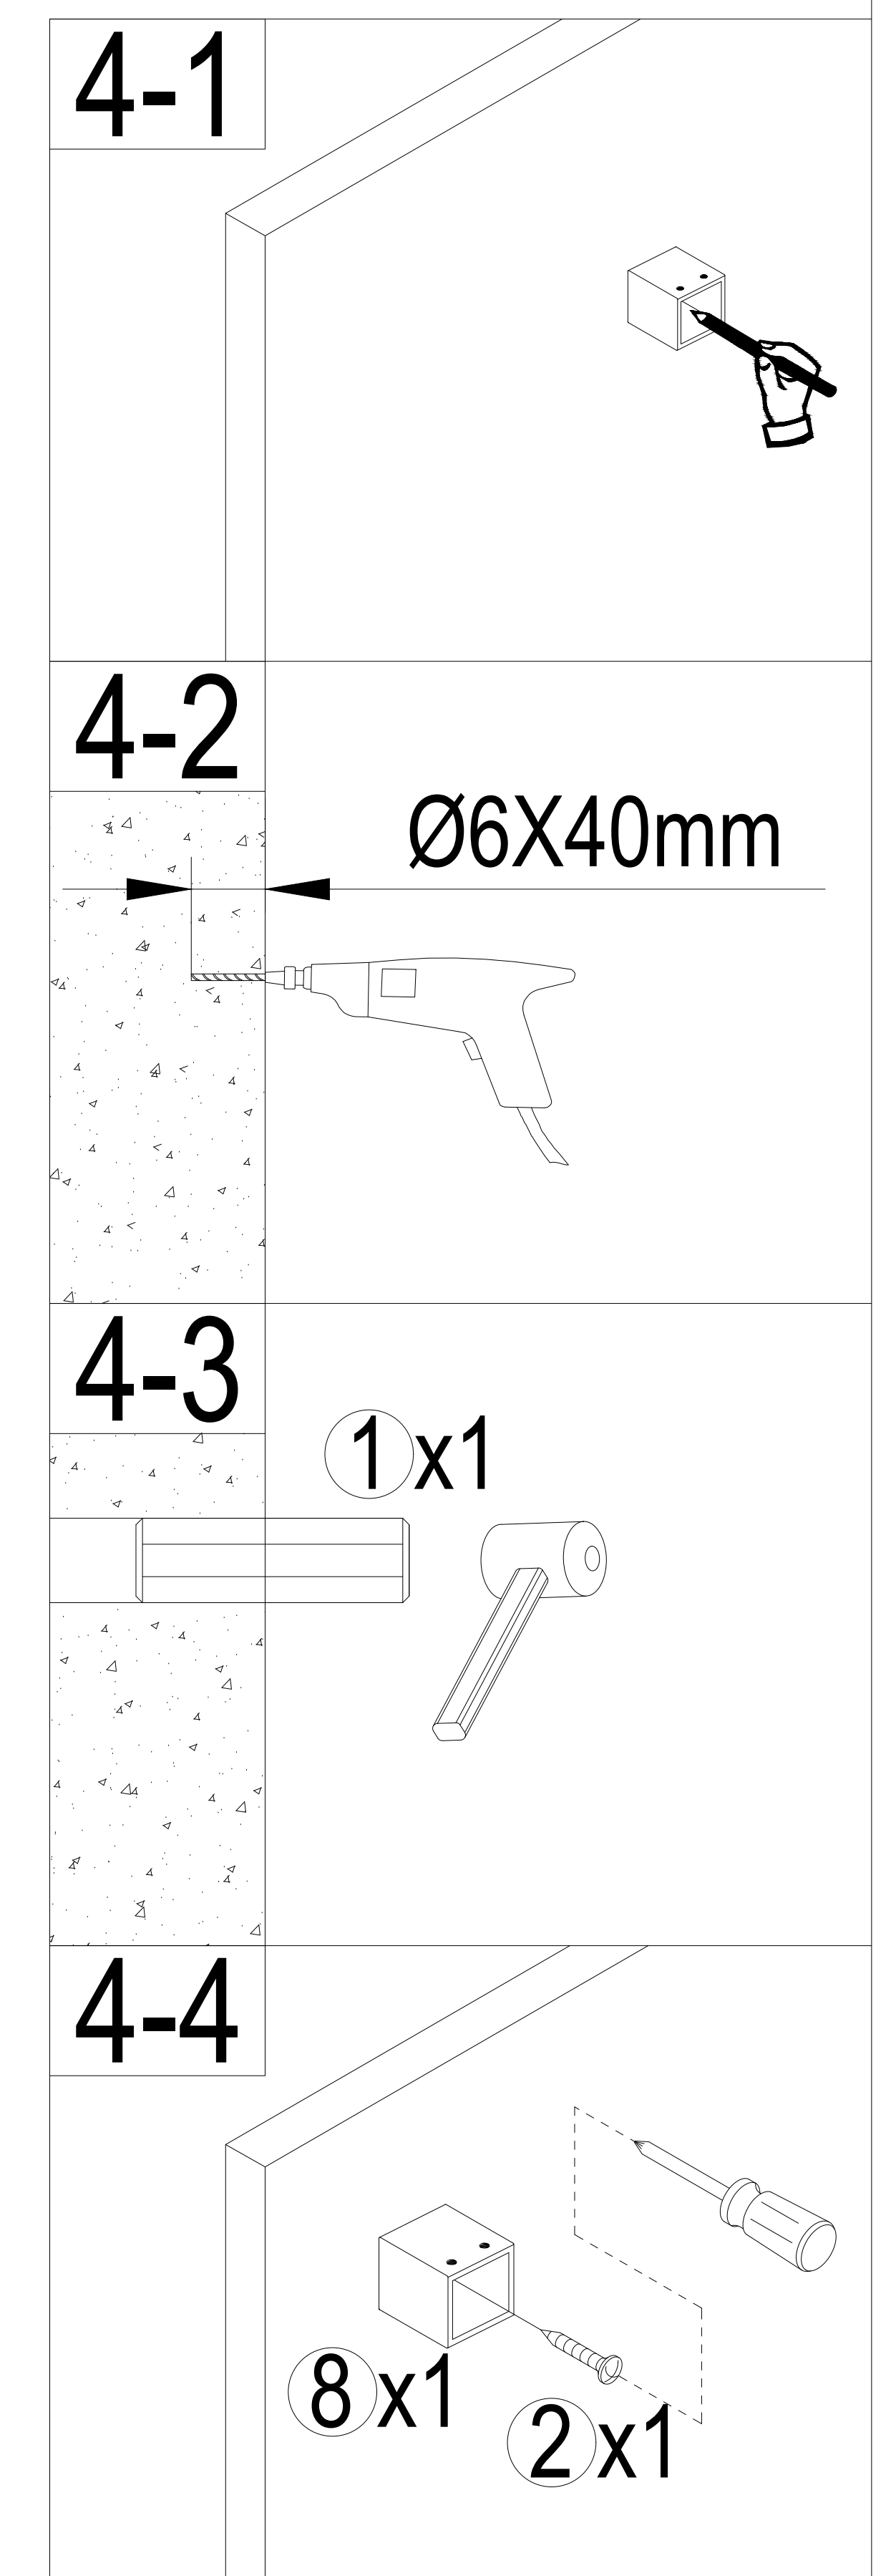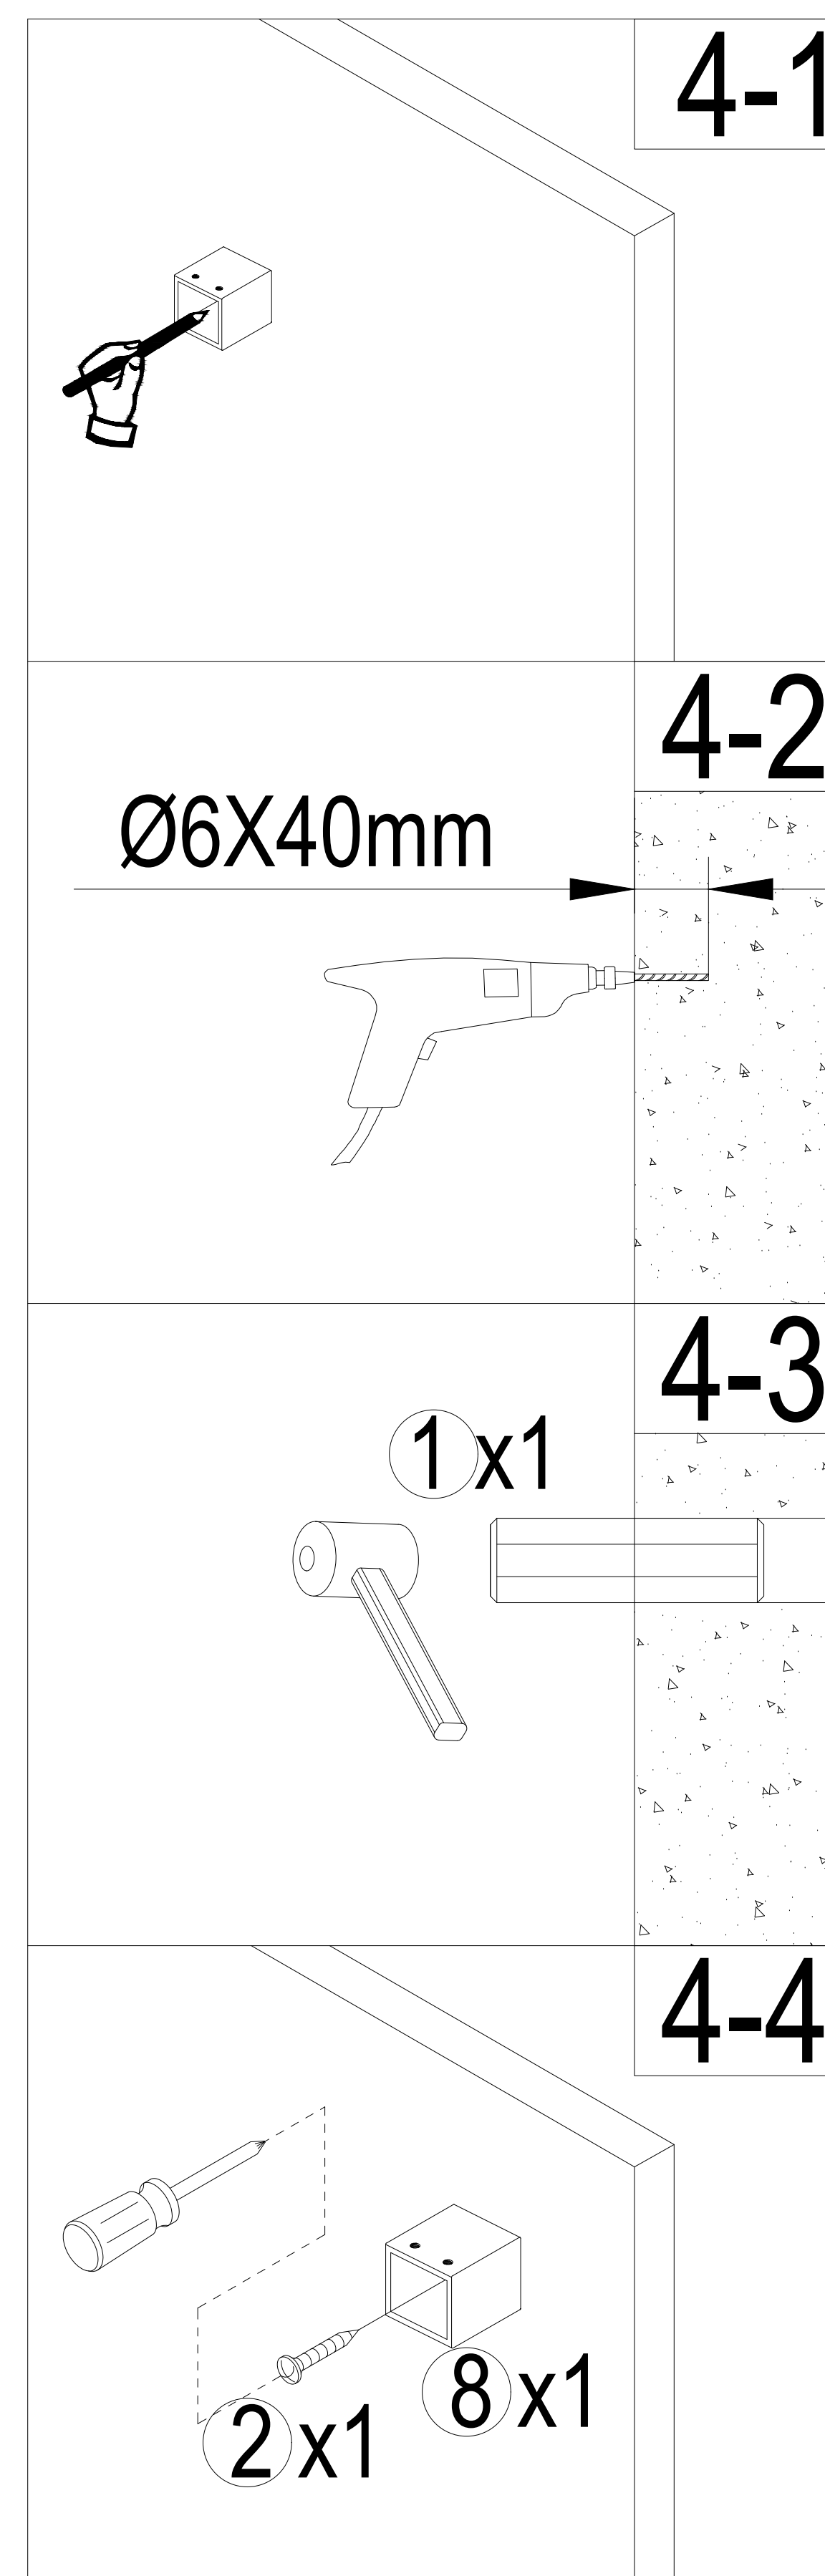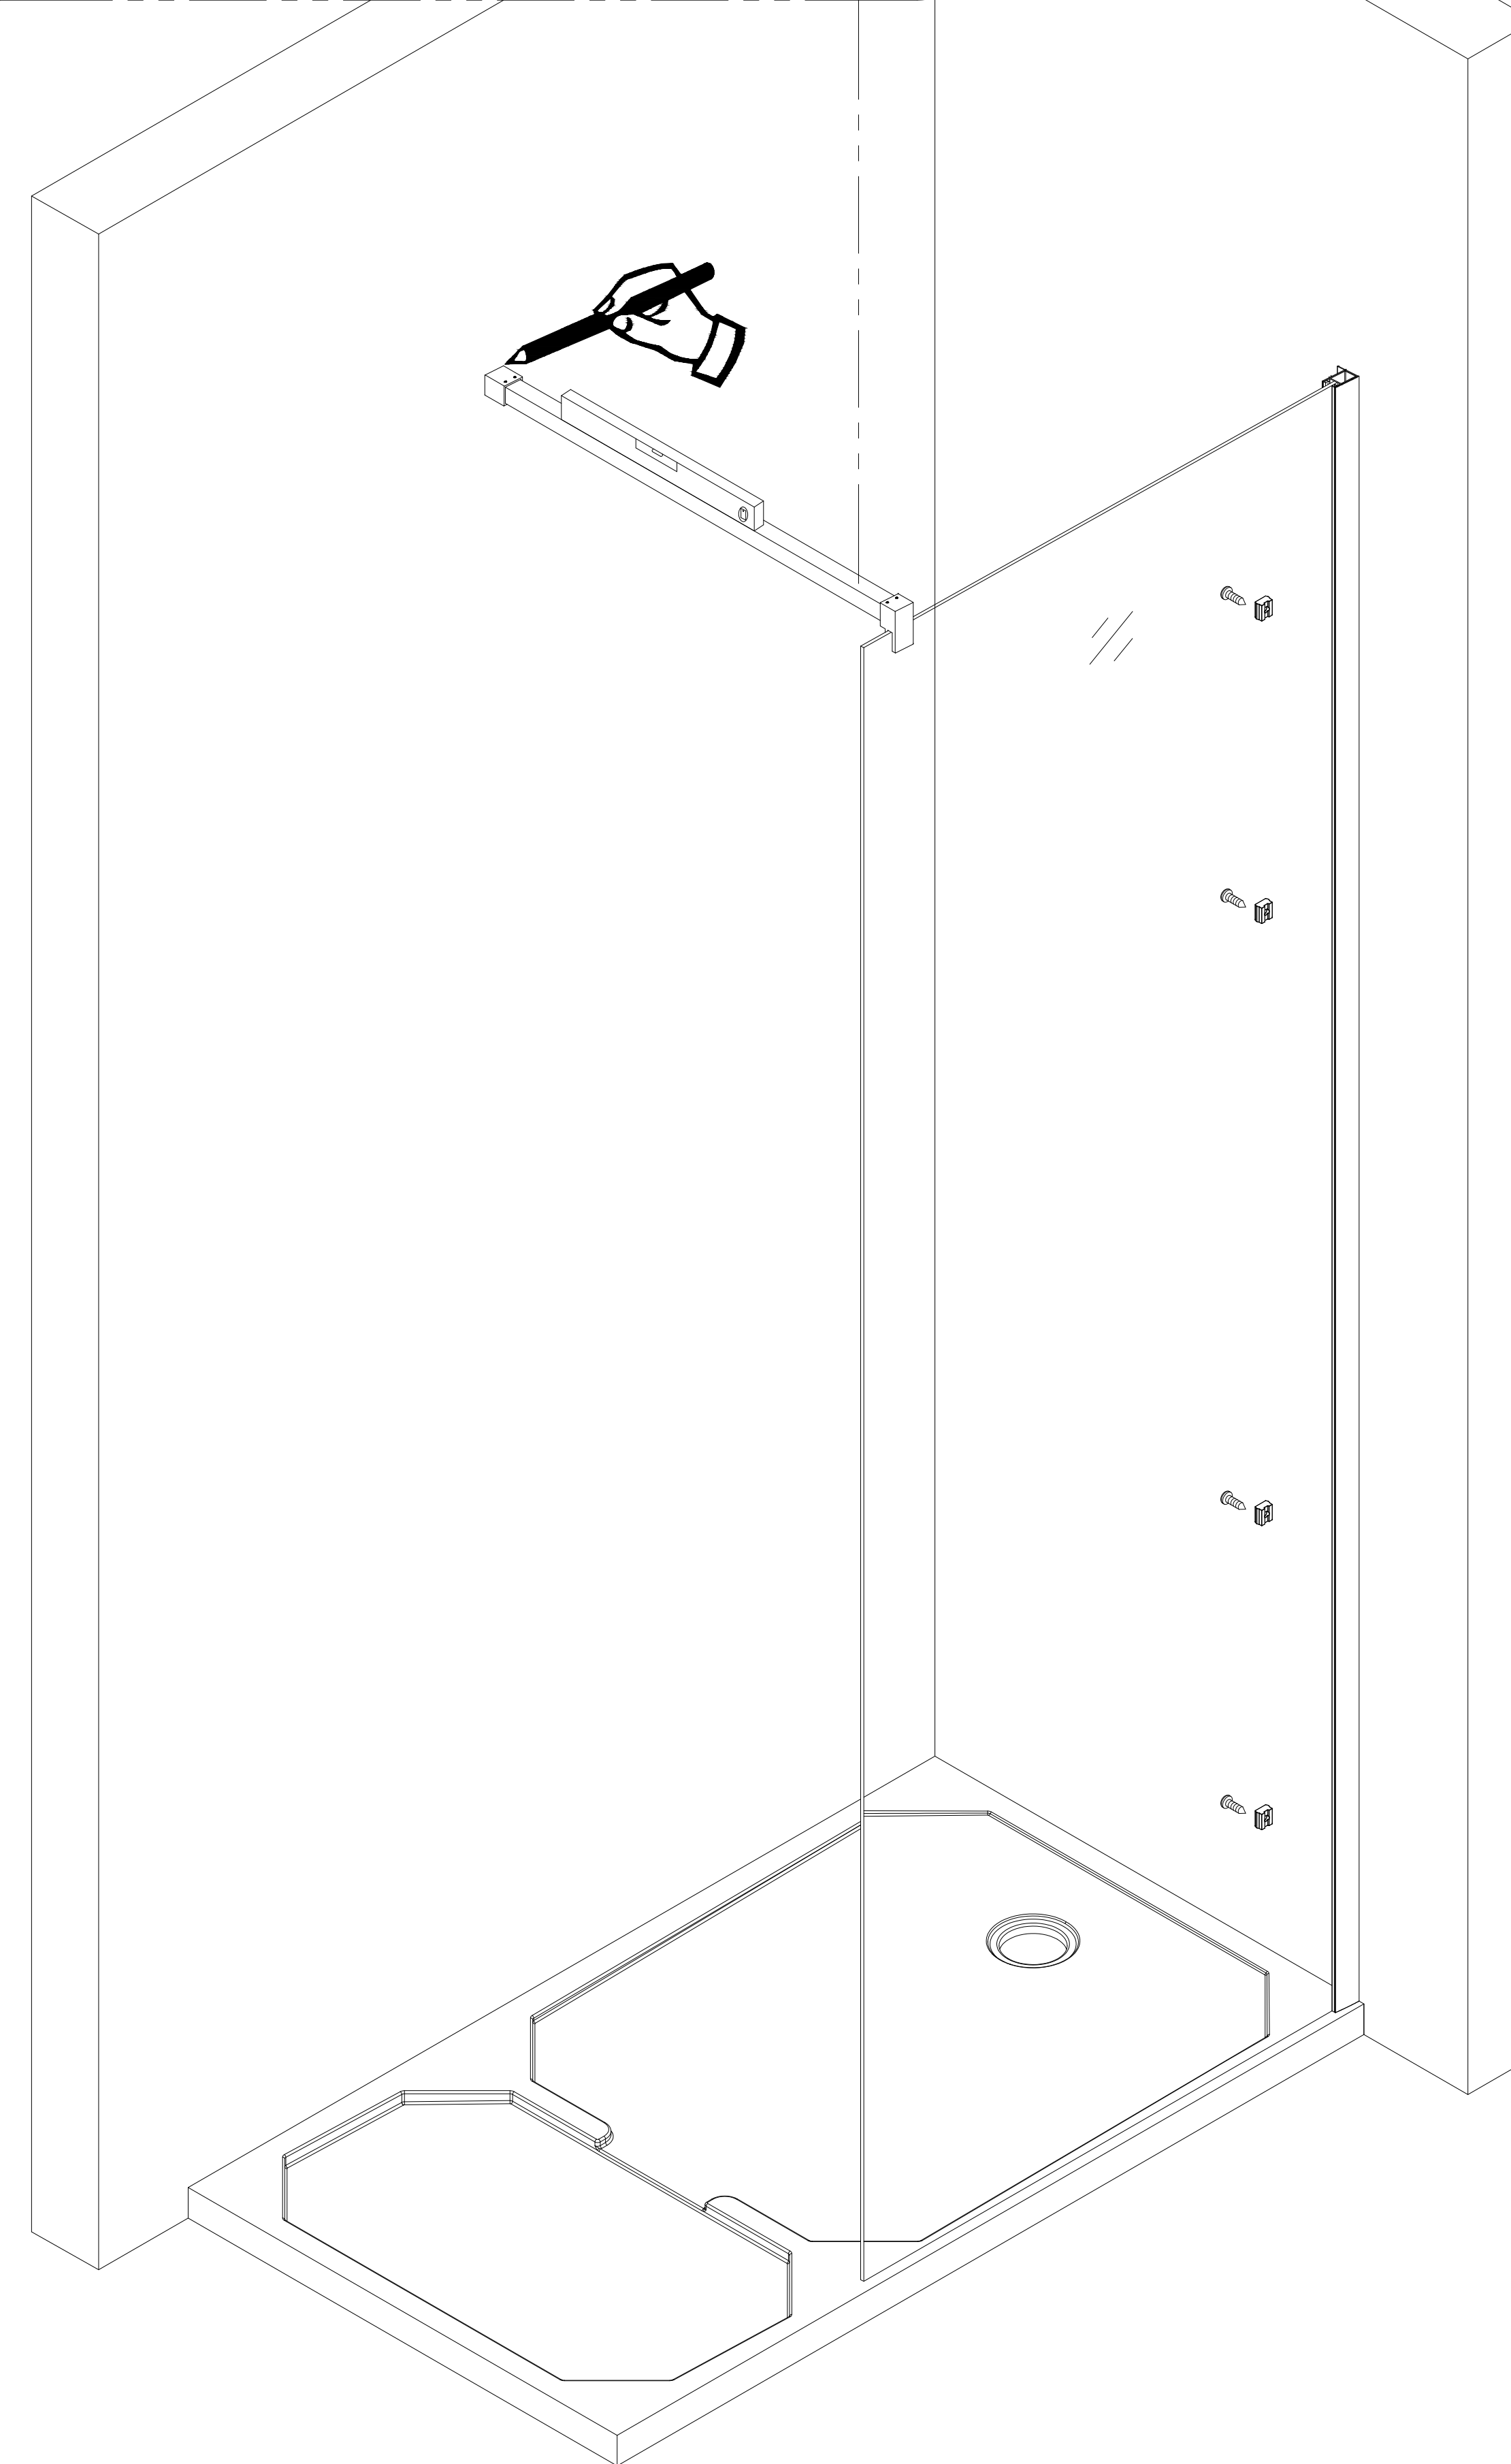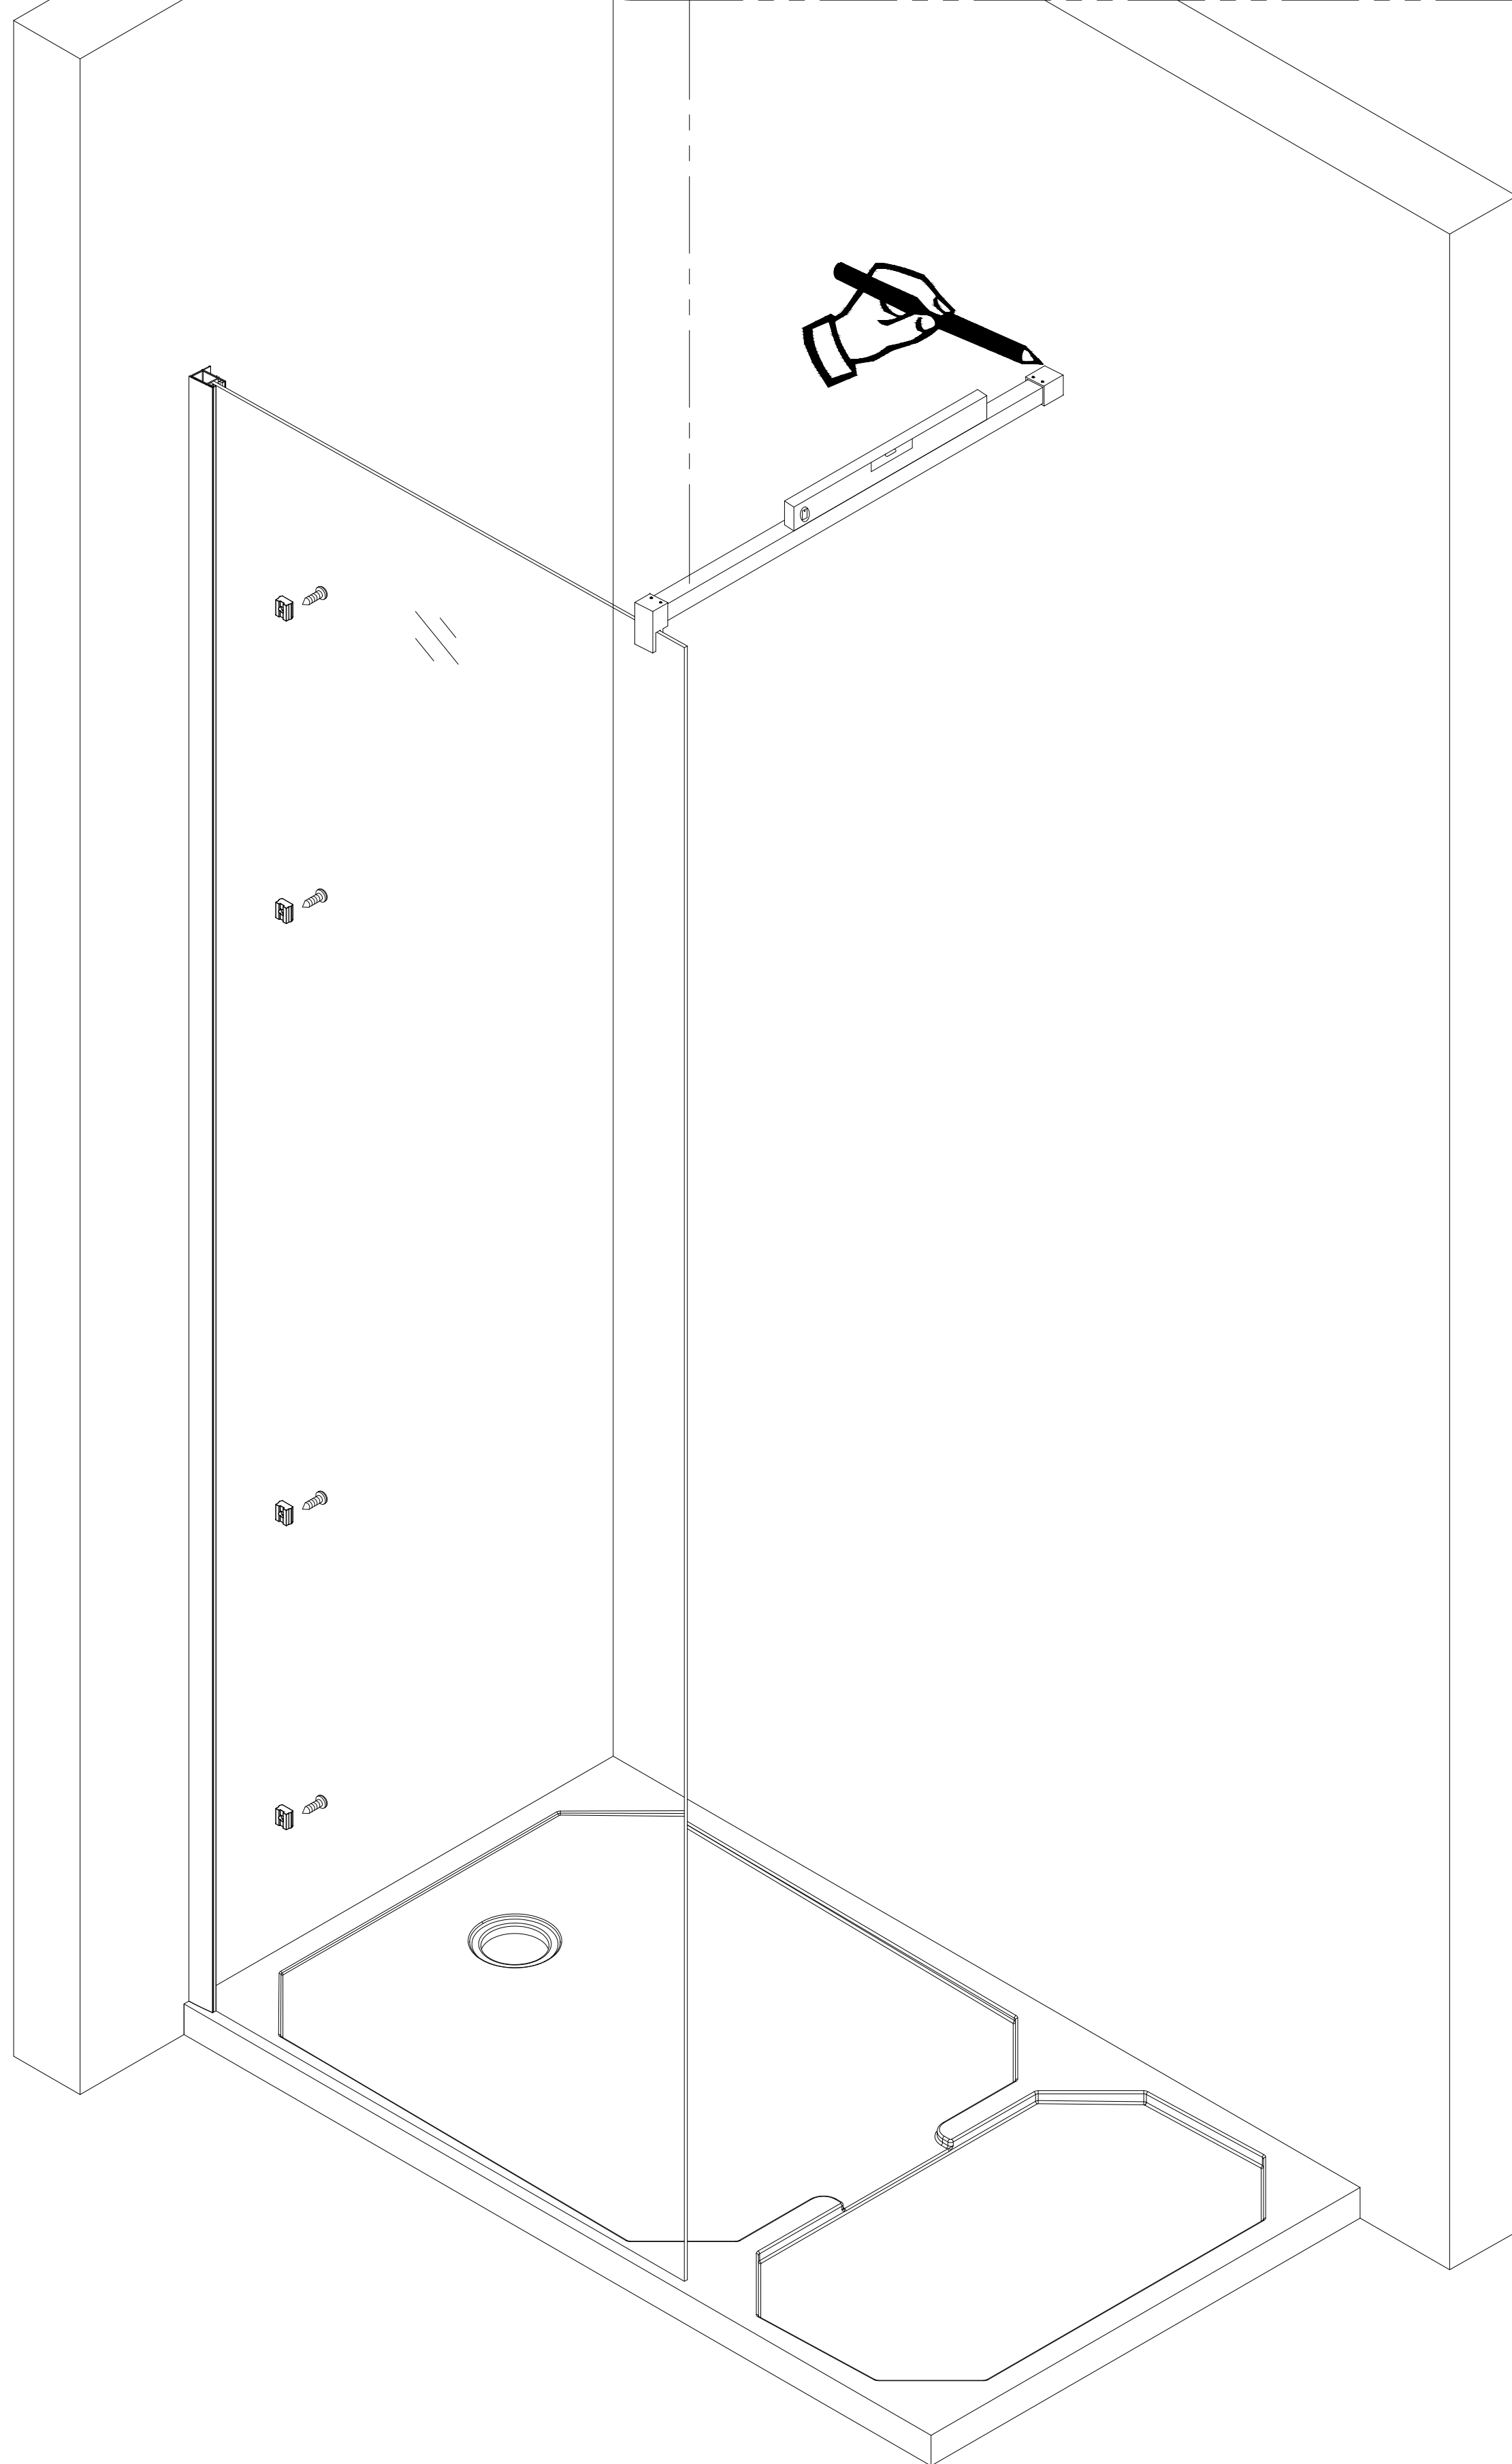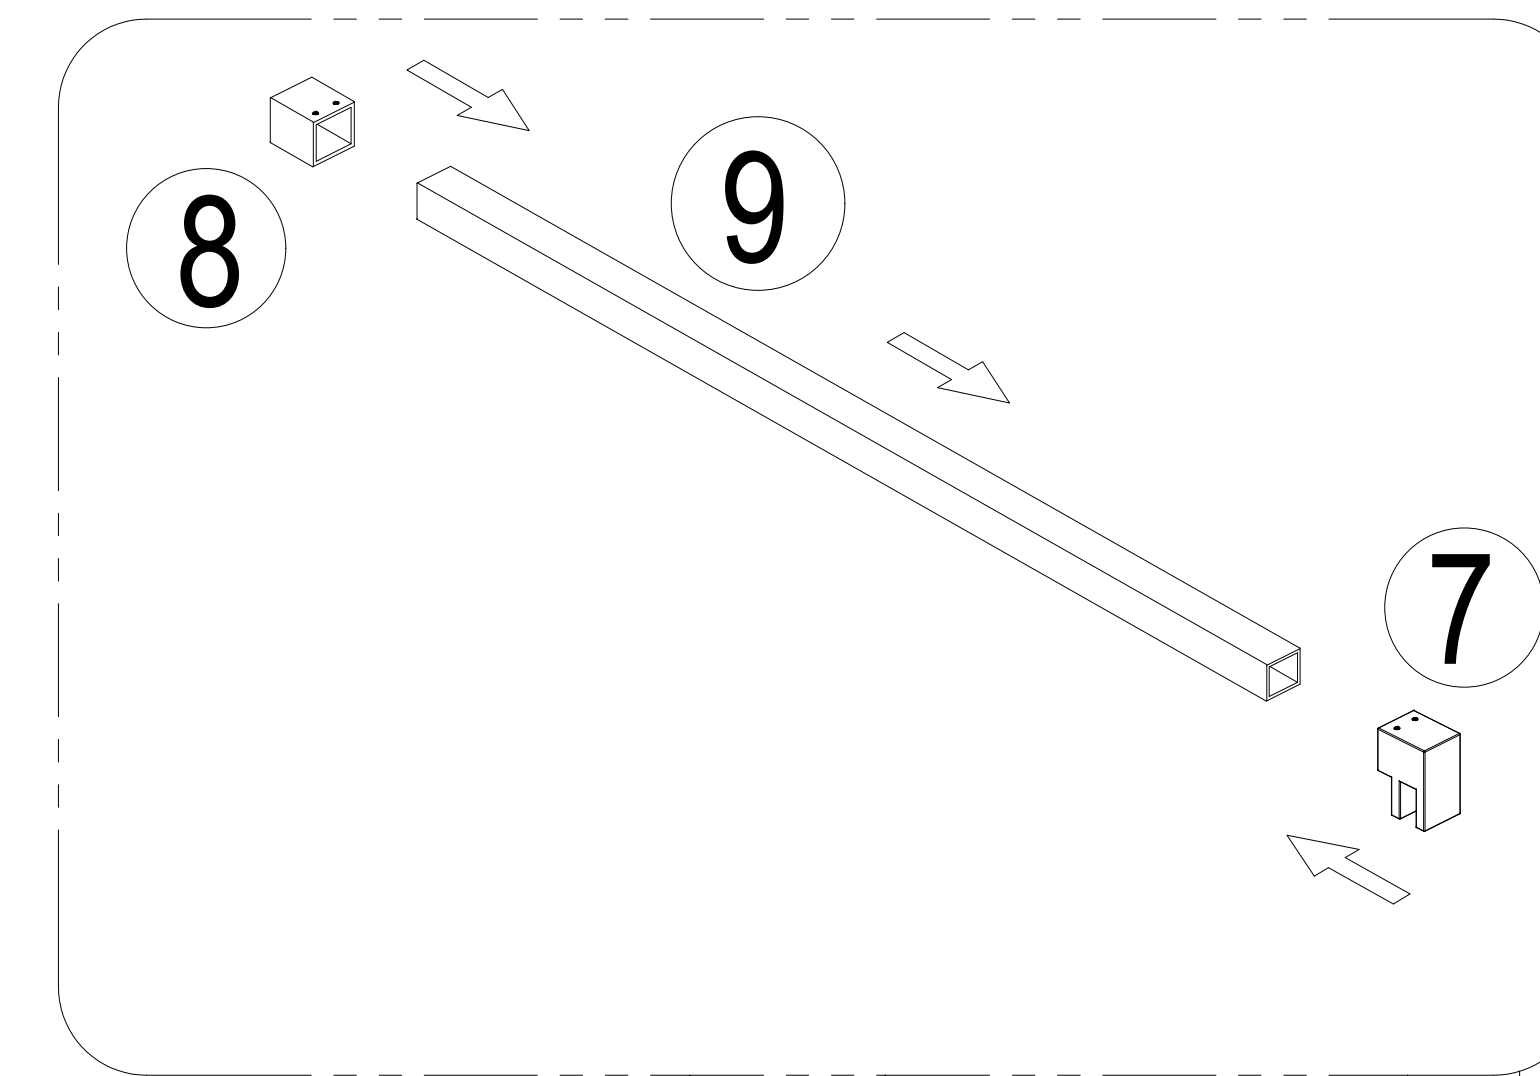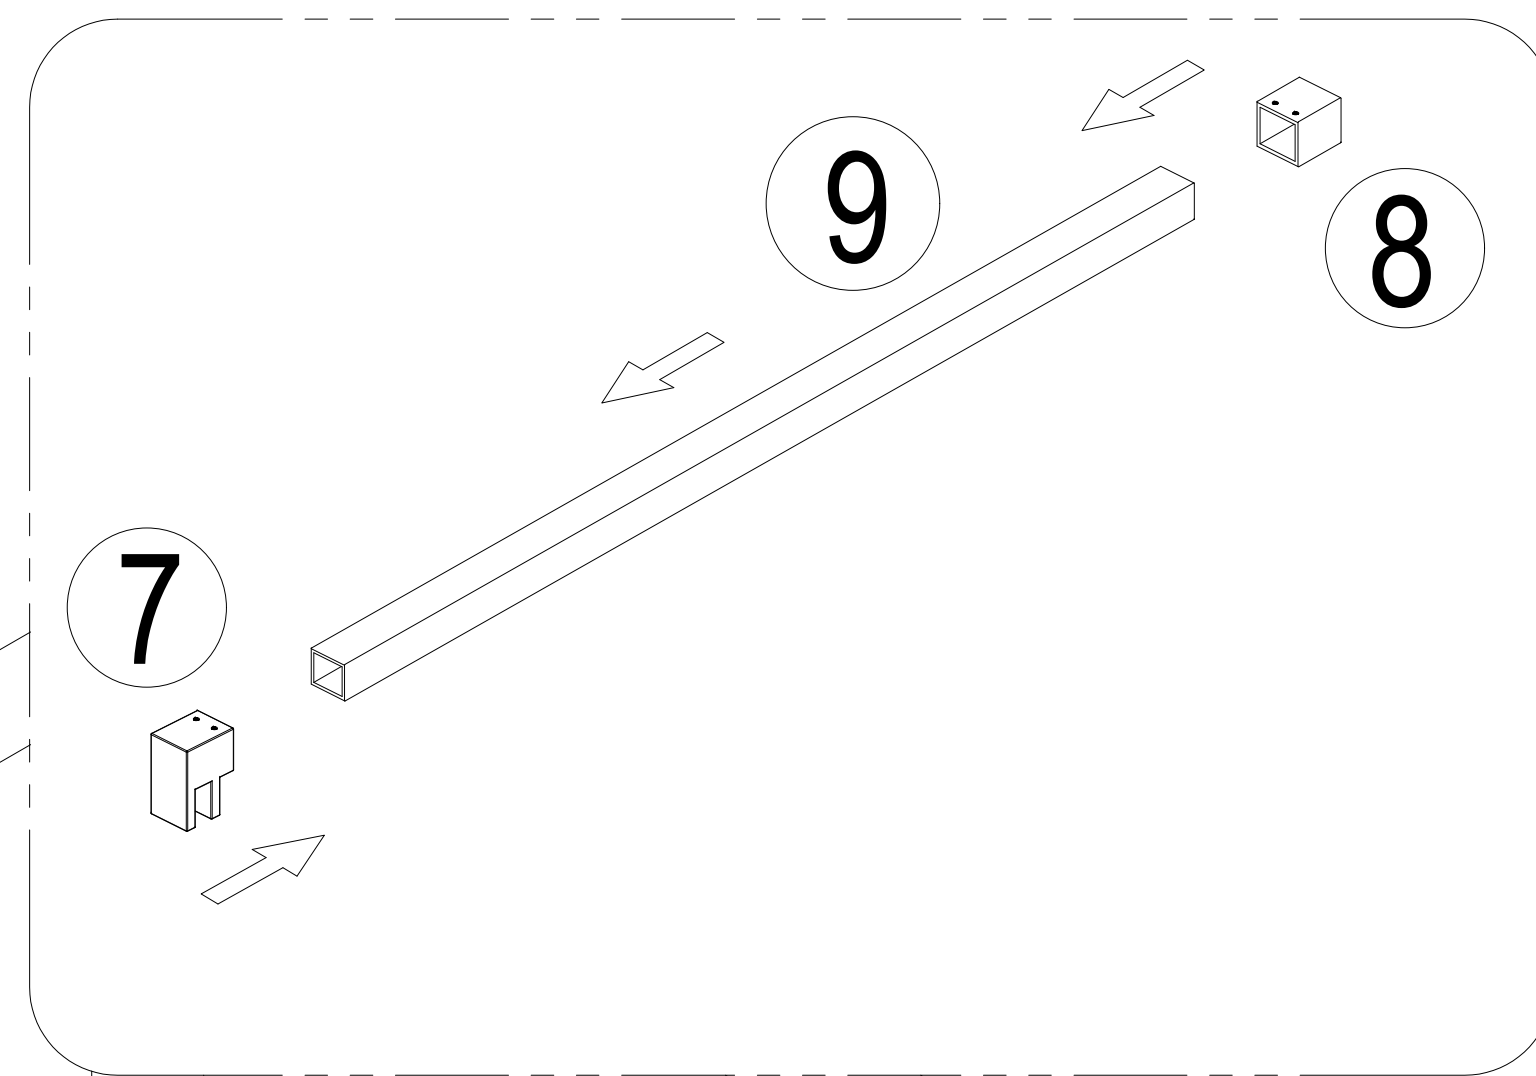

5L

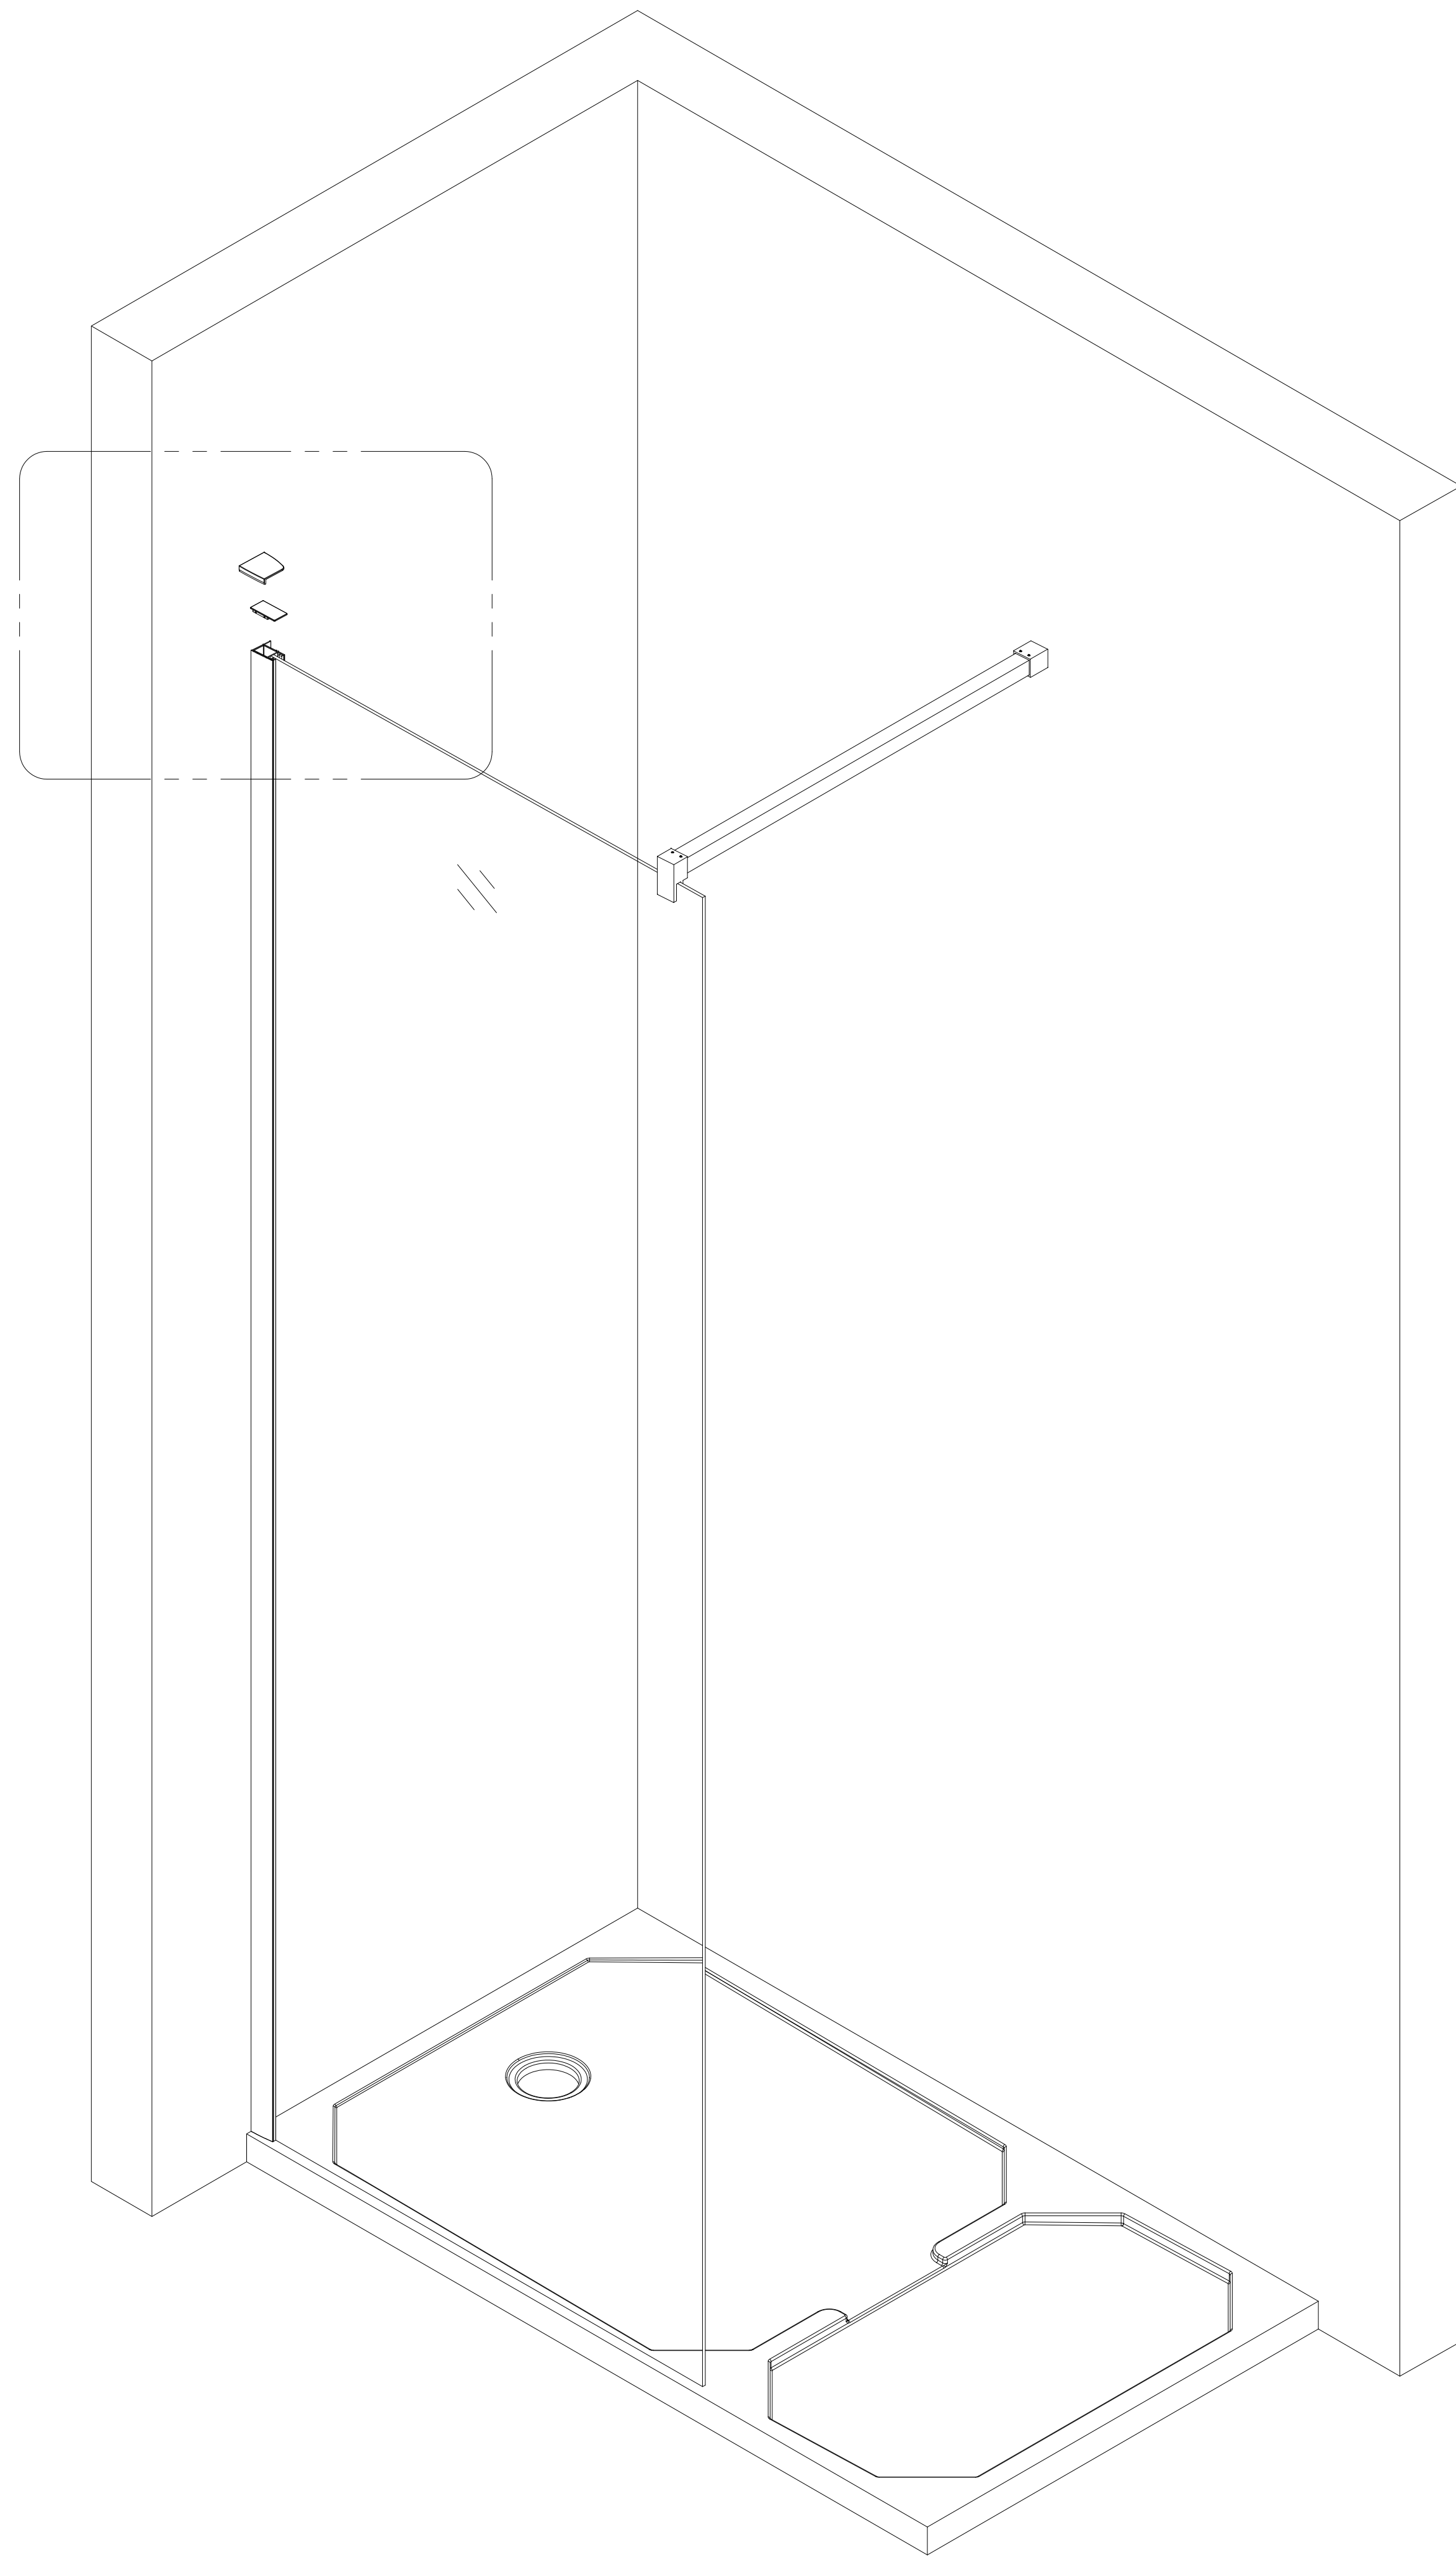


5R

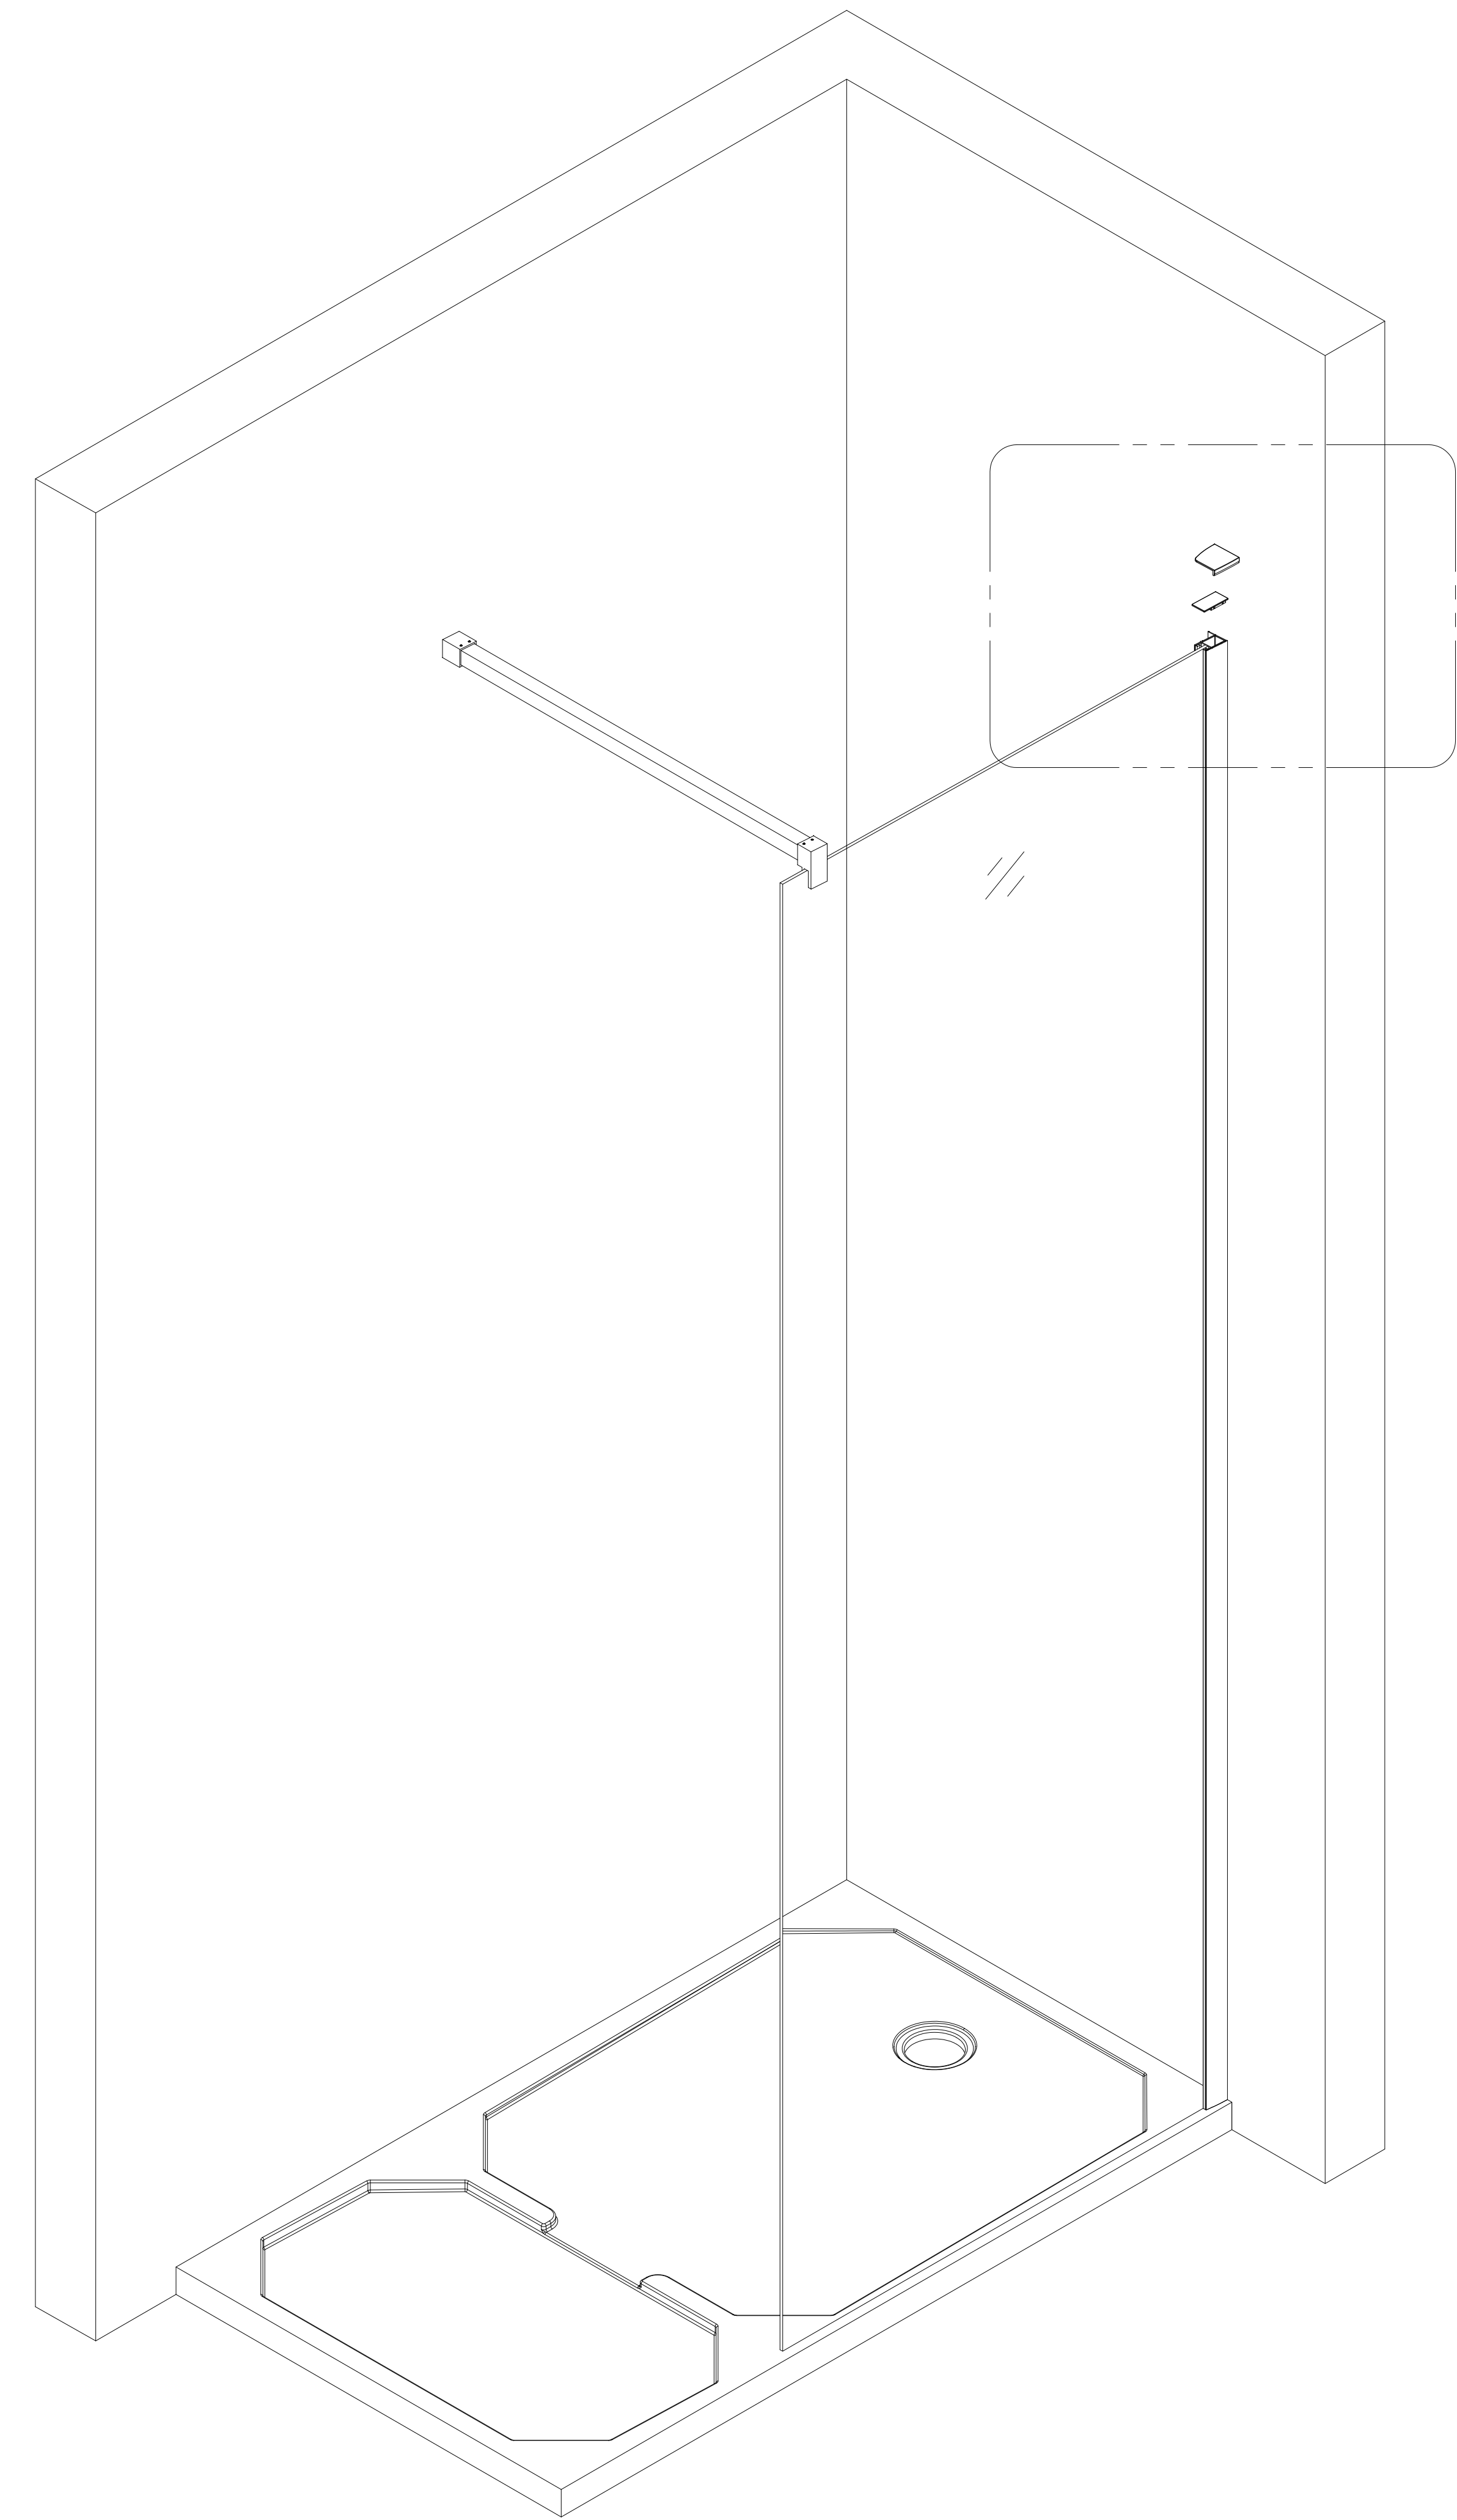

5-1


(1)

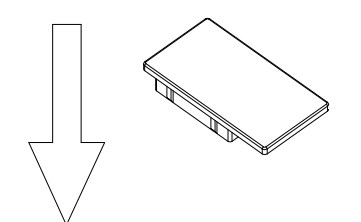

11x1

L

(2)



12x1


(2)

R

12x1

(1)



5-1

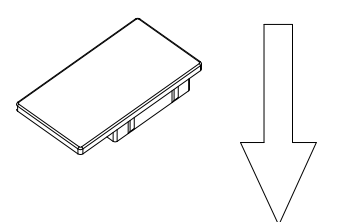

11x1

Care Instructions:

Do not use your shower enclosure within 24 hours of assembly . Do not use caustic cleaning products or abrasive material when cleaning your shower enclosure.

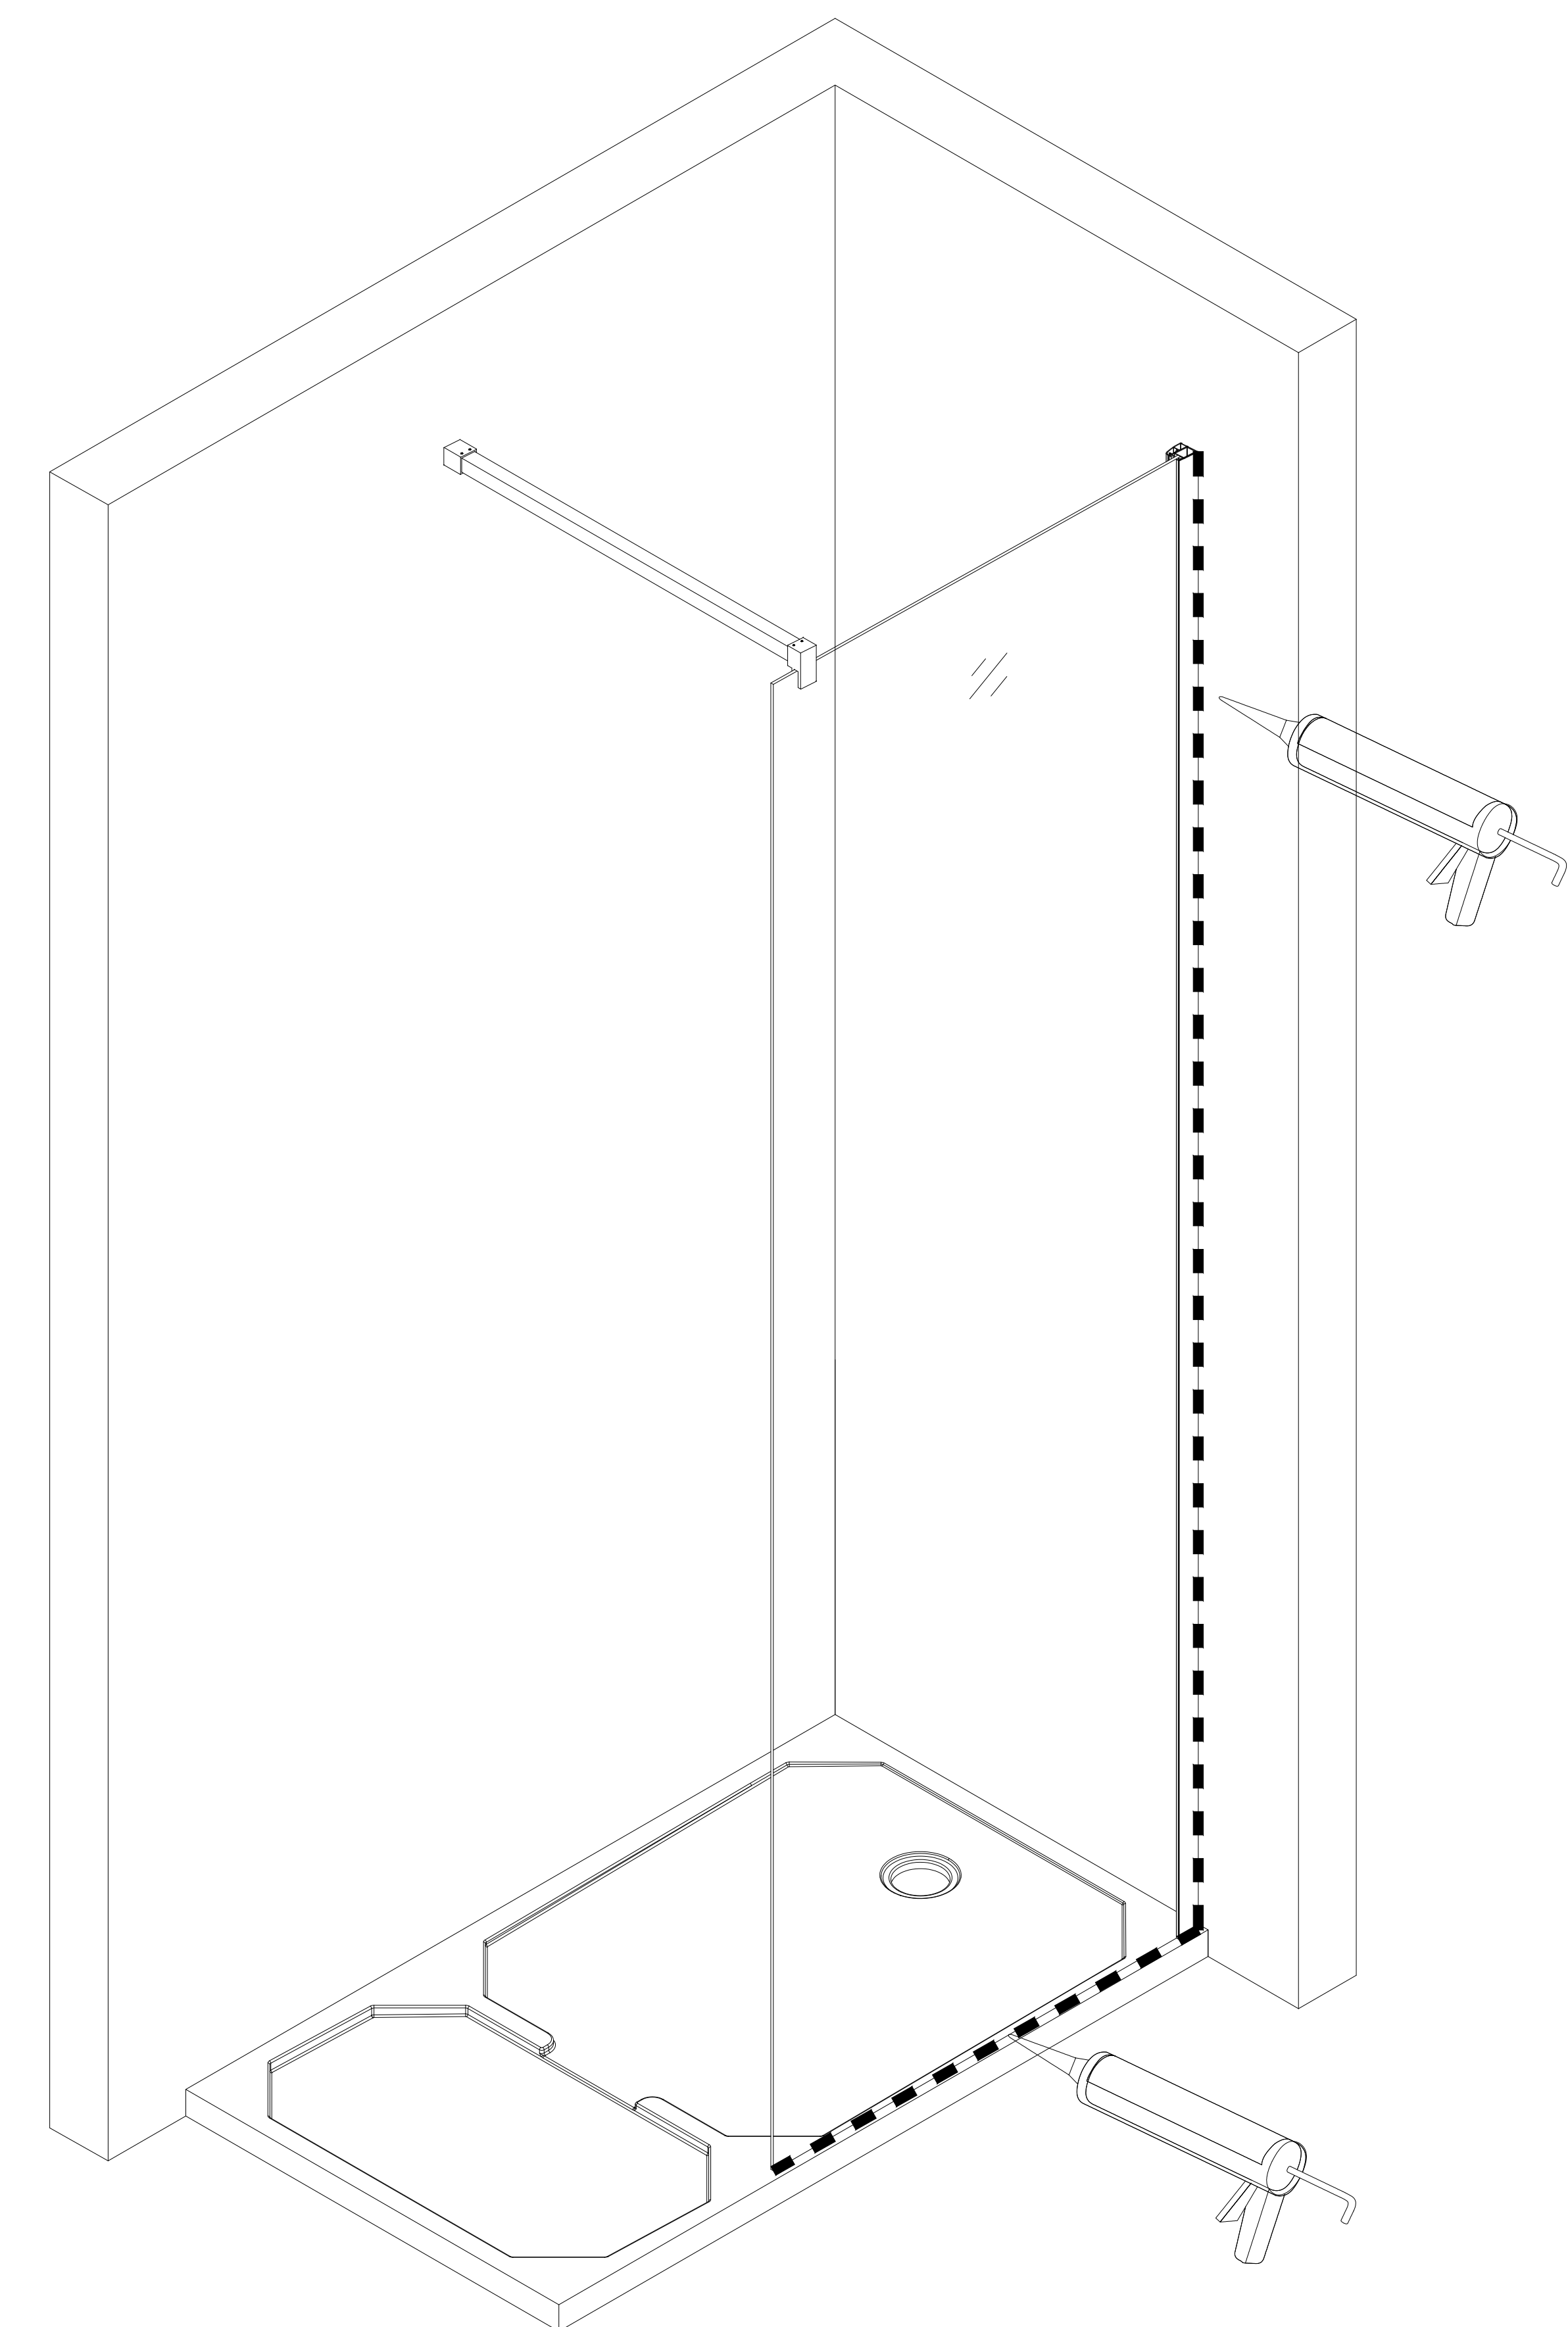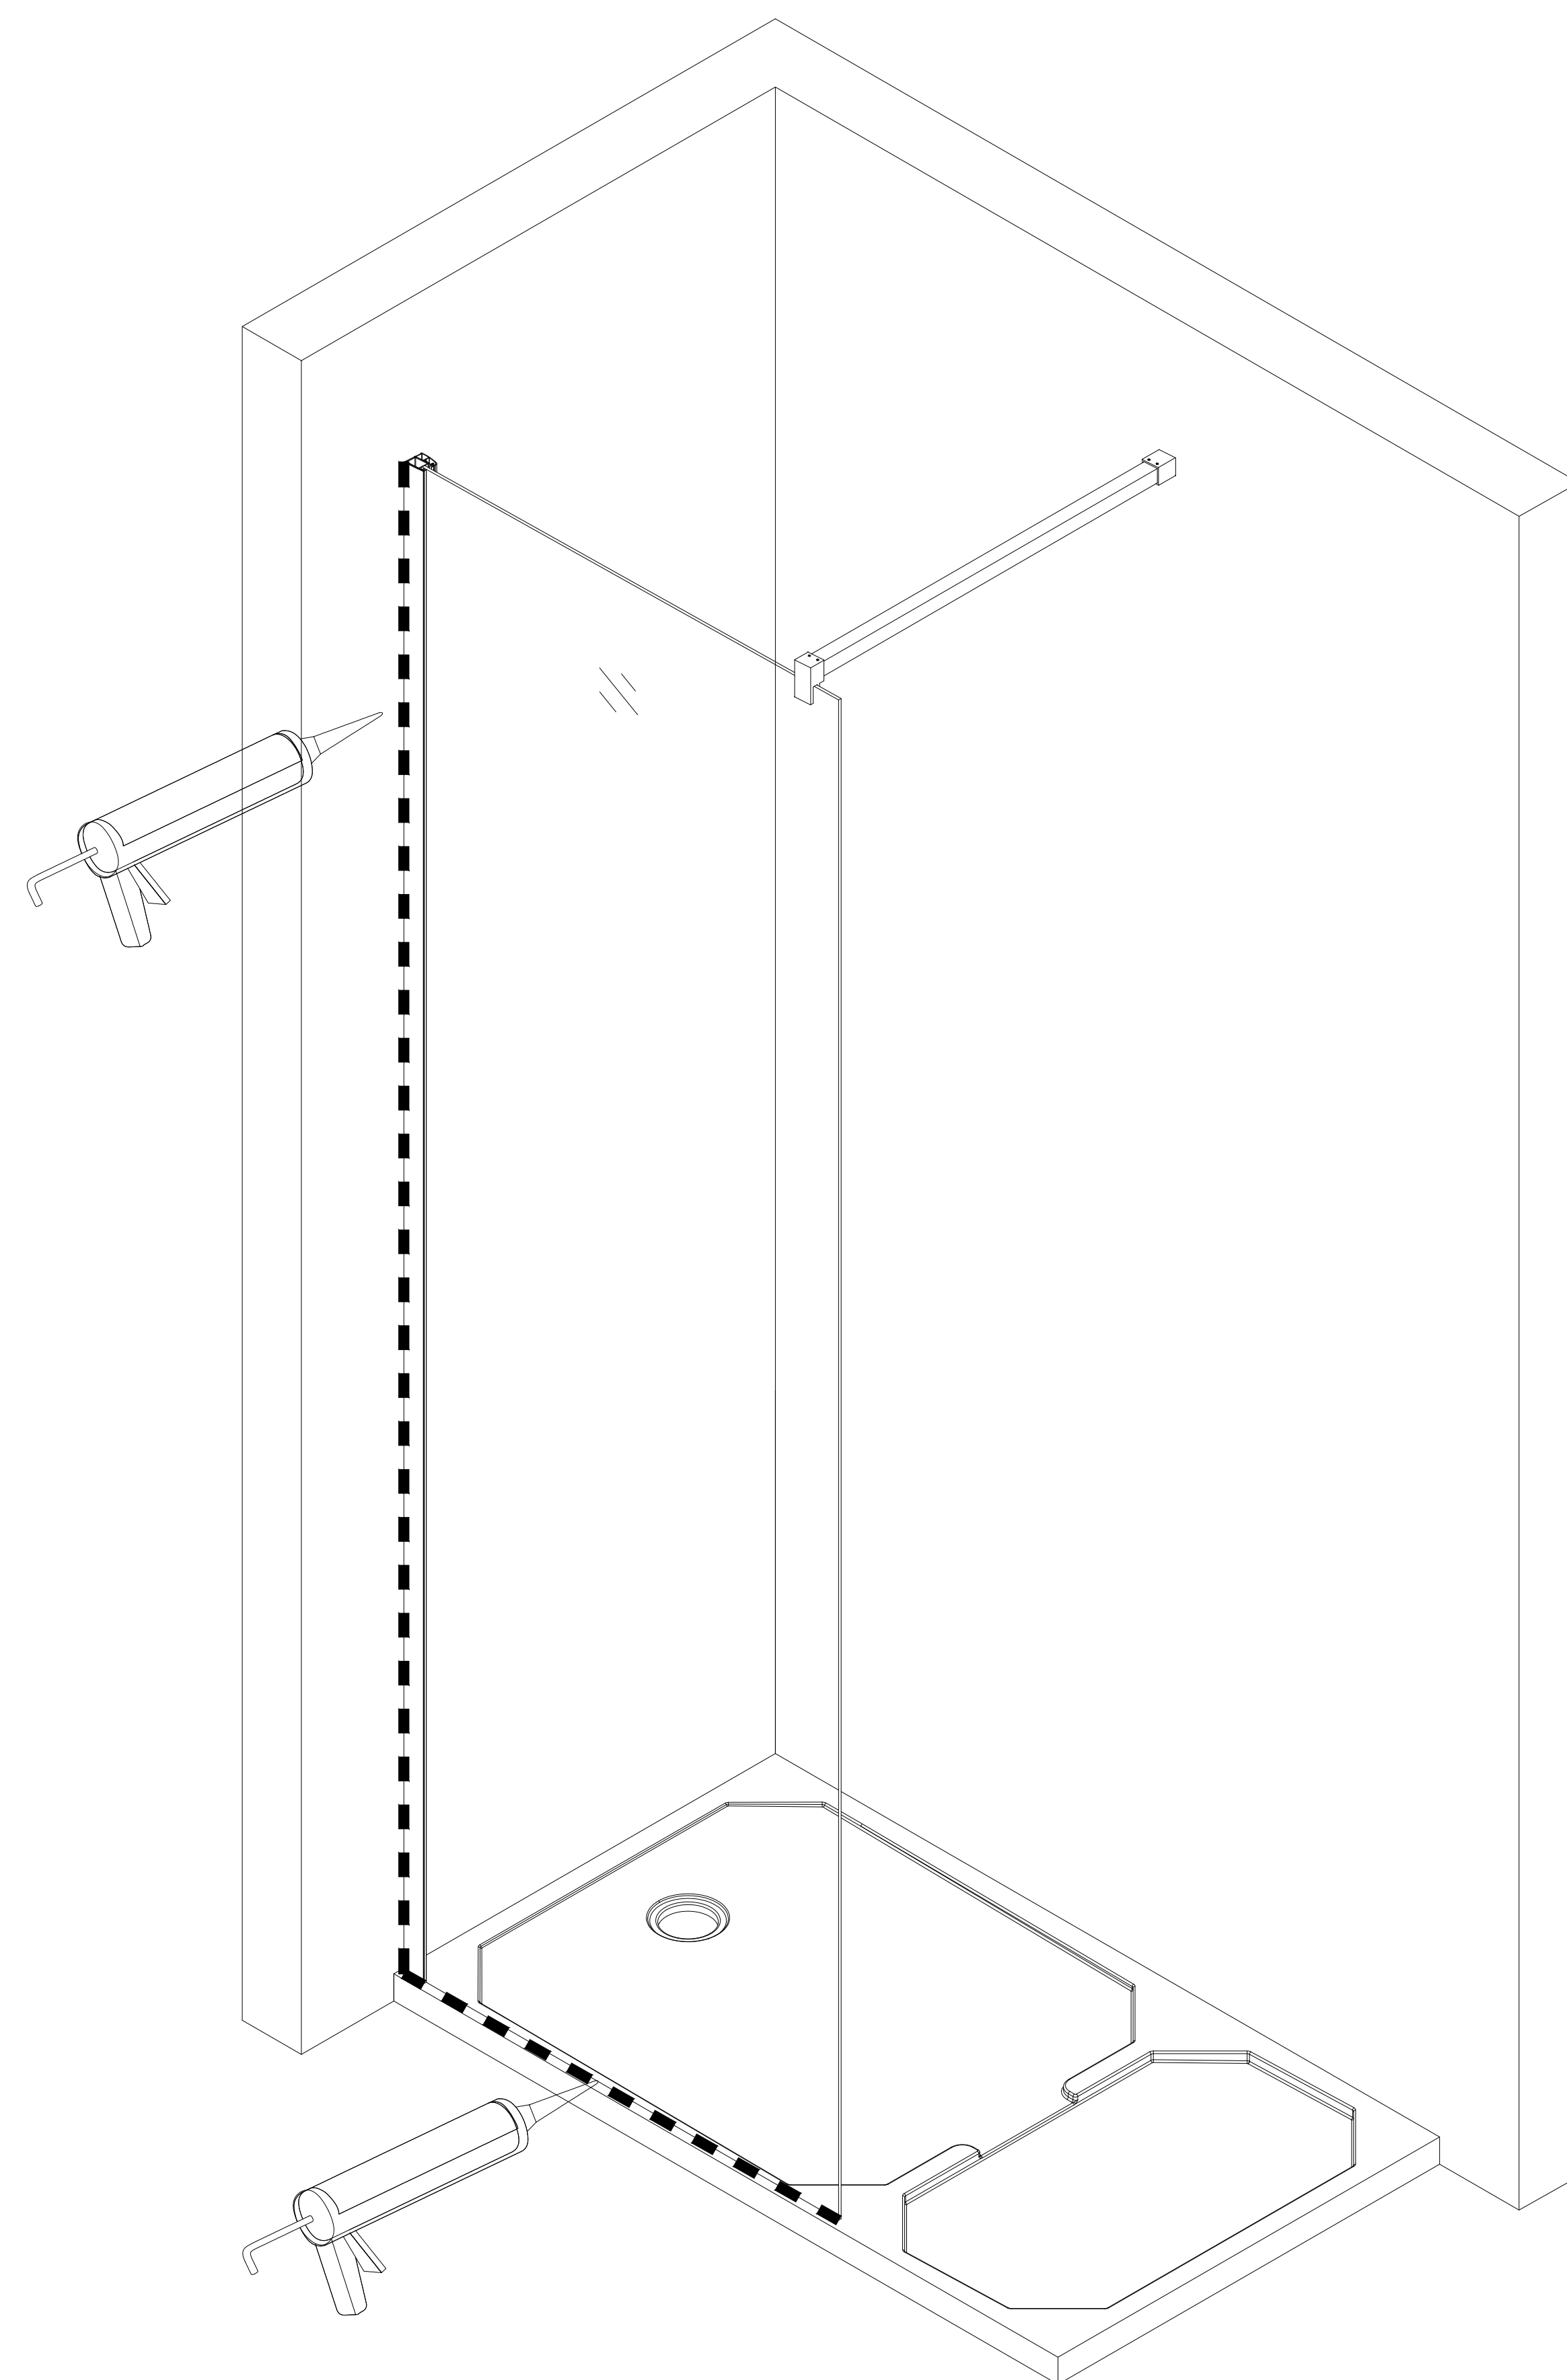



Eastbrook Road, Gloucester GL4 3DB

Technical Helpline: 01452 317890

Email: technical@eastbrookco.com

Cleaning and Maintenance of Shower Enclosures

Do not clean the shower enclosure with irritant detergents such as alcohol, bleach or other chemical cleaners.

Only clean with mild soapy water or a proprietary cleaner where the label advises it is suitable for the materials the enclosure is constructed from. Test on a small area first.

For treating limescale we would recommend distilled vinegar in a half and half solution with water.

Following installation should you find that there is a notable noise when the glass door moves you may add a small amount of silicon lubricant onto the roller wheels and tracks, hinges or clips.

It is the responsibility of the product owner to maintain the product as recommended above. Also, to check for parts which have broken or become loose to protect against failure of the enclosure.