


Parts Supplied (one of each of the following)

- ## Assembly

7. Assemble the pop up plug, fit the nut (item C) onto the adjusting screw (item D) and fit this to the stem of the plug (item A). Fit the 'O' ring (item B) to the plug. Turn the control knob so that the operating lever is in the closed position. The operating lever is part of the waste body (item Q) and is located just below the grid section. To be in the closed position the lever should be in its lowered position. Set the adjusting screw in the plug so that it is almost touching the operating lever. Operate the control

Tools required (not supplied)

- 1 x small cross head screwdriver
1 x large blade slotted screwdriver

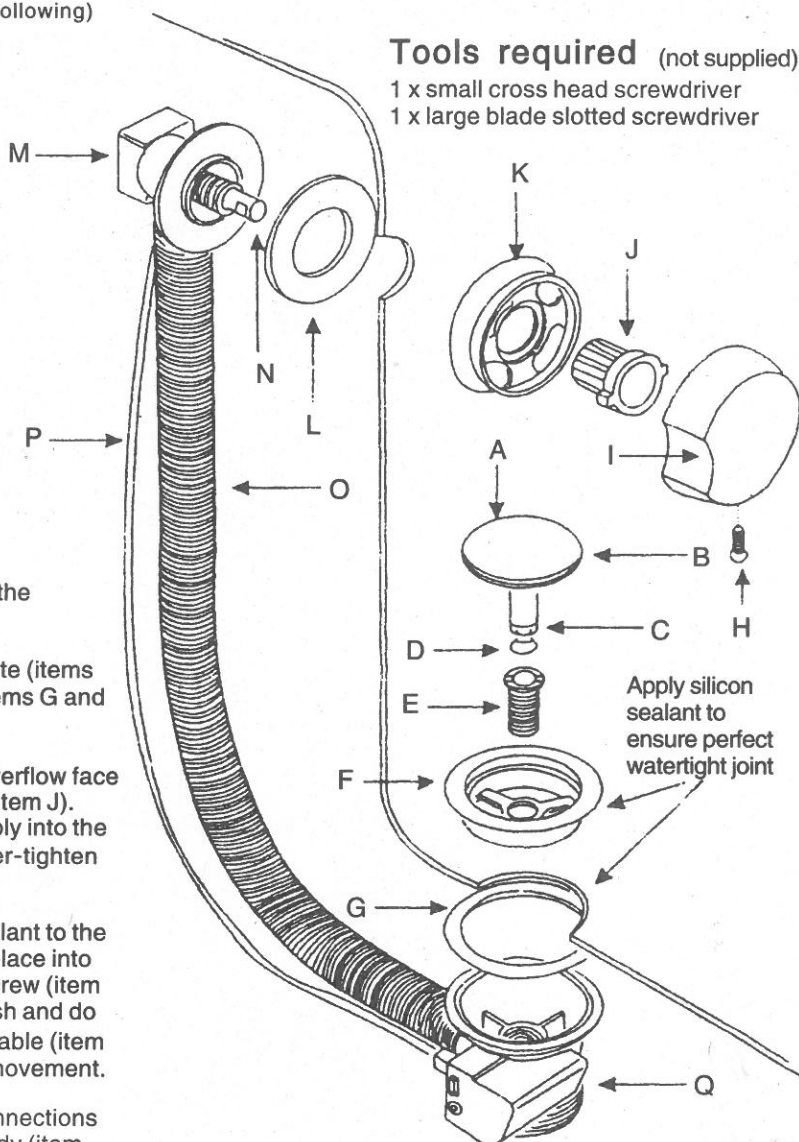

Knob to check that the plug 'pops up' sufficiently to allow the water to be drained from the bath. Tighten the nut (item C).

8. Fill the bath with water and check all joints to ensure there are no leaks. This is best done in stages starting with a small amount of water before fully filling the bath.

9. Once fitting has been completed carefully clean all plated surfaces. The finished surfaces on this product are hard and durable and should be cleaned on a regular basis to maintain their appearance. They should only be cleaned with warm soapy water and then wiped with a dry cloth. Under no circumstances should any aggressive or abrasive cleaning agent be used, as this can lead to a deterioration of the high quality finish.

10. If you require any further information, assistance or spares, please quote reference BSBA4082/PUW195.