


Eastbrook Road, Gloucester GL4 3DB Technical Helpline: 01452 317890 email: technical@eastbrookco.com

INSTALLATION MANUAL





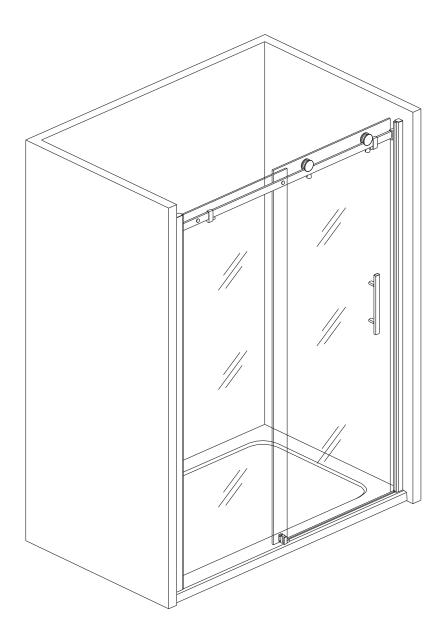





TOOLS REQUIRE



Pencil



(06,03.2) bit drill



Silicone gun



Flat and cross screwdriver



Tap measure



Level ruler



Drill machine




Spanner





Rubber hammer


PACKING LIST





X2 B































































PRODUCT SCHEMATIC DIAGRAM

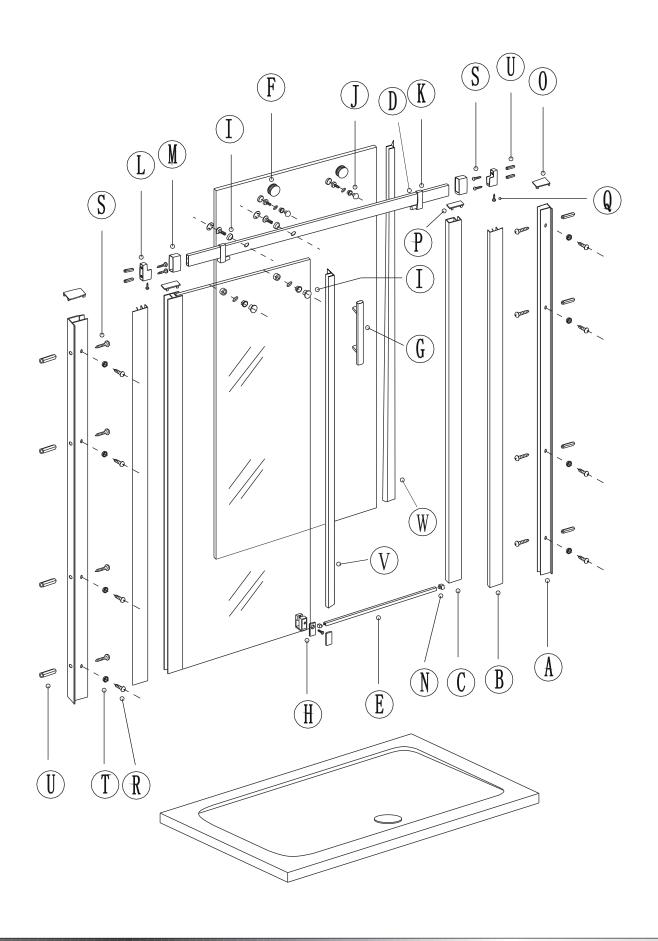


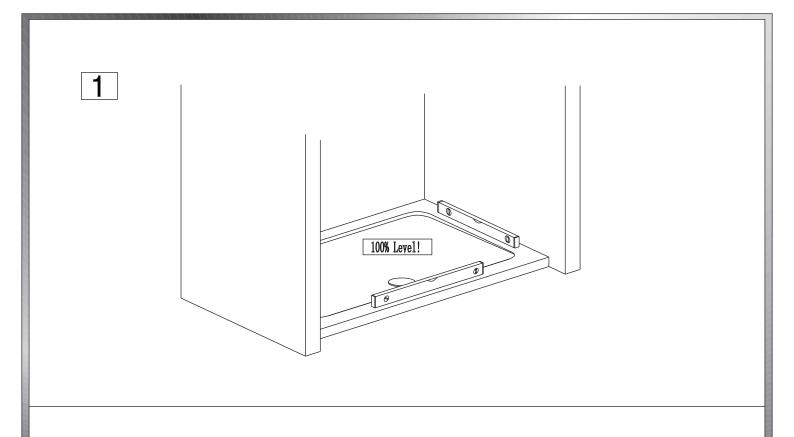


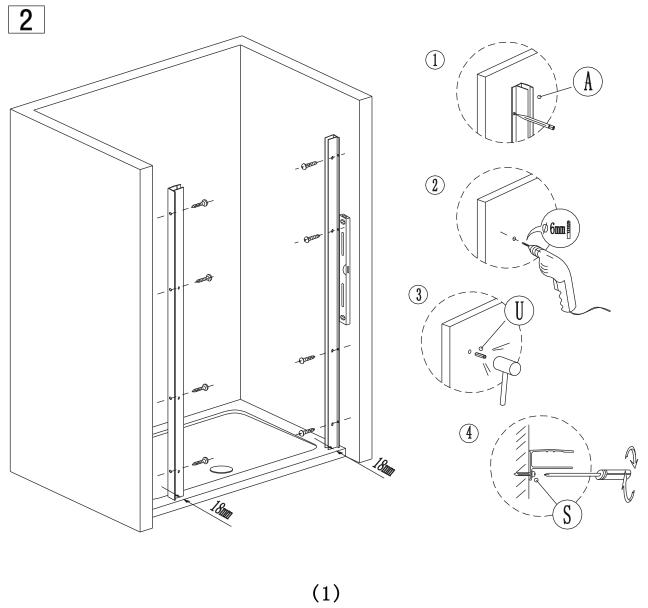


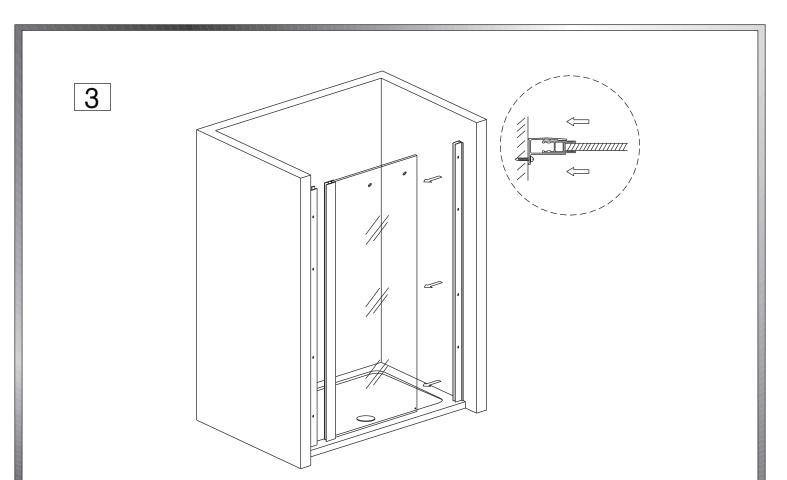


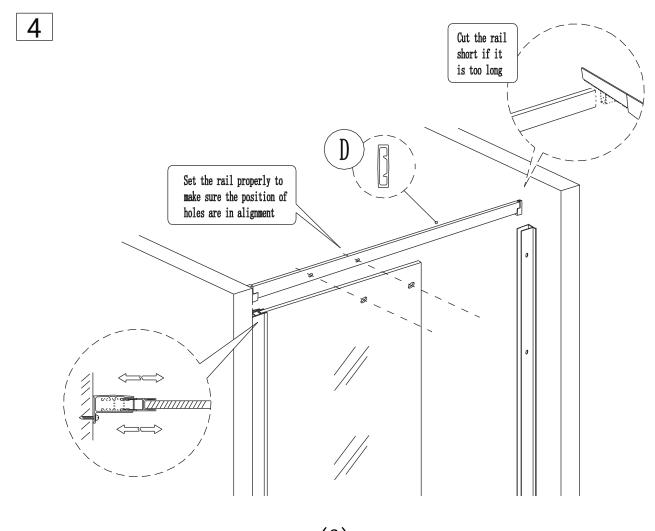


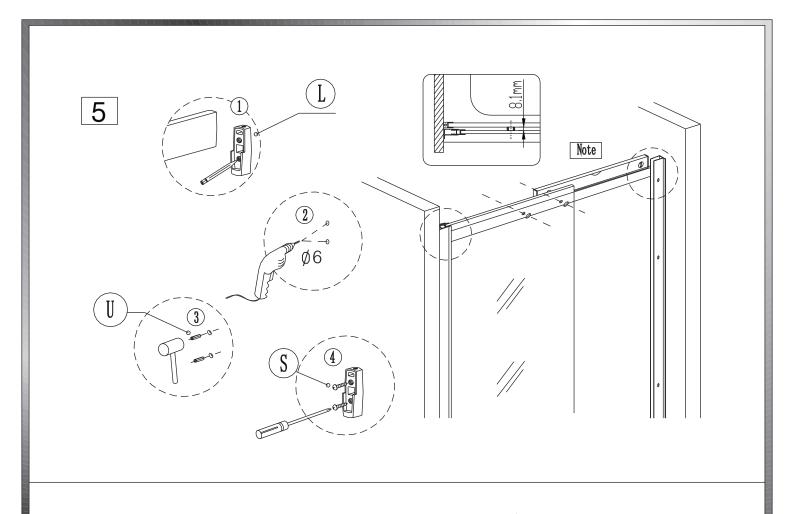

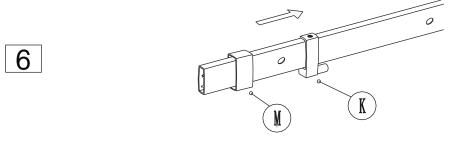


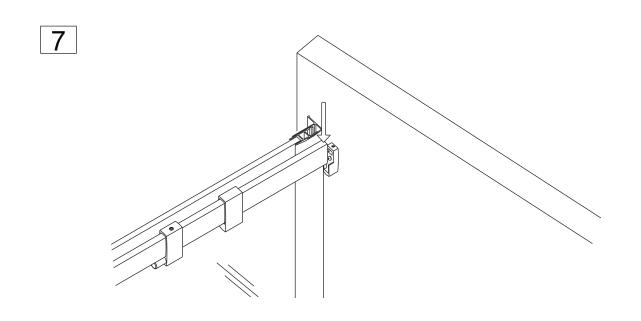

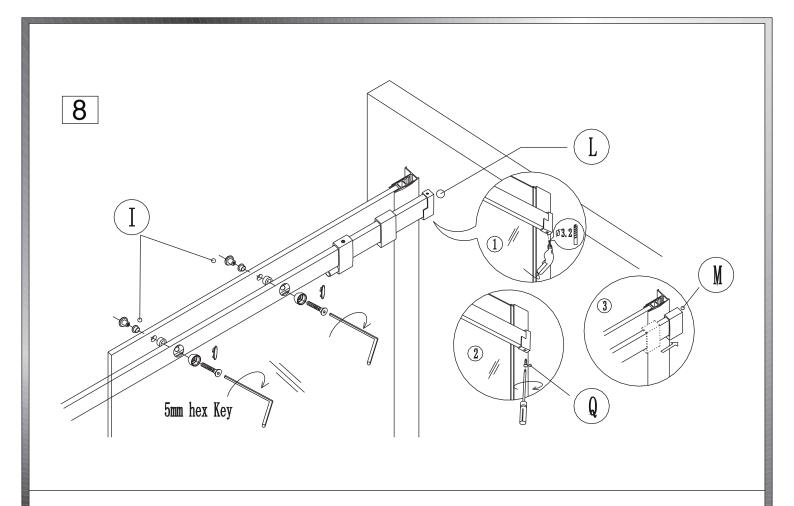


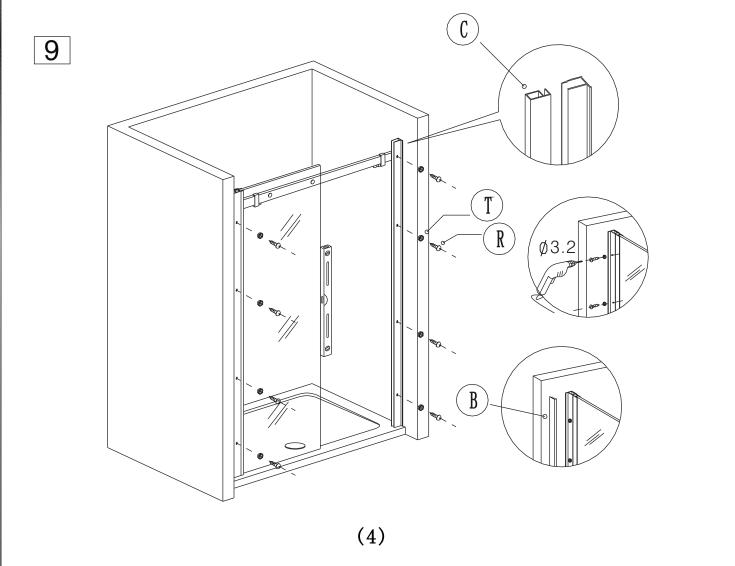





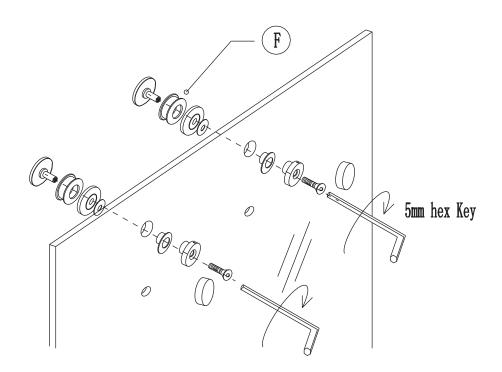


11

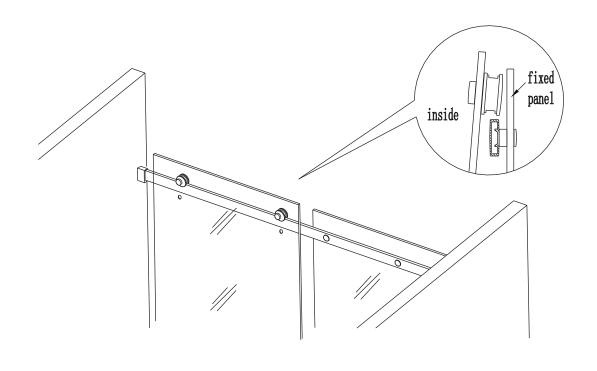

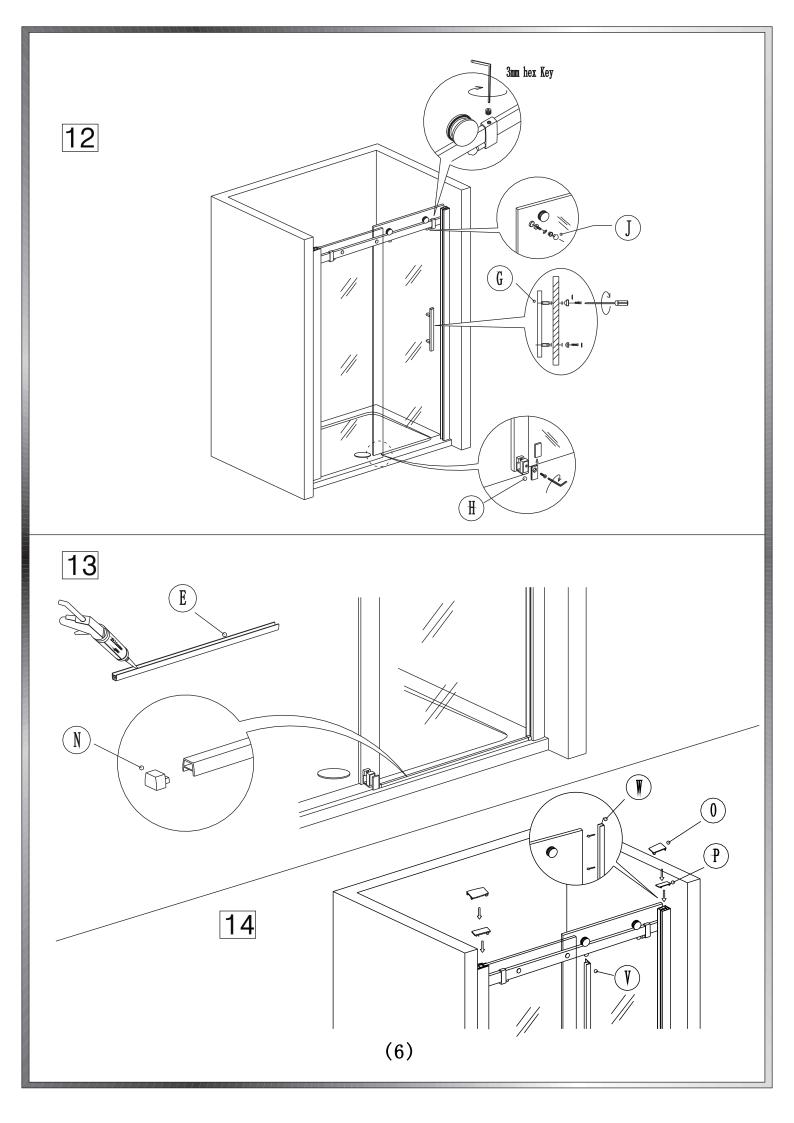

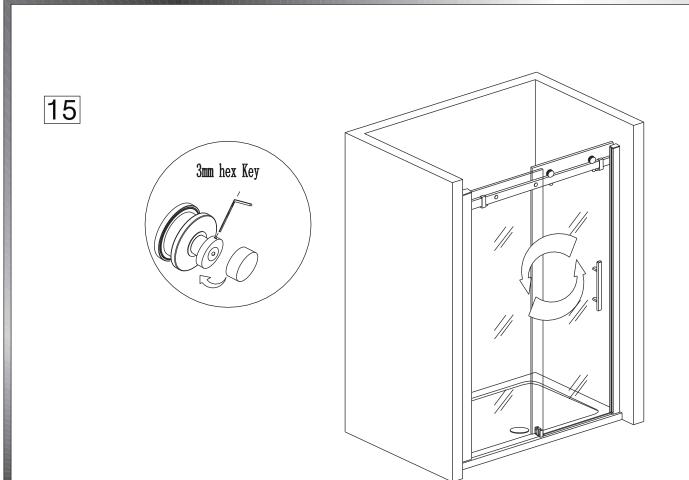

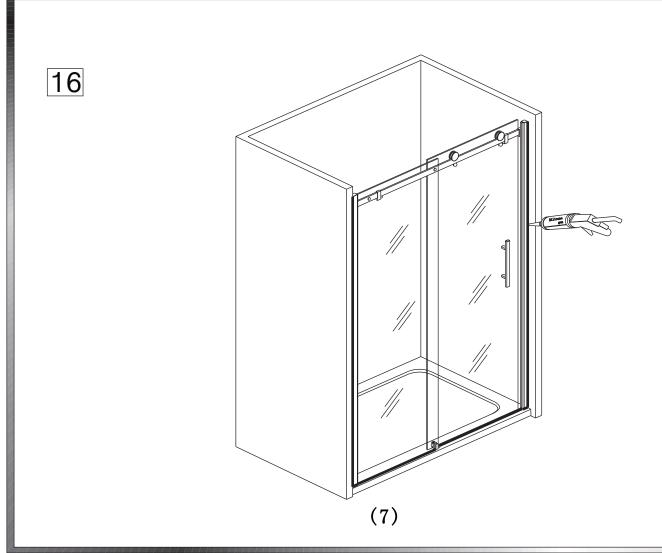

Cleaning & Maintenance

Don't clean the shower enclosure with irritant detergent such as alcohol, bleach or other chemical cleaners.

Only clean with warm soapy water.

After the installation is completed, should you find that there is notable noise when the glass door moves, you may add a small quantity of lubricant onto the roller wheel, slipping hook and the track.

Helpline: 01452 317890

Please ensure silicone sealant is on the outside only.