49.3226A/49.3227A/49.3228A/49.3229A/49.3231A/49.3232A/ 49.3233A/49.3234A/49.3235A/49.3236A/49.3204A/49.3205A/ 49.3206A/49.3207A/

Eastbrook

Eastbrook Road,Gloucester GI4 3DB

Technical Helpline:01452 317890

email:technical@eastbrookco.com

L

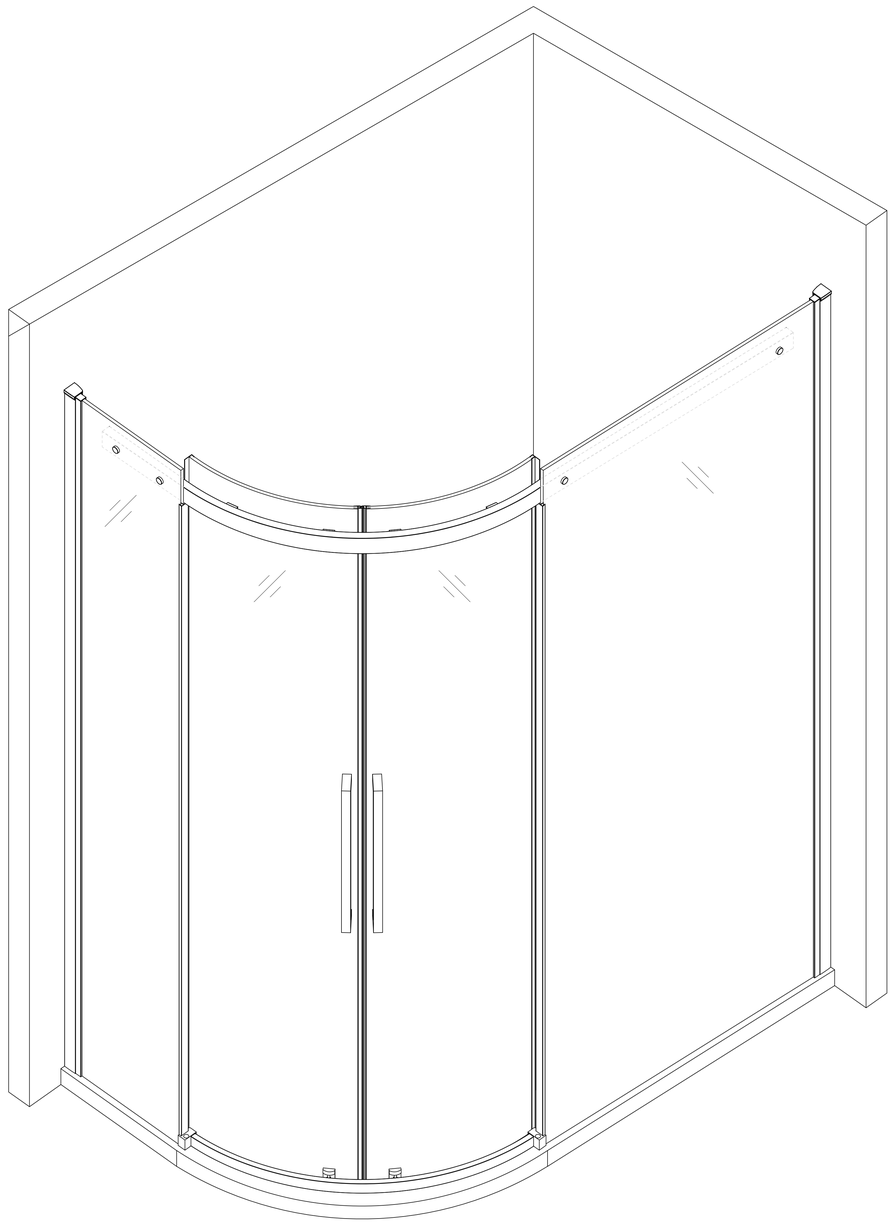

This product should only be fitted by a fully qualified installer.

R

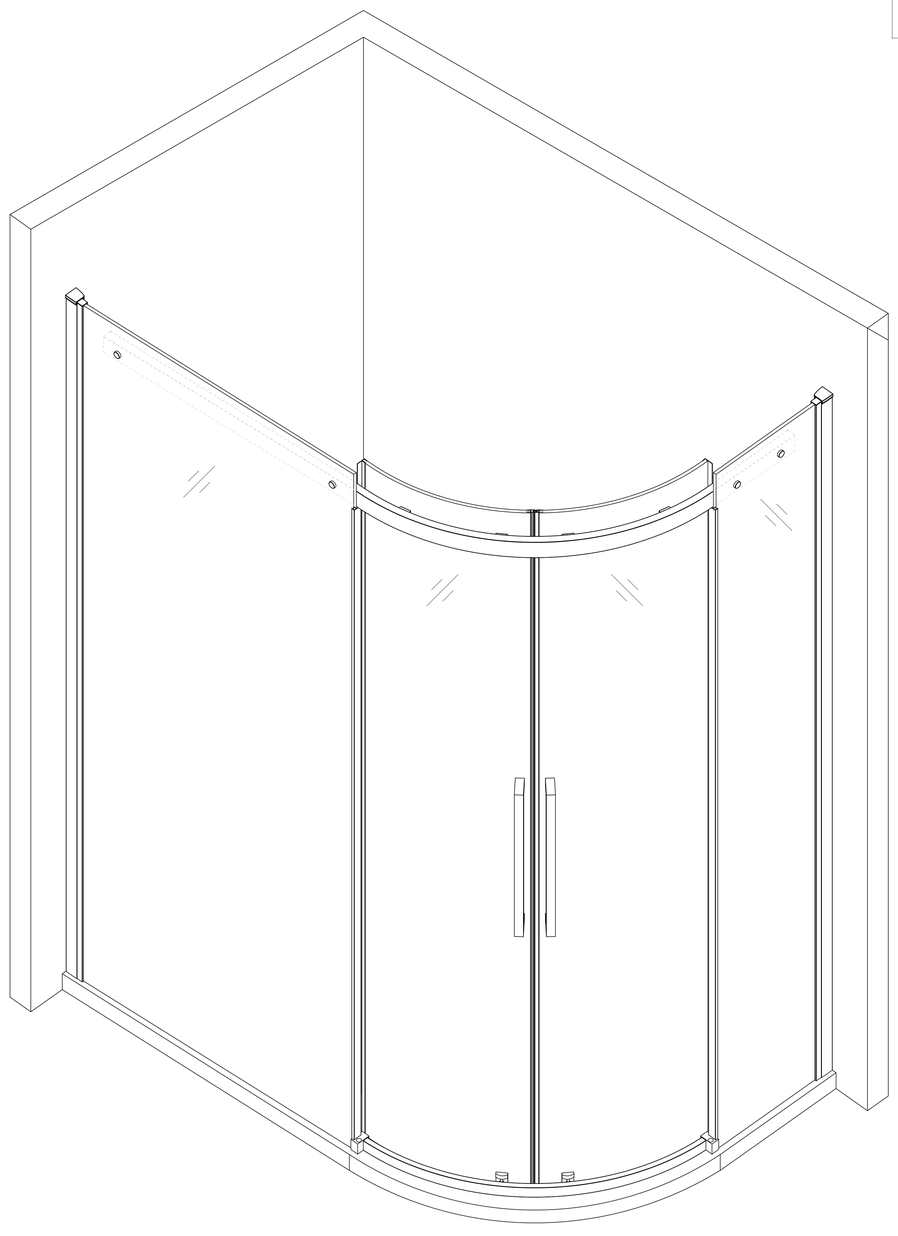

This product should only be fitted by a fully qualified installer.

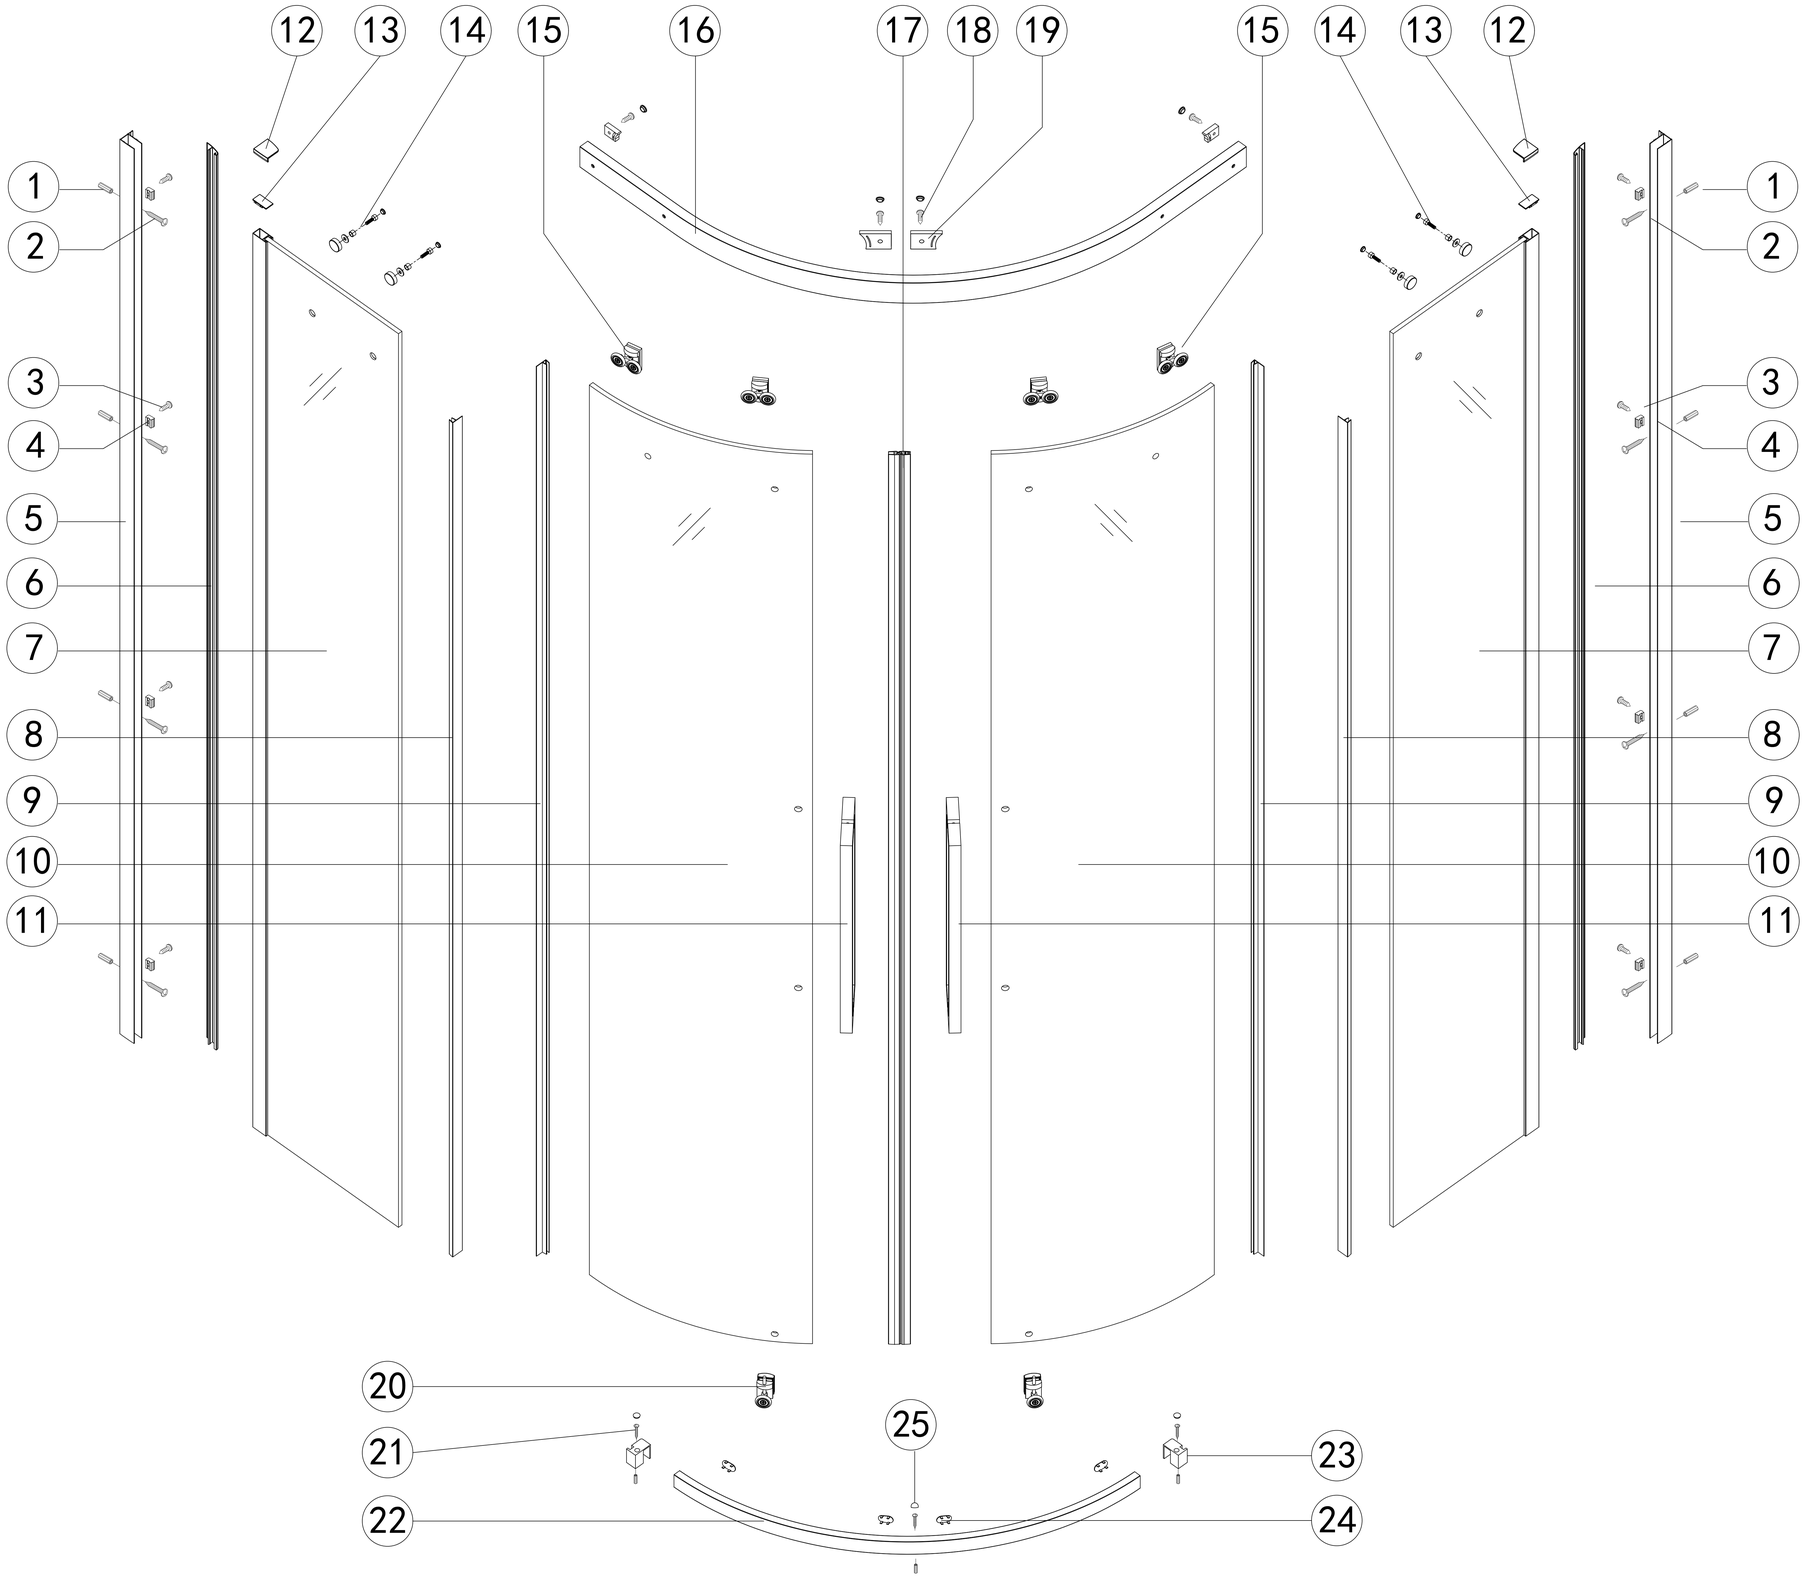
12
13
14
15
16
17
18
19
15
14
13
12
1
2
3
4
5
6
7
8
9
10
11
1
2
3
4
5
6
7
8
9
10
11
20
21
22
25
23
24

1  D6x30 11Pcs	2  ST4X30 9Pcs	3 ST4X12 8Pcs	4  CRF-6Y01 8Pcs	5  CWE-B01 2Pcs	6  CWE-B02 2Pcs	7 2Pcs	8 1865mm  CWE-J06 2Pcs	9 1985mm  CWE-J07 2Pcs
10 2Pcs	11  CWE-D05 2Pcs	12 L R  CWE-S01 2Pcs	13  CWE-S03 2Pcs	14  CWE-D12 4Pcs	15  CWE-D09 4Pcs	16  CWE-B08-S 1Pcs	17 A+B  CWE-J08 1Pair	18  ST4X8 4Pcs
19 L R  CWE-S05 4Pcs	20  CWE-D10 2Pcs	21  ST4X35 2Pcs	22 CWE-B09-S 1Pcs	23 L R  CWE-D11 2Pcs	24  CRF-6Y05 4Pcs	25 CWE-S07 1Pcs		

Tools:

Please report any missing parts or damage to your supplier within 10 working days and before installation.

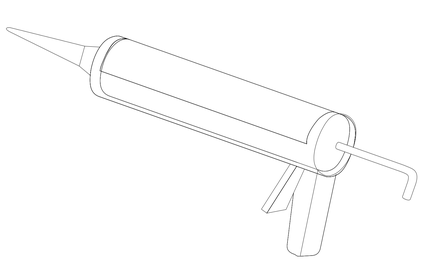


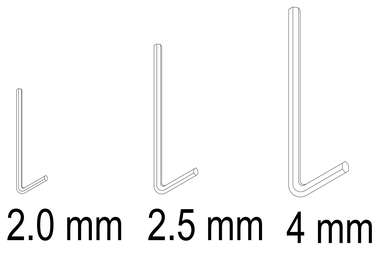

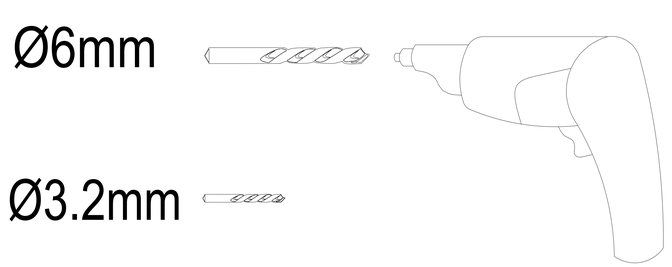






1L

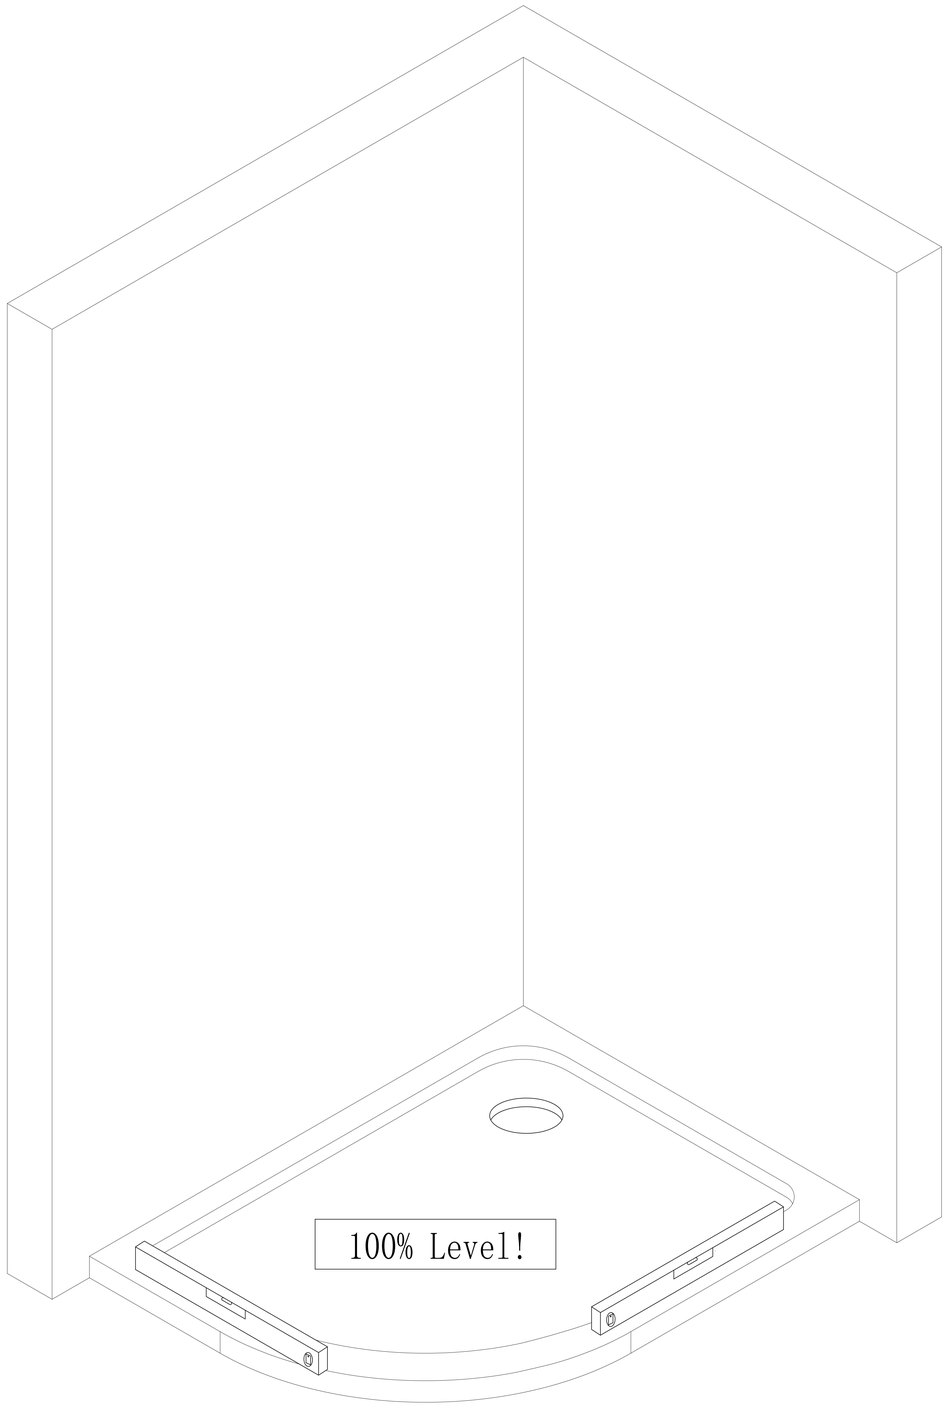

Check tray is level

1R

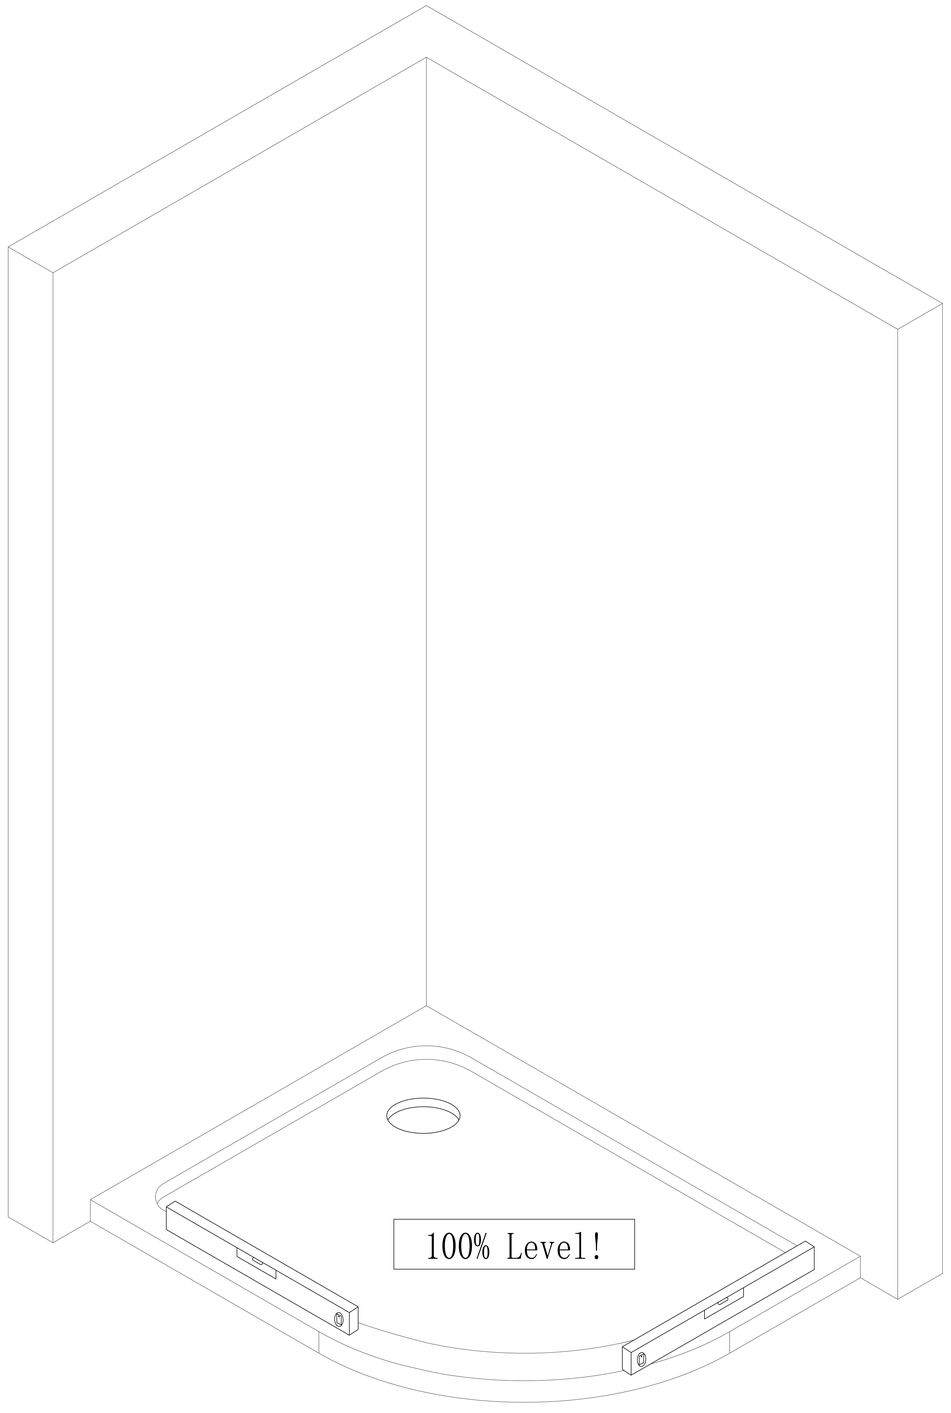

Check tray is level

2L

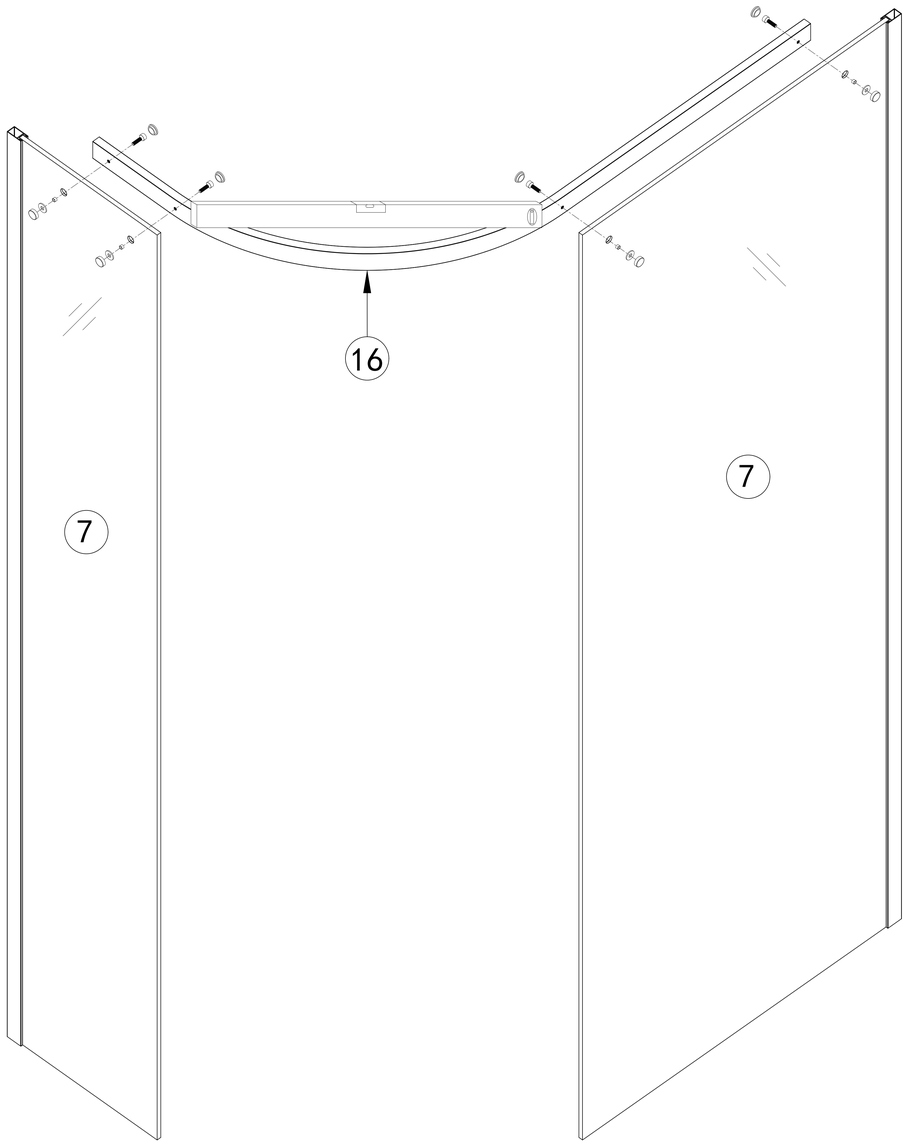

Connect top support bar (16) to fixed glass panels (7) with bolts (14).

2-1

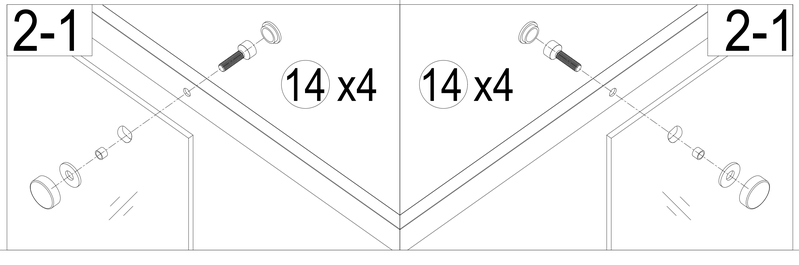

2-1

2R

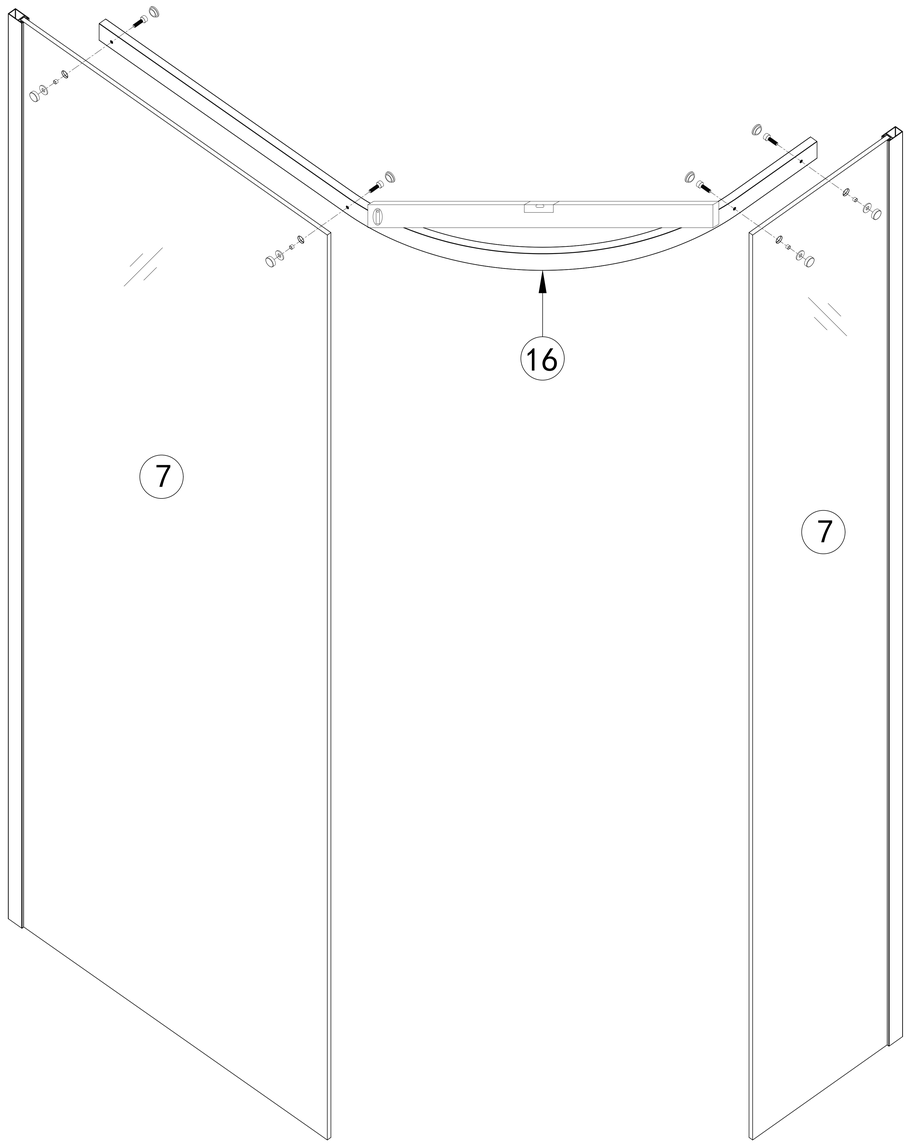

Connect top support bar (16) to fixed glass panels (7) with bolts (14).

3L

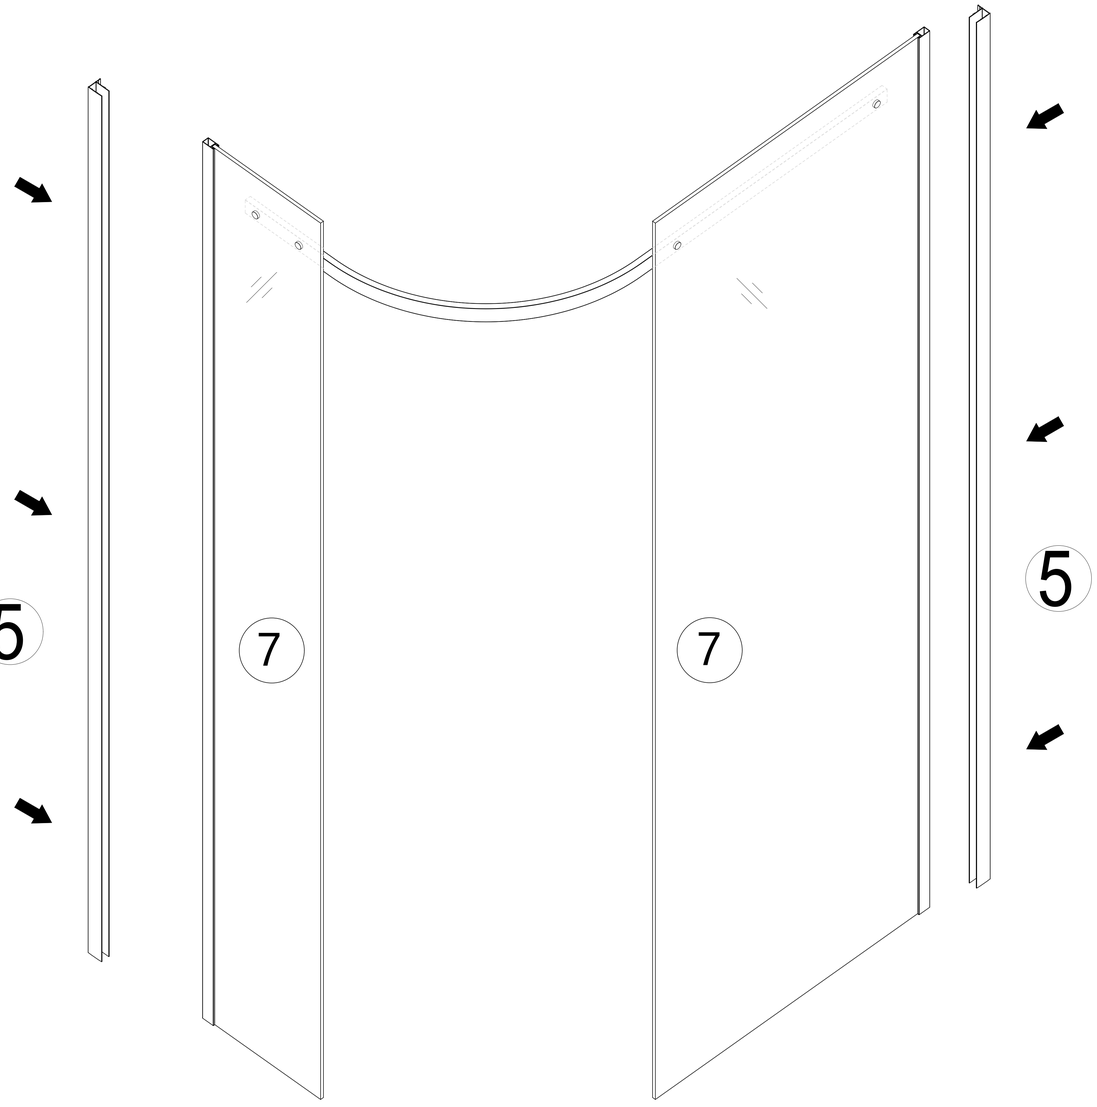

3R

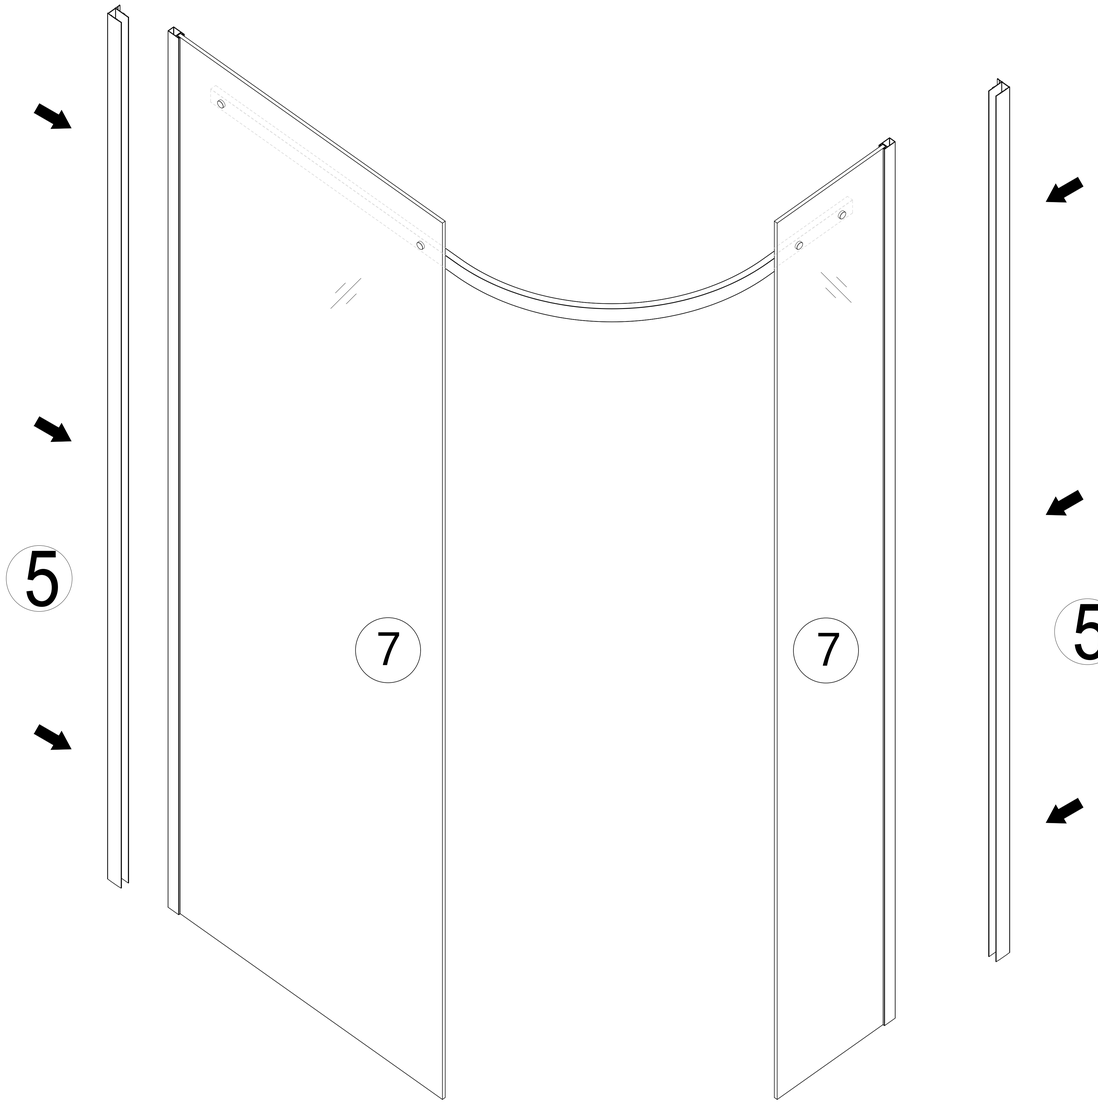

3-1

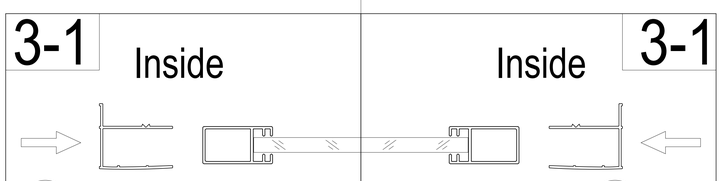

3-1

3-2

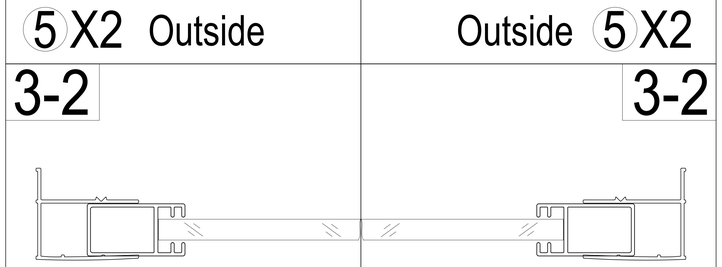

3-2

4L

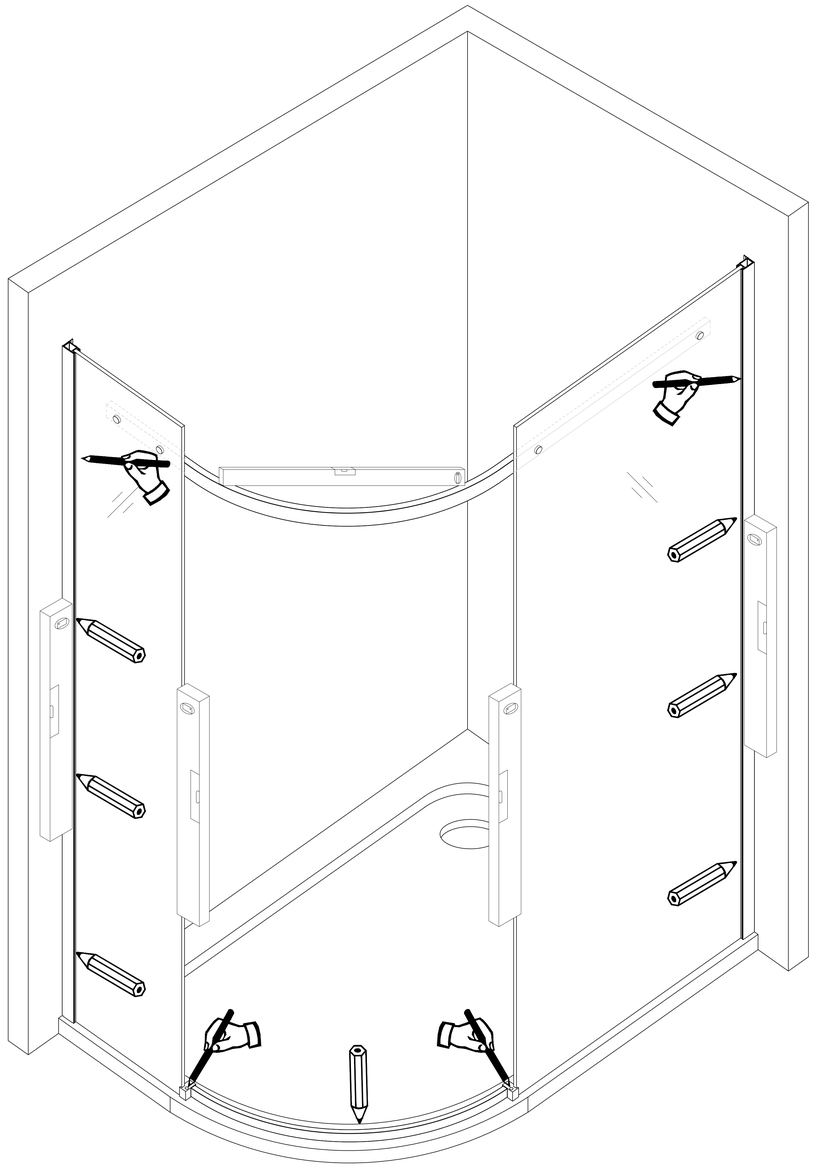

Lift fixed panels with bar attached onto tray for best fit and mark position for wall profiles and bottom rail & rail fixtures

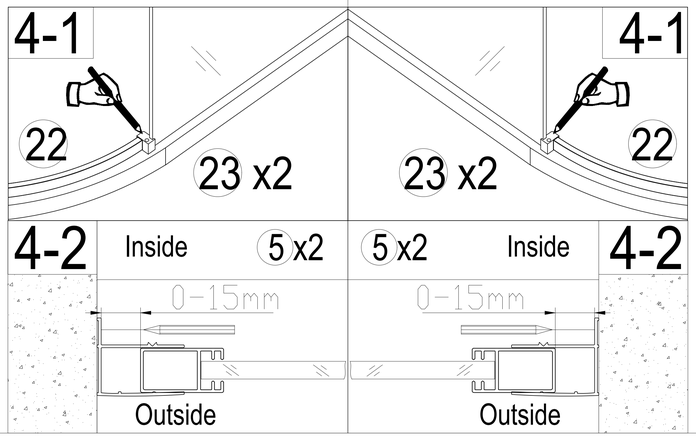

4R

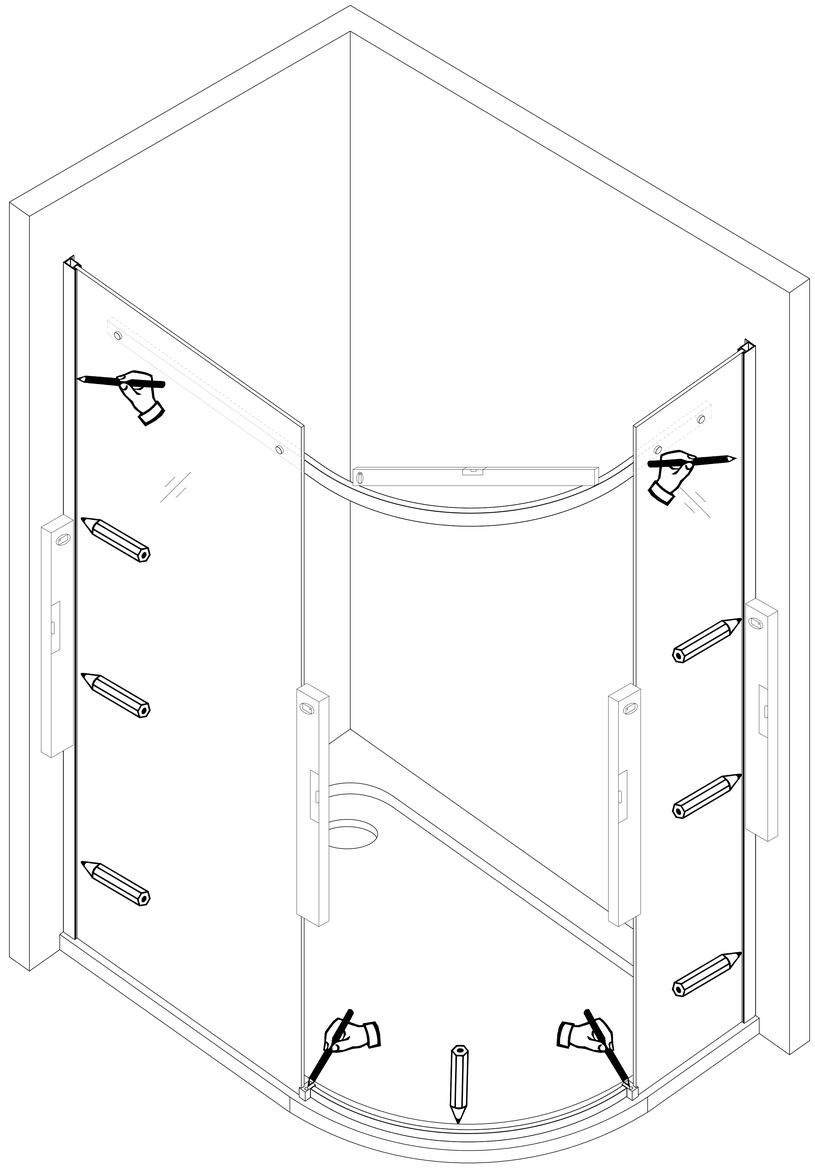

Lift fixed panels with bar attached onto tray for best fit and mark position for wall profiles and bottom rail & rail fixtures

5L

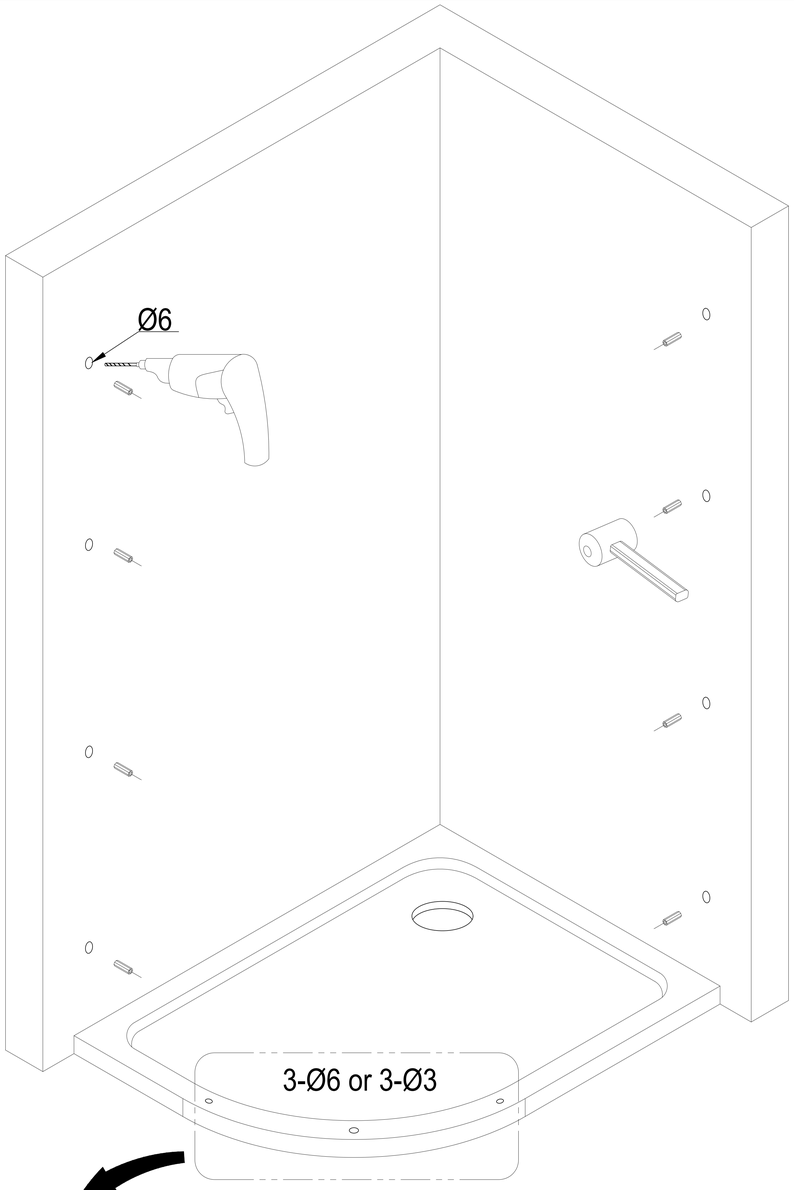



If the shower enclosure installed with a tray, please make holes in the tray with Φ3mm drill and wall plugs are not required;



If not, please make holes in the floor with Φ6mm drill and wall plugs are required;

Installing wall profiles - checking levels

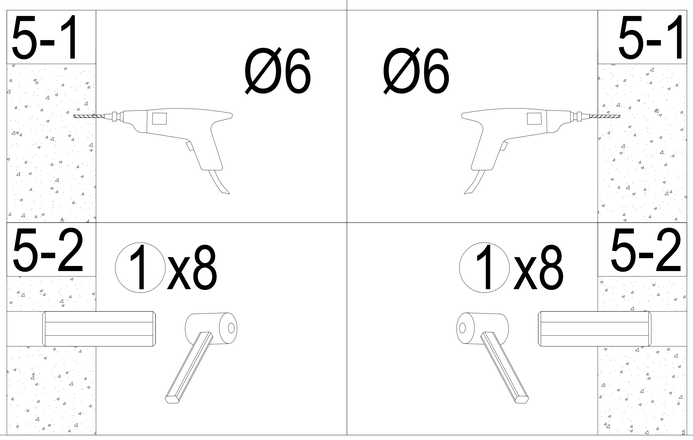

5R

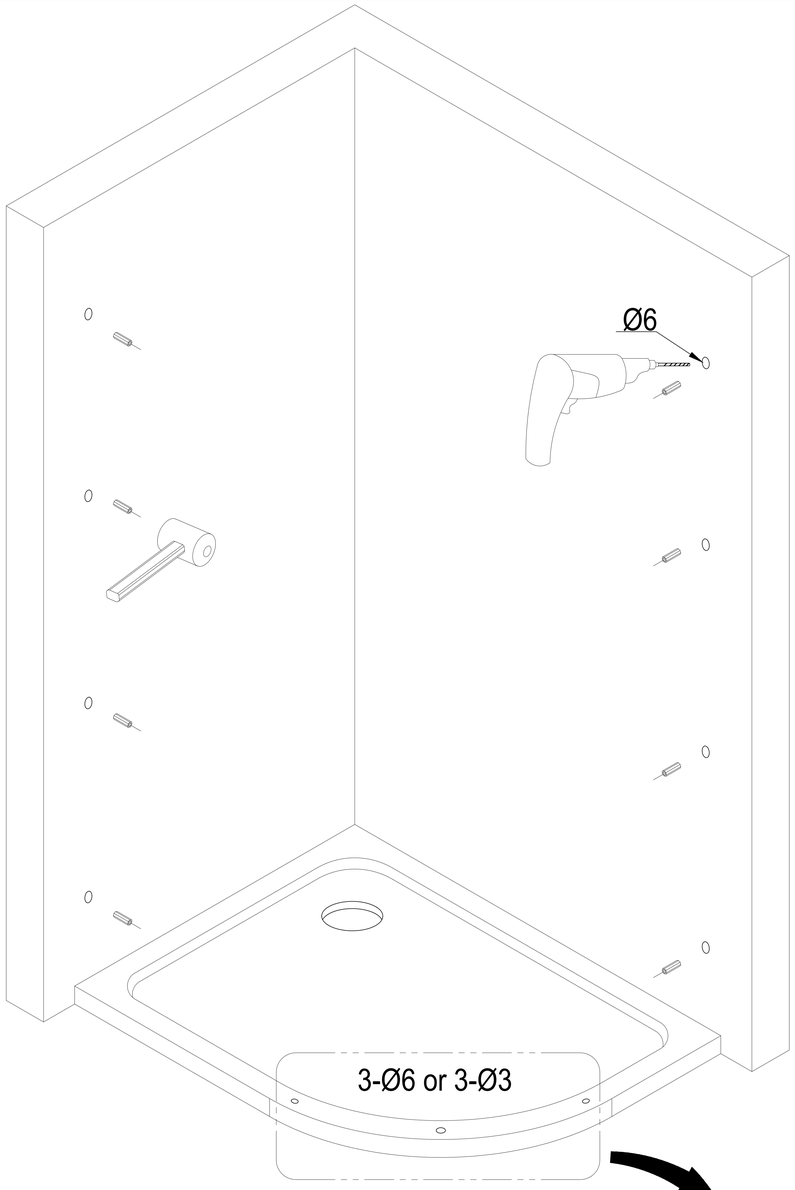

If the shower enclosure installed with a tray, please make holes in the tray with Φ3mm drill and wall plugs are not required;



If not, please make holes in the floor with Φ6mm drill and wall plugs are required;



Installing wall profiles - checking levels

6L

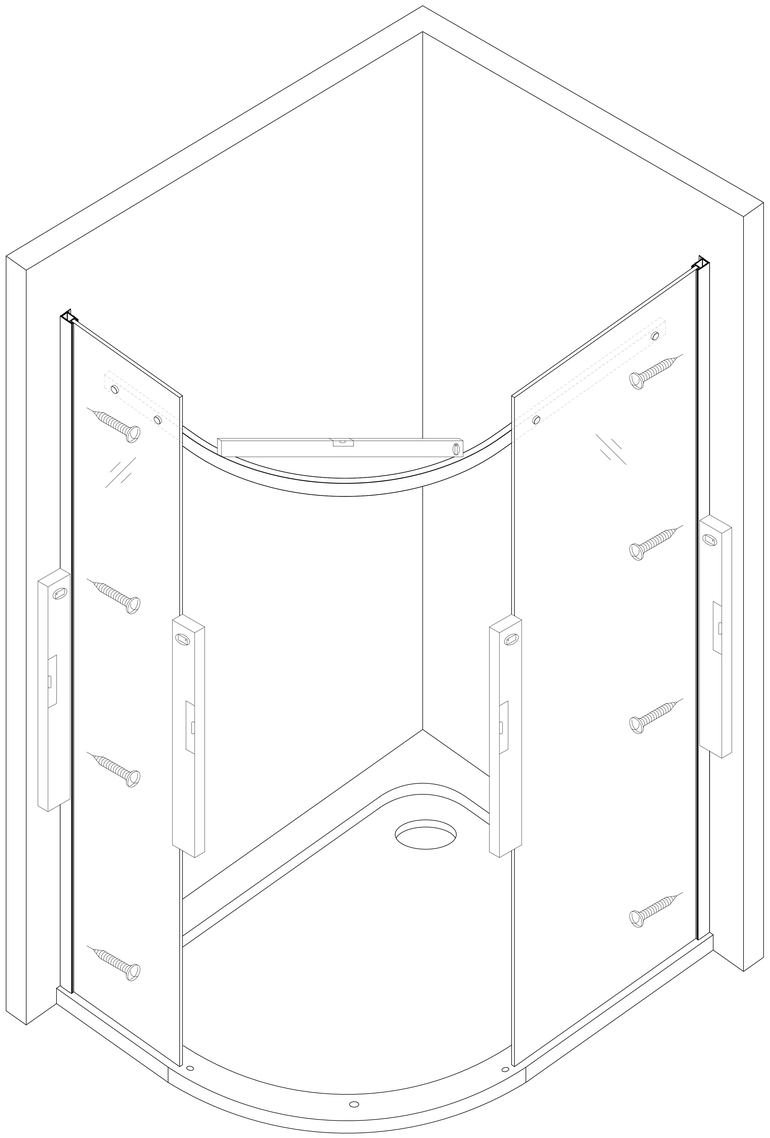

6R

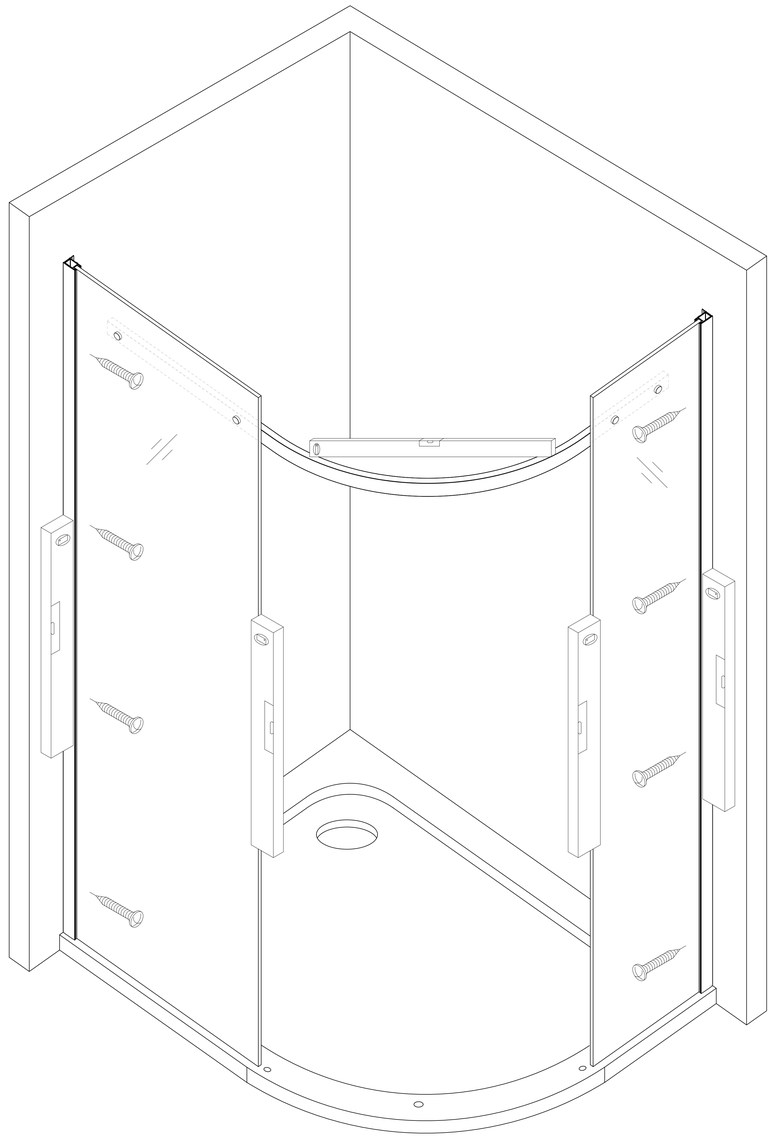

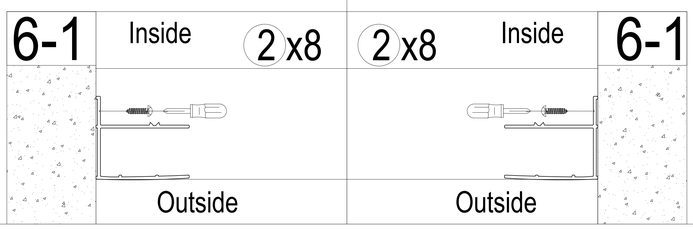

7L

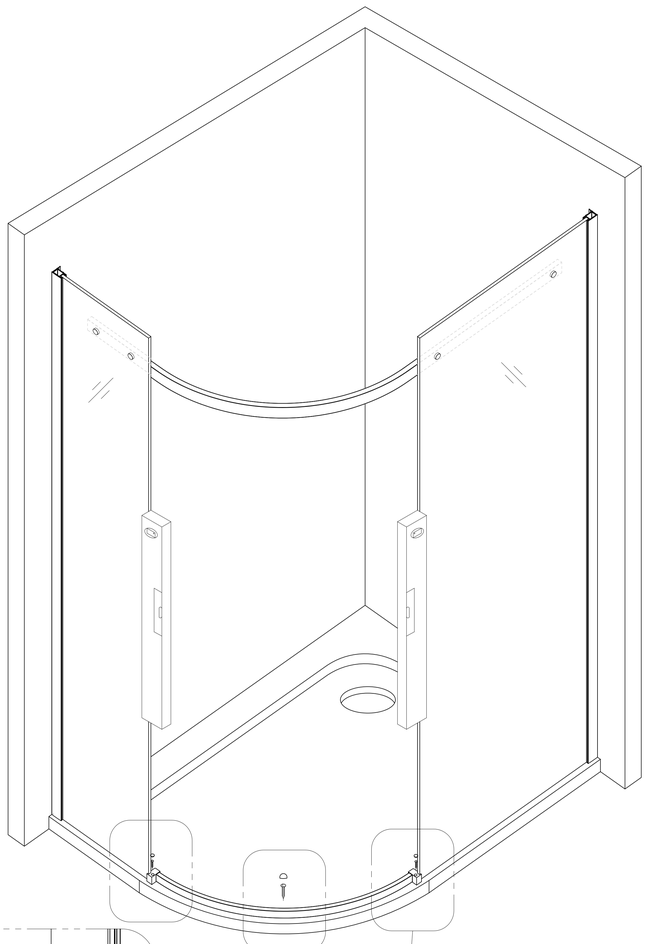

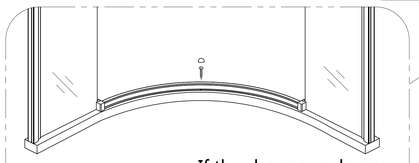

02 x1
25 x1

If the shower enclosure installed with a tray, please make holes in the tray with Φ3mm drill and wall plugs are not required;

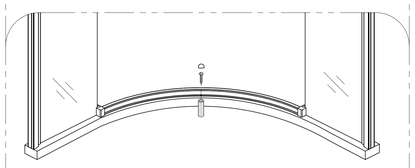

02 x1
25 x1
01 x1

If not, please make holes in the floor with Φ6mm drill and wall plugs are required;



If the shower enclosure installed with a tray, please make holes in the tray with Φ3mm drill and wall plugs are not required;



If not, please make holes in the floor with Φ6mm drill and wall plugs are required;

Install panels + frame ensuring fixing for bottom frame are screwed to the tray.

7R

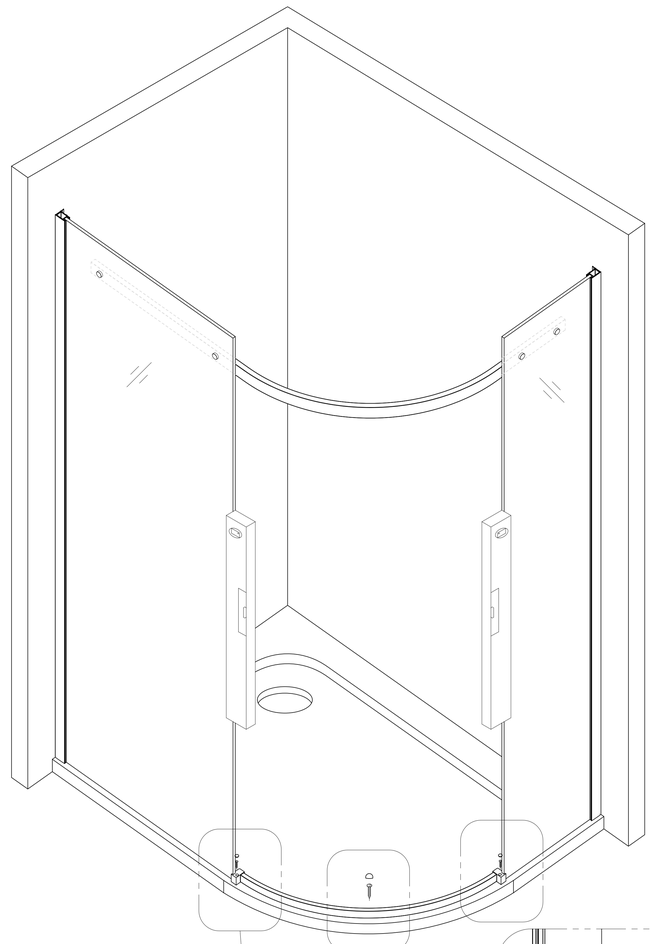

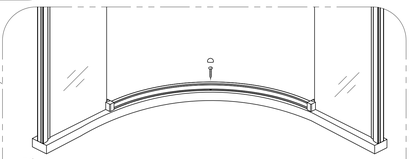

If the shower enclosure installed with a tray, please make holes in the tray with Φ3mm drill and wall plugs are not required;

02 x1
25 x1

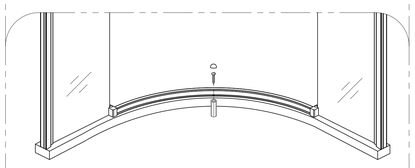

If not, please make holes in the floor with Φ6mm drill and wall plugs are required;

02 x1
25 x1
01 x1

If the shower enclosure installed with a tray, please make holes in the tray with Φ3mm drill and wall plugs are not required;



If not, please make holes in the floor with Φ6mm drill and wall plugs are required;



Install panels + frame ensuring fixing for bottom frame are screwed to the tray.

8L

Pls don't fully tighten the roller screws.



This side faces downward

15 x4

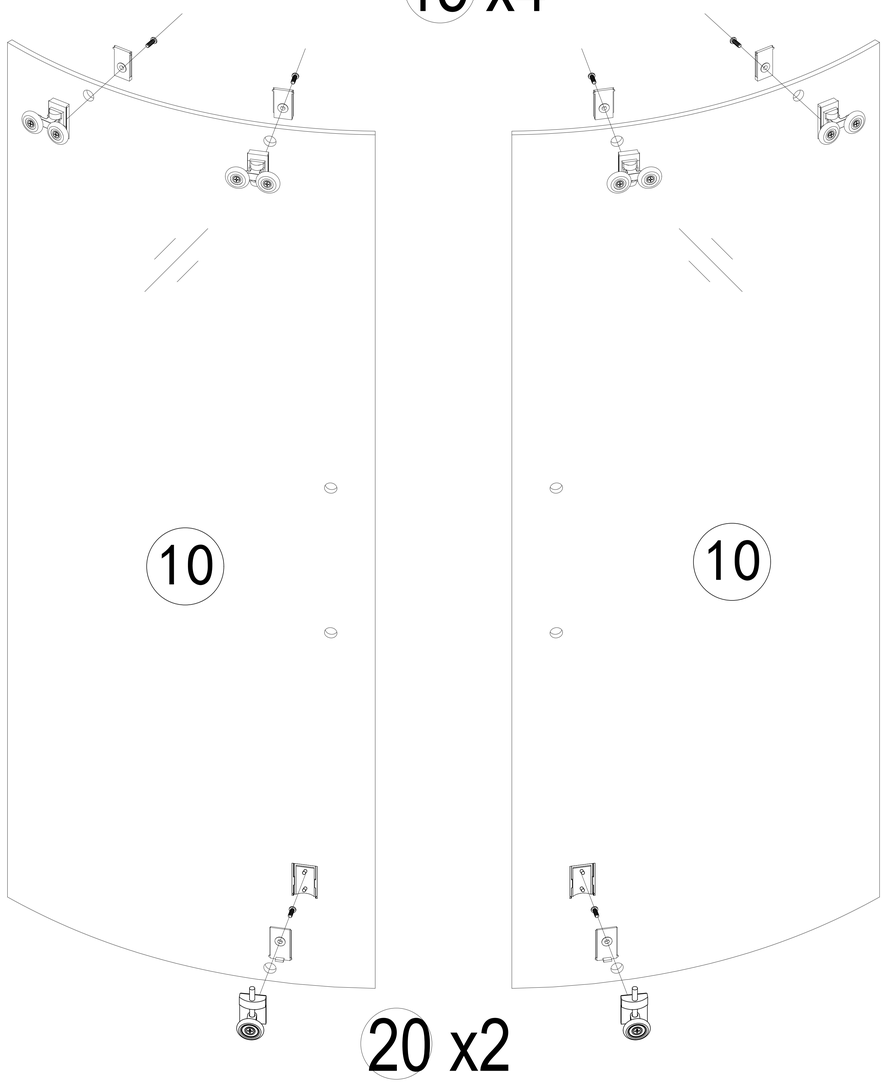

20 x2

Fit rollers to door

8R



This side faces downward

Pls don't fully tighten the roller screws.

15 x4

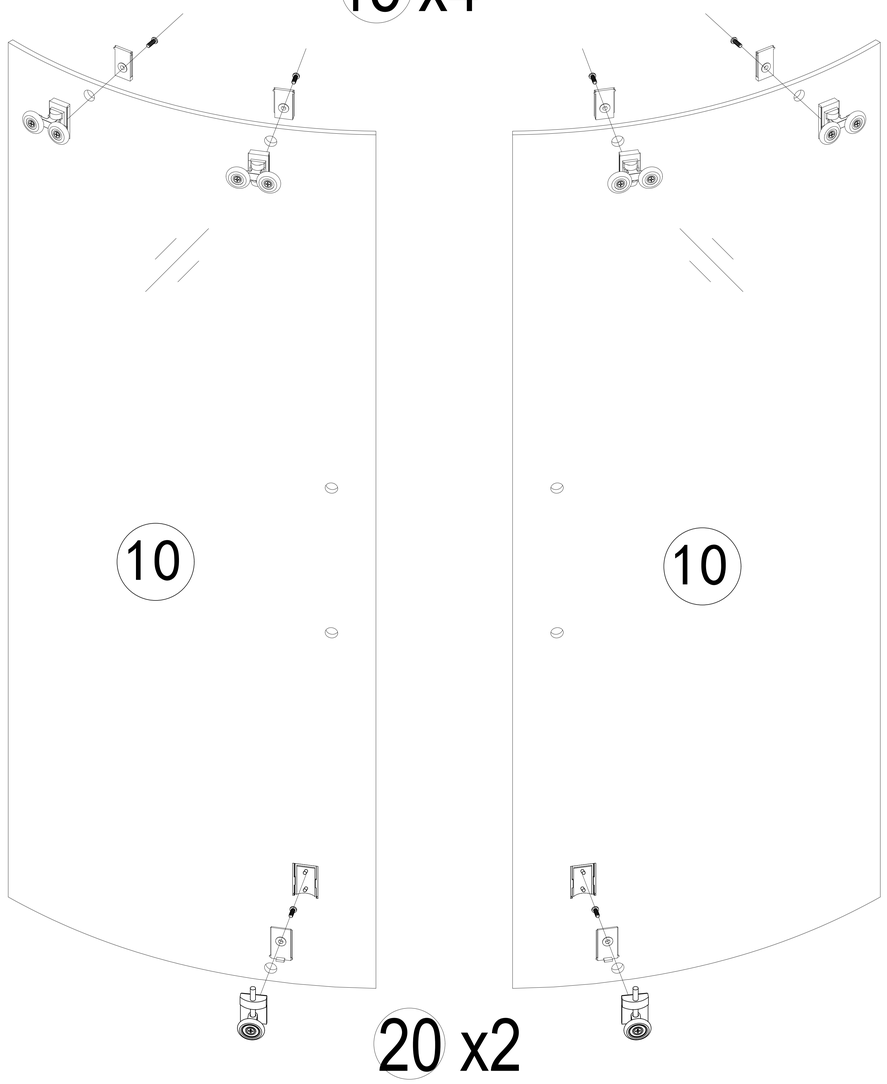

20 x2

Fit rollers to door

9L

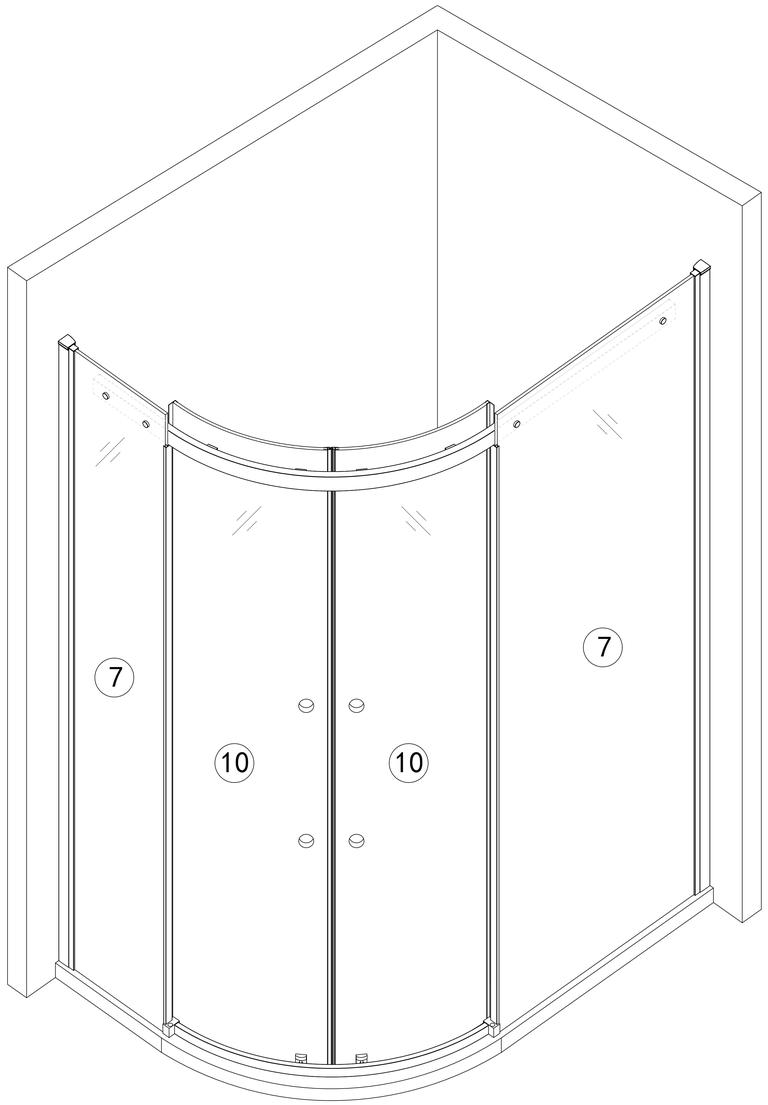

9R

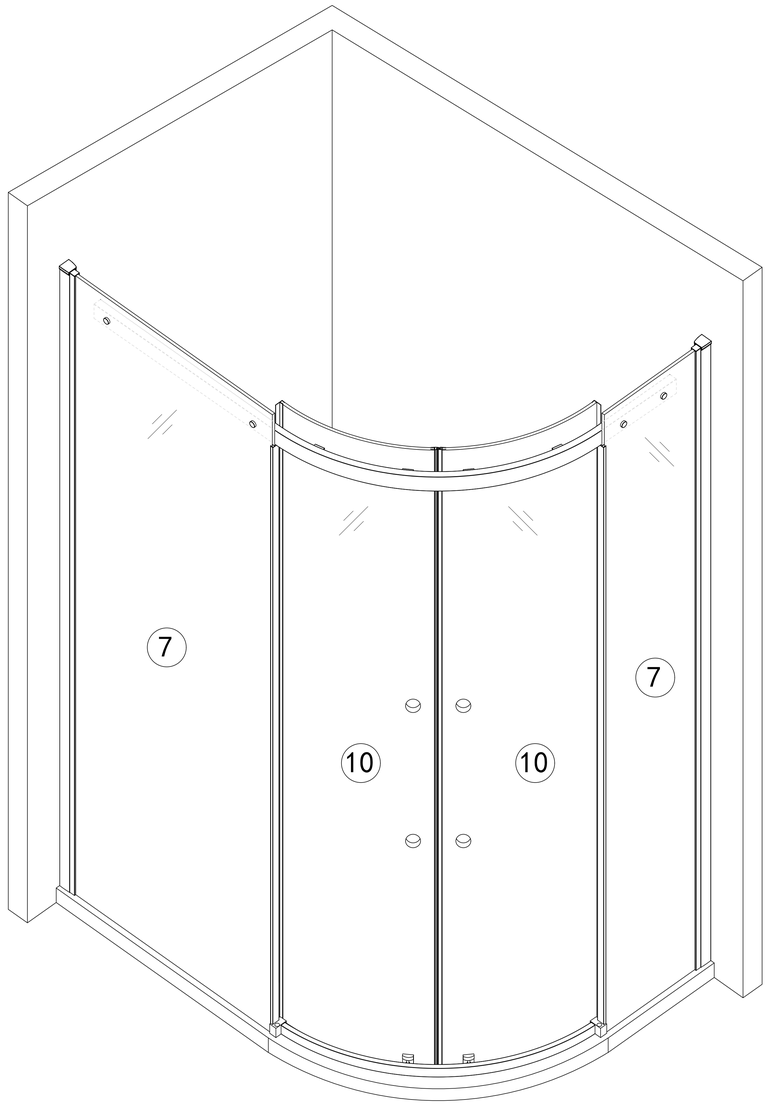

9-1

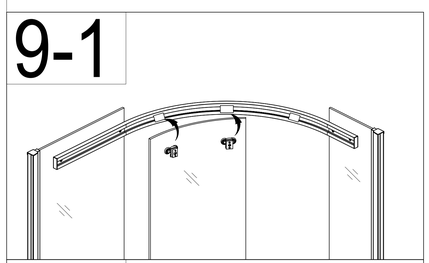

9-2

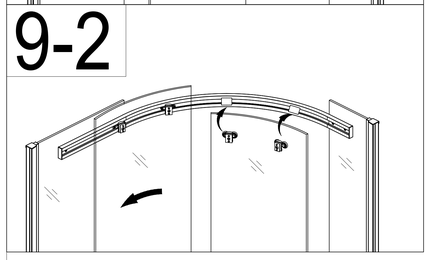



9-3

Pls make sure the rollers are level before well tightened the screws.

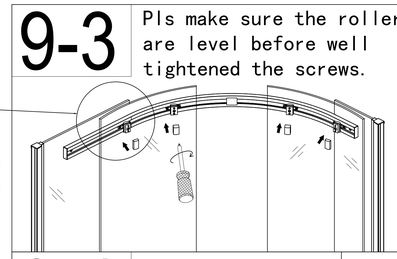

9-4

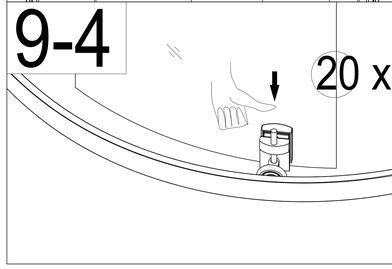

Pls make sure the rollers are level before well tightened the screws.

9-3

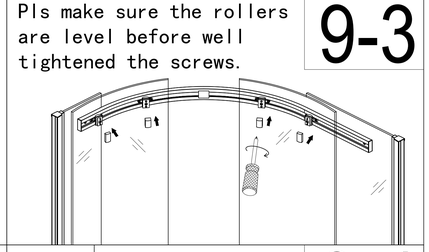

9-4

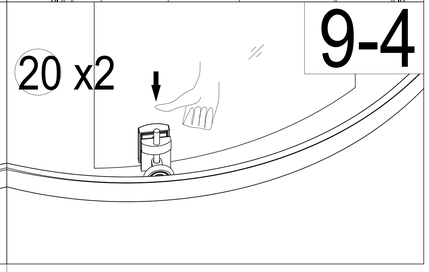

9-1

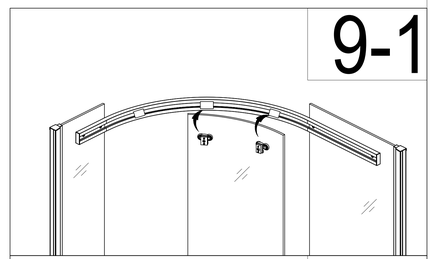

9-2

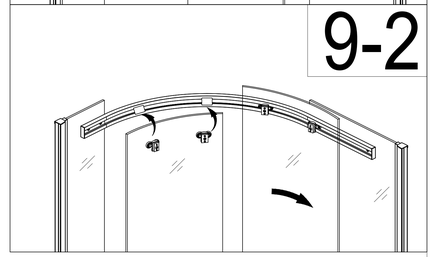

Fit doors onto frame

Fit doors onto frame

10L

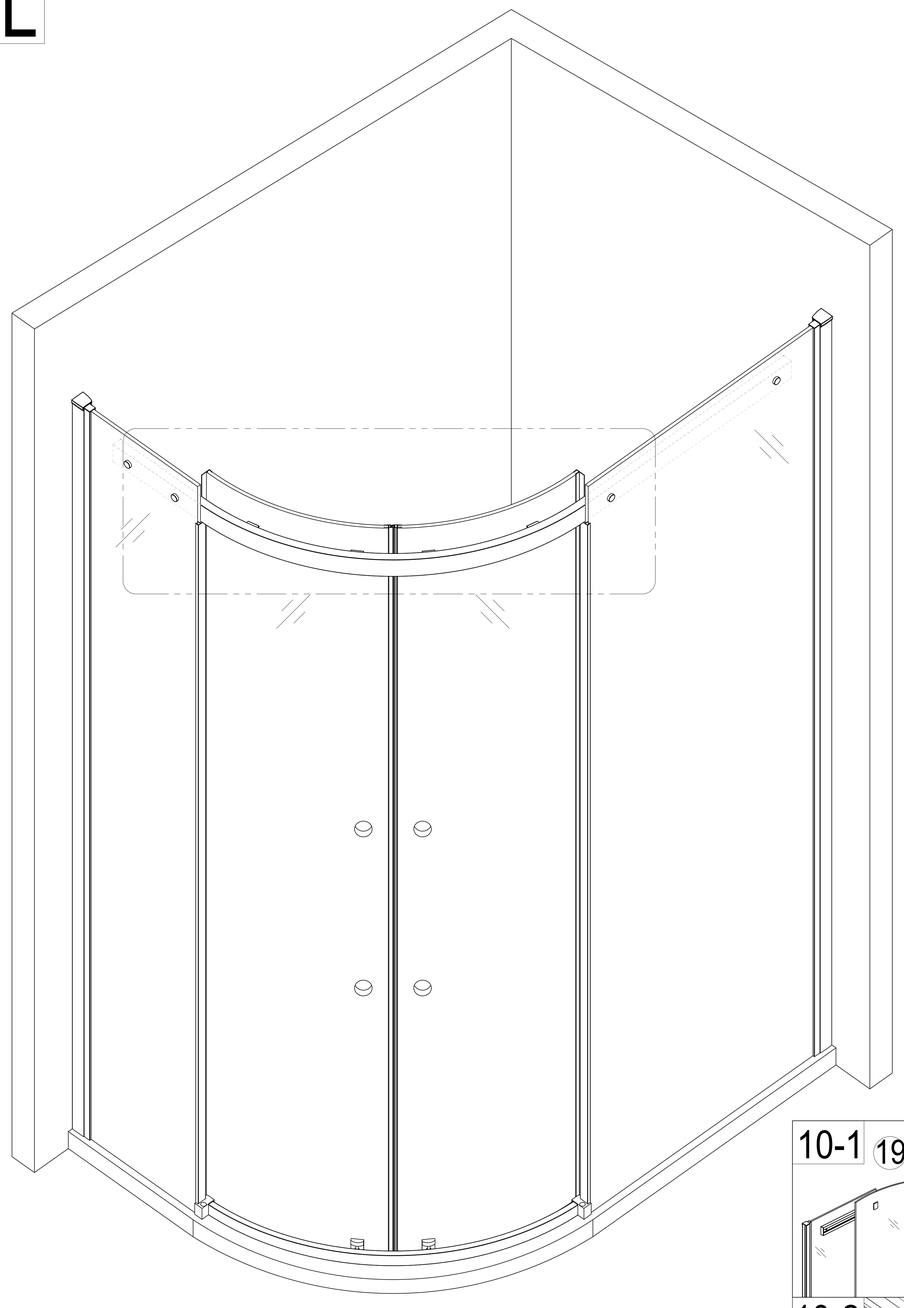

10R

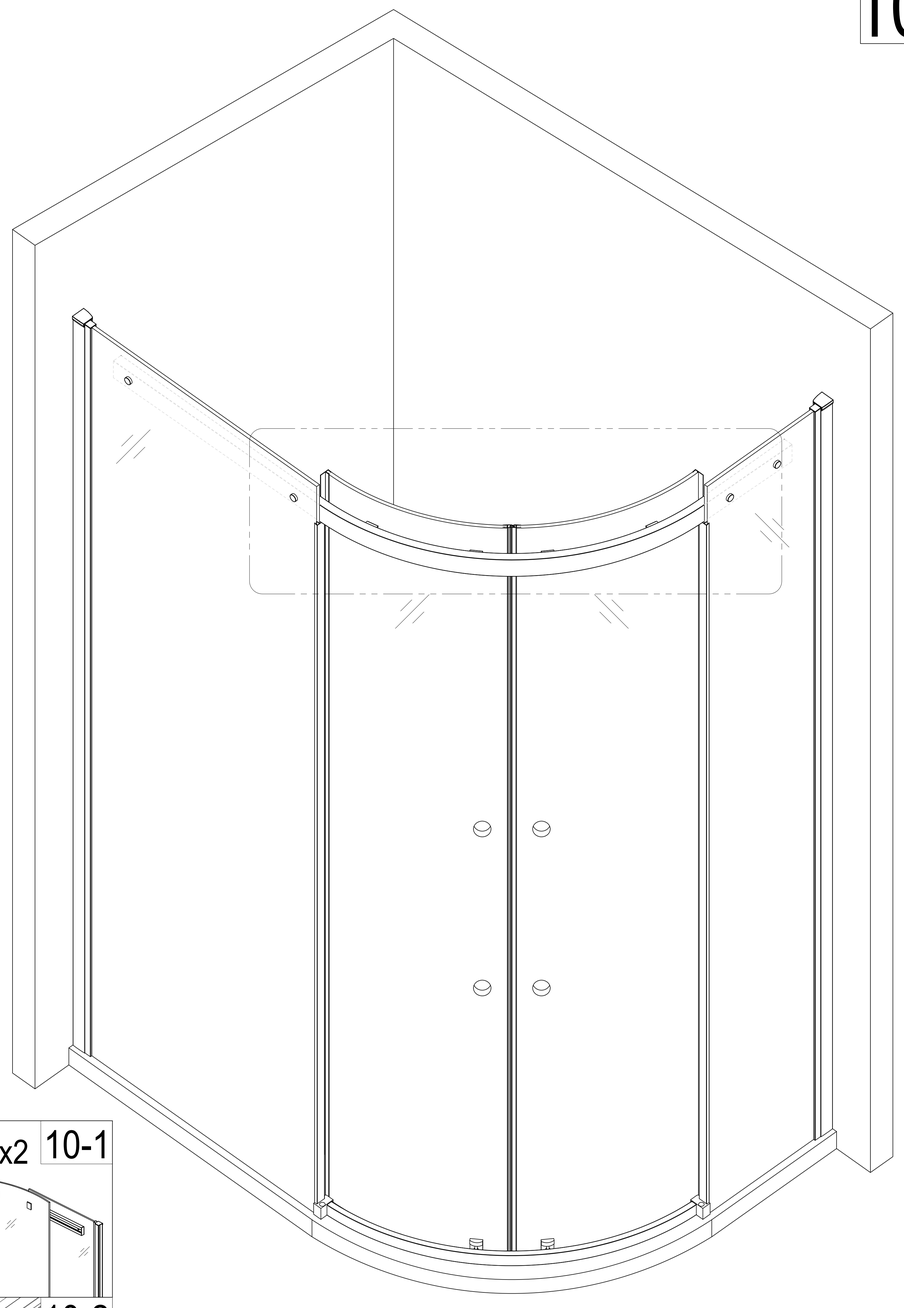

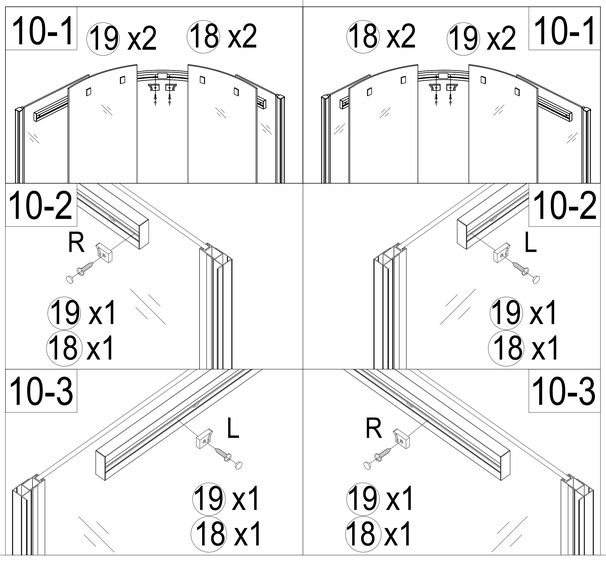

Add door stops to top rail

Add door stops to top rail

11L

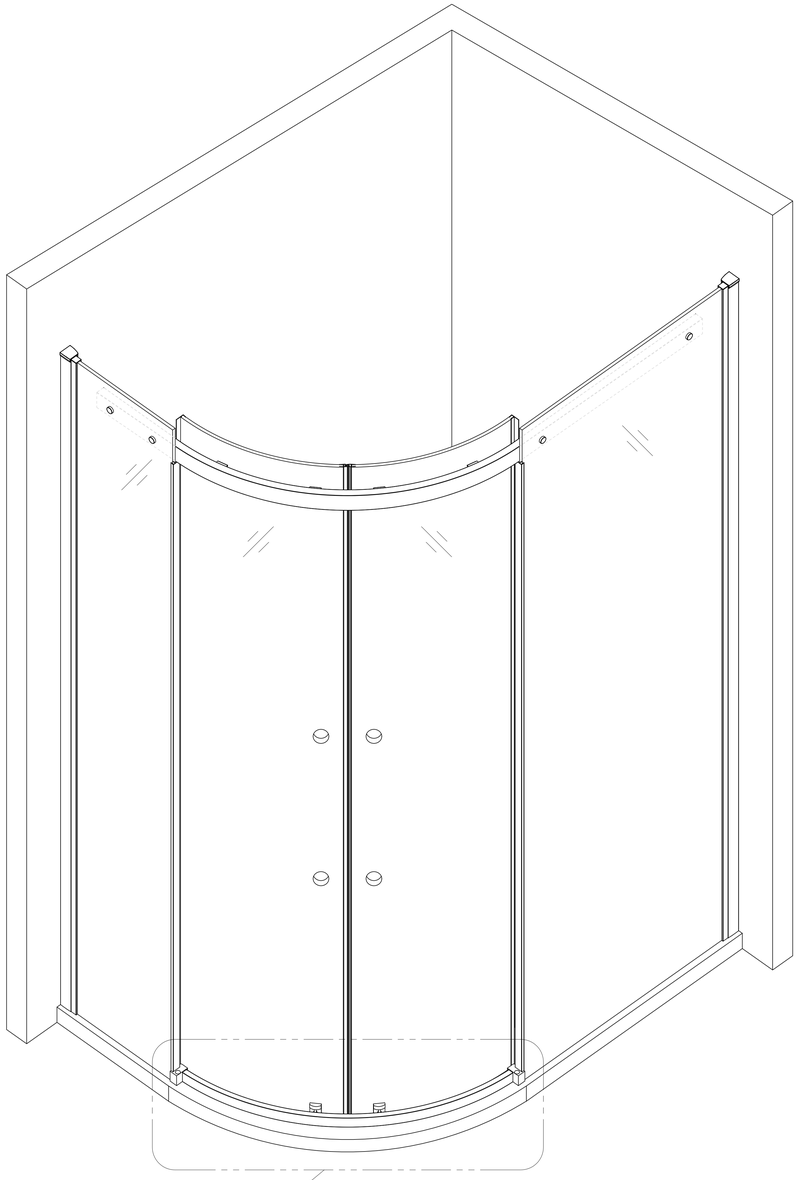

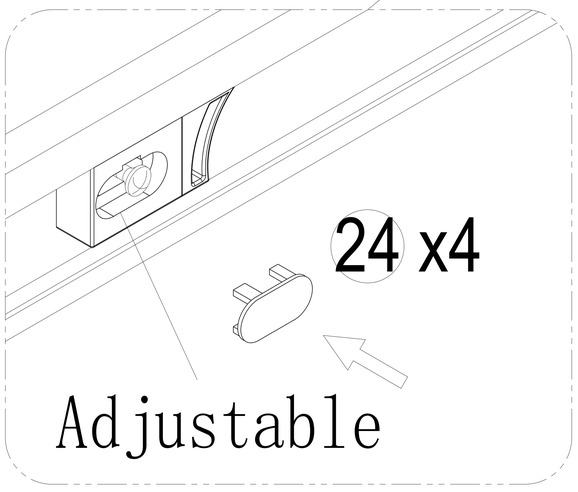

11R

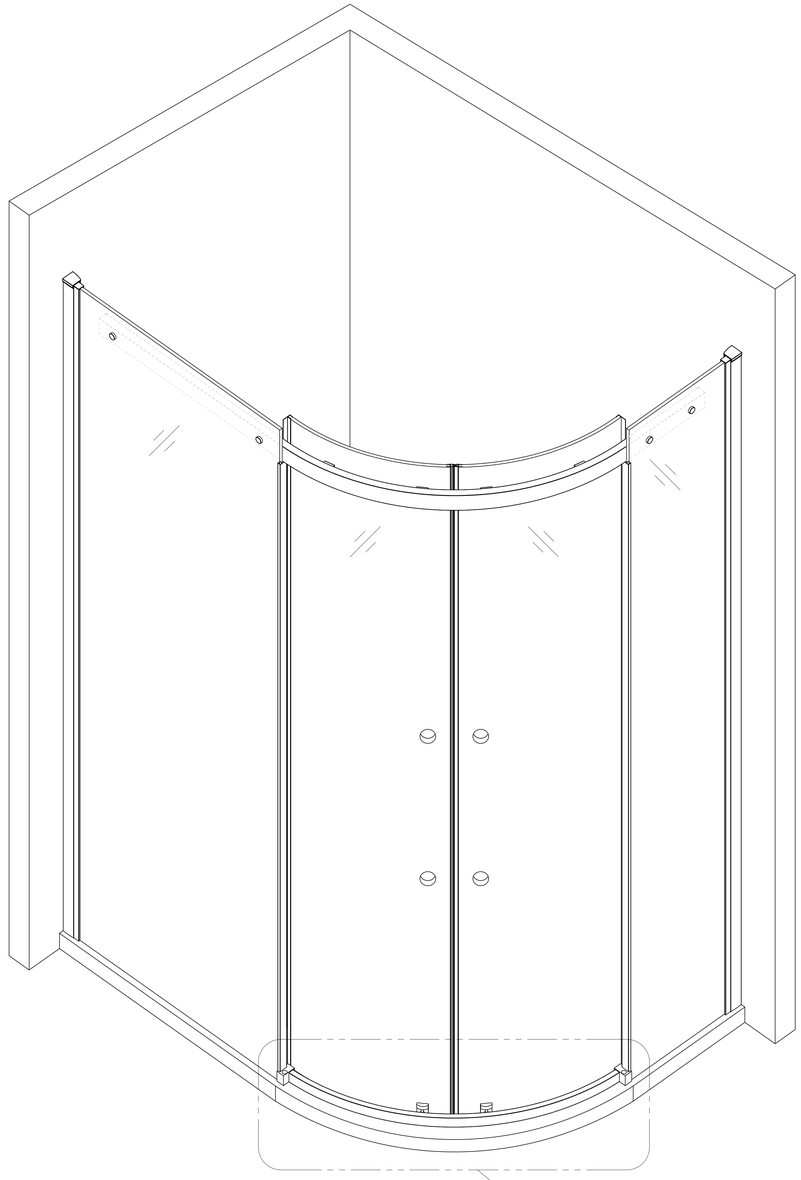

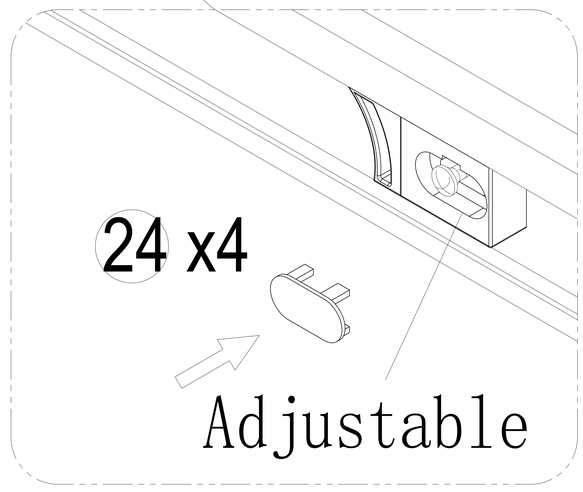

12L

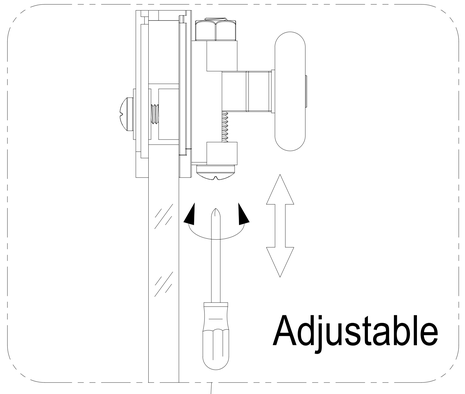

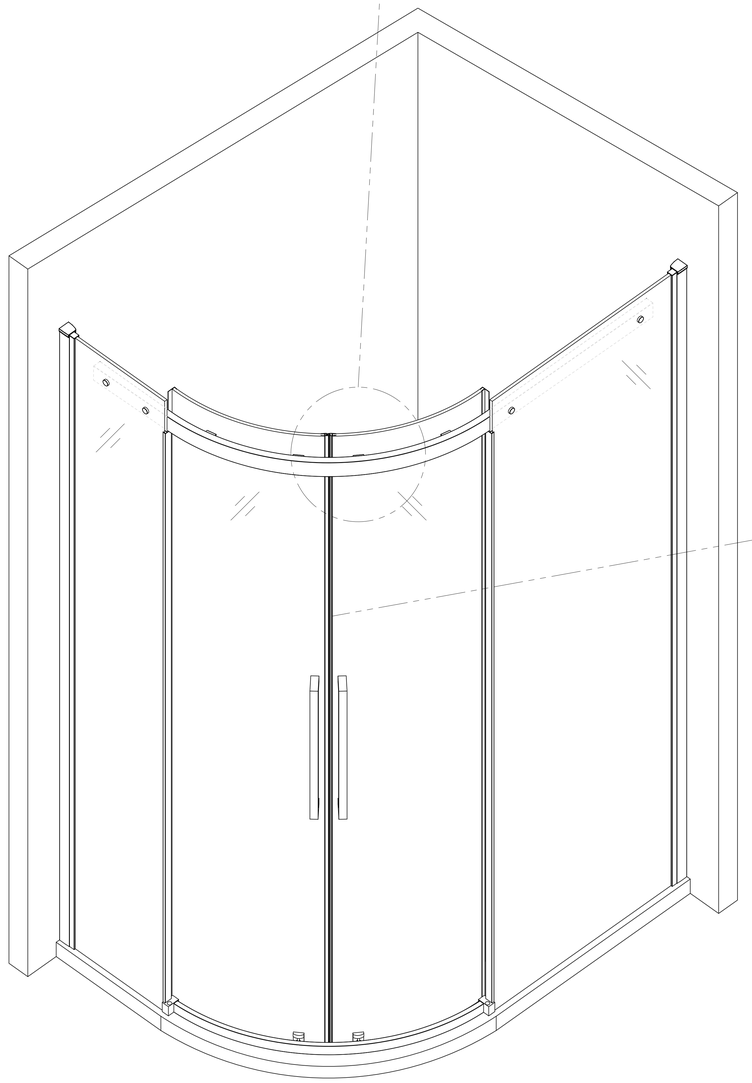

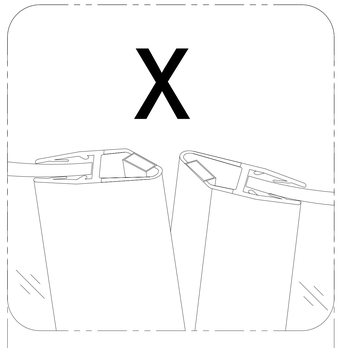

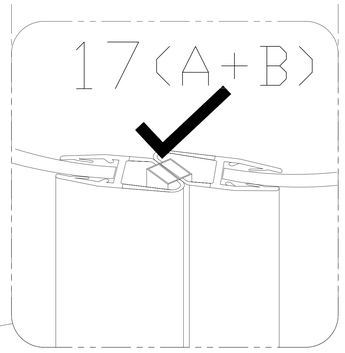

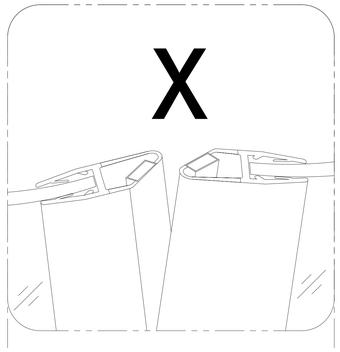

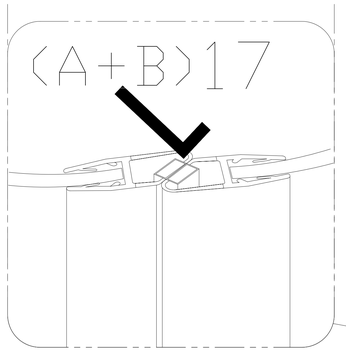

12R

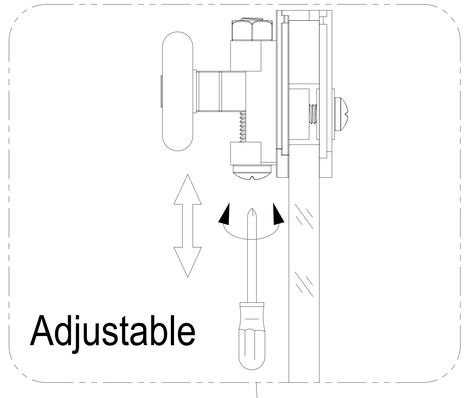

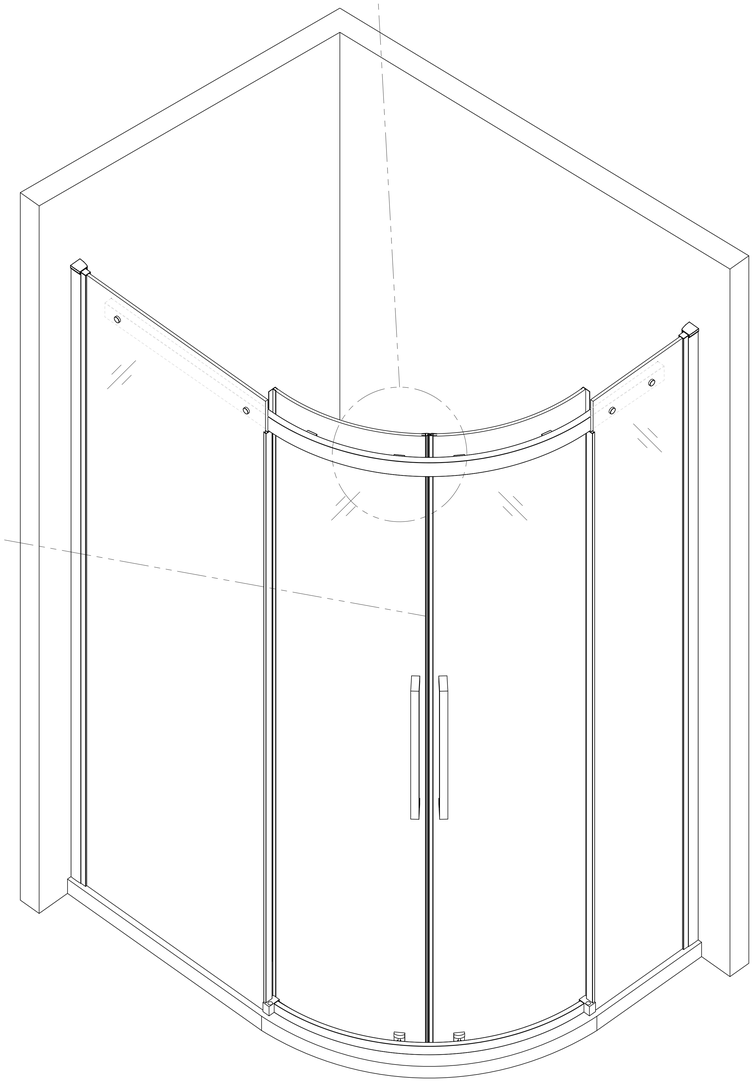

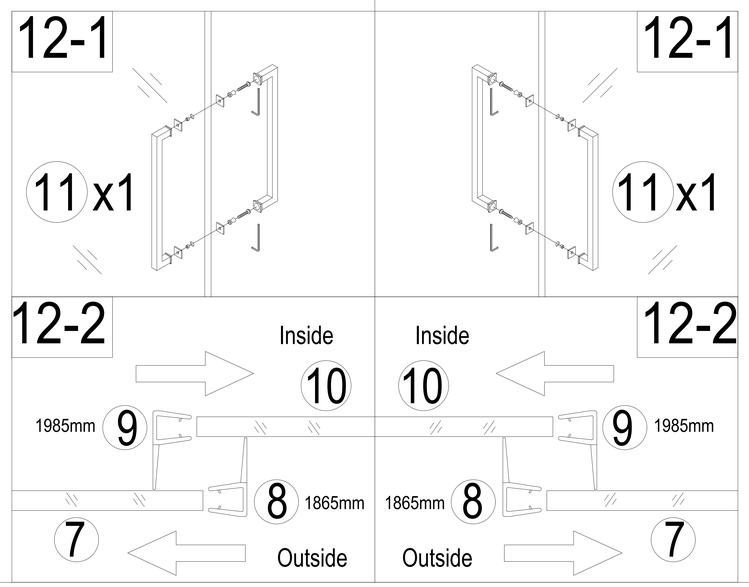

Fit magnetic seals and handles

Fit magnetic seals and handles

13L

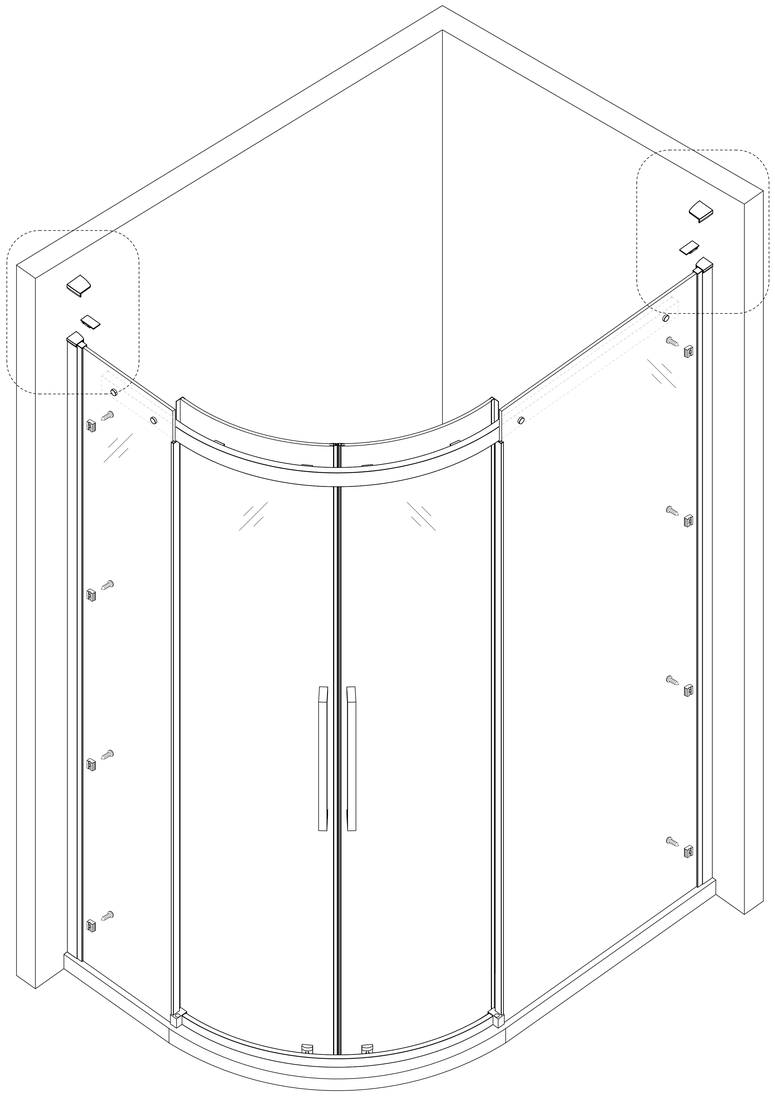

13R

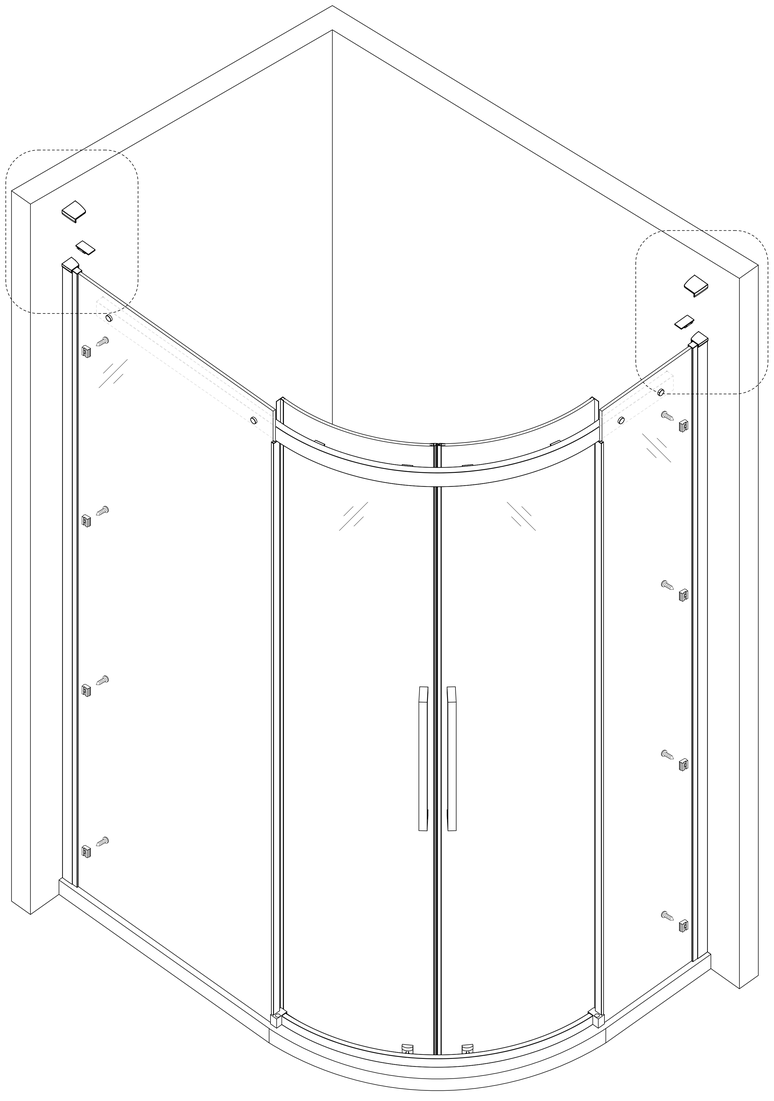

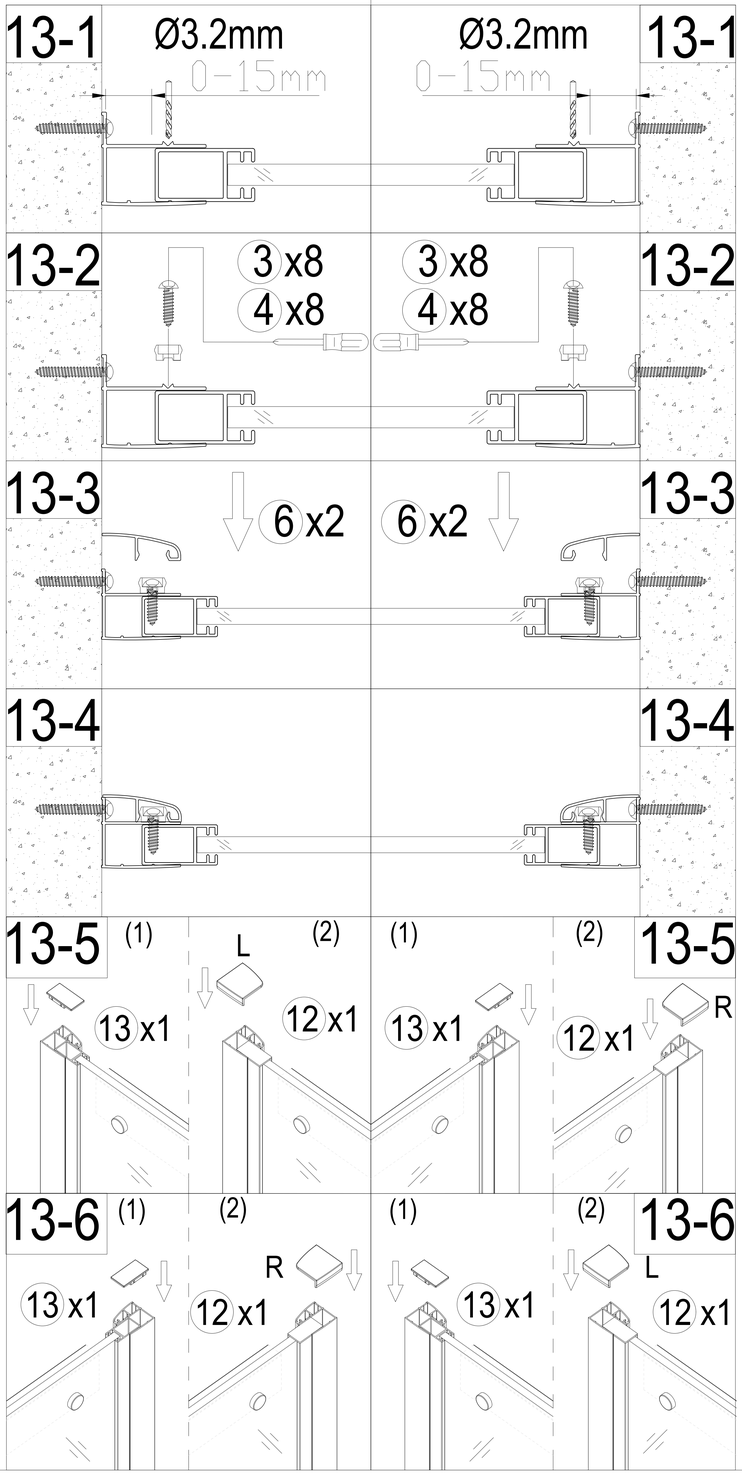

Install profile cover caps

Install profile cover caps

Care Instructions:

Do not use your shower enclosure within 24 hours of assembly . Do not use caustic cleaning products or abrasive material when cleaning your shower enclosure.

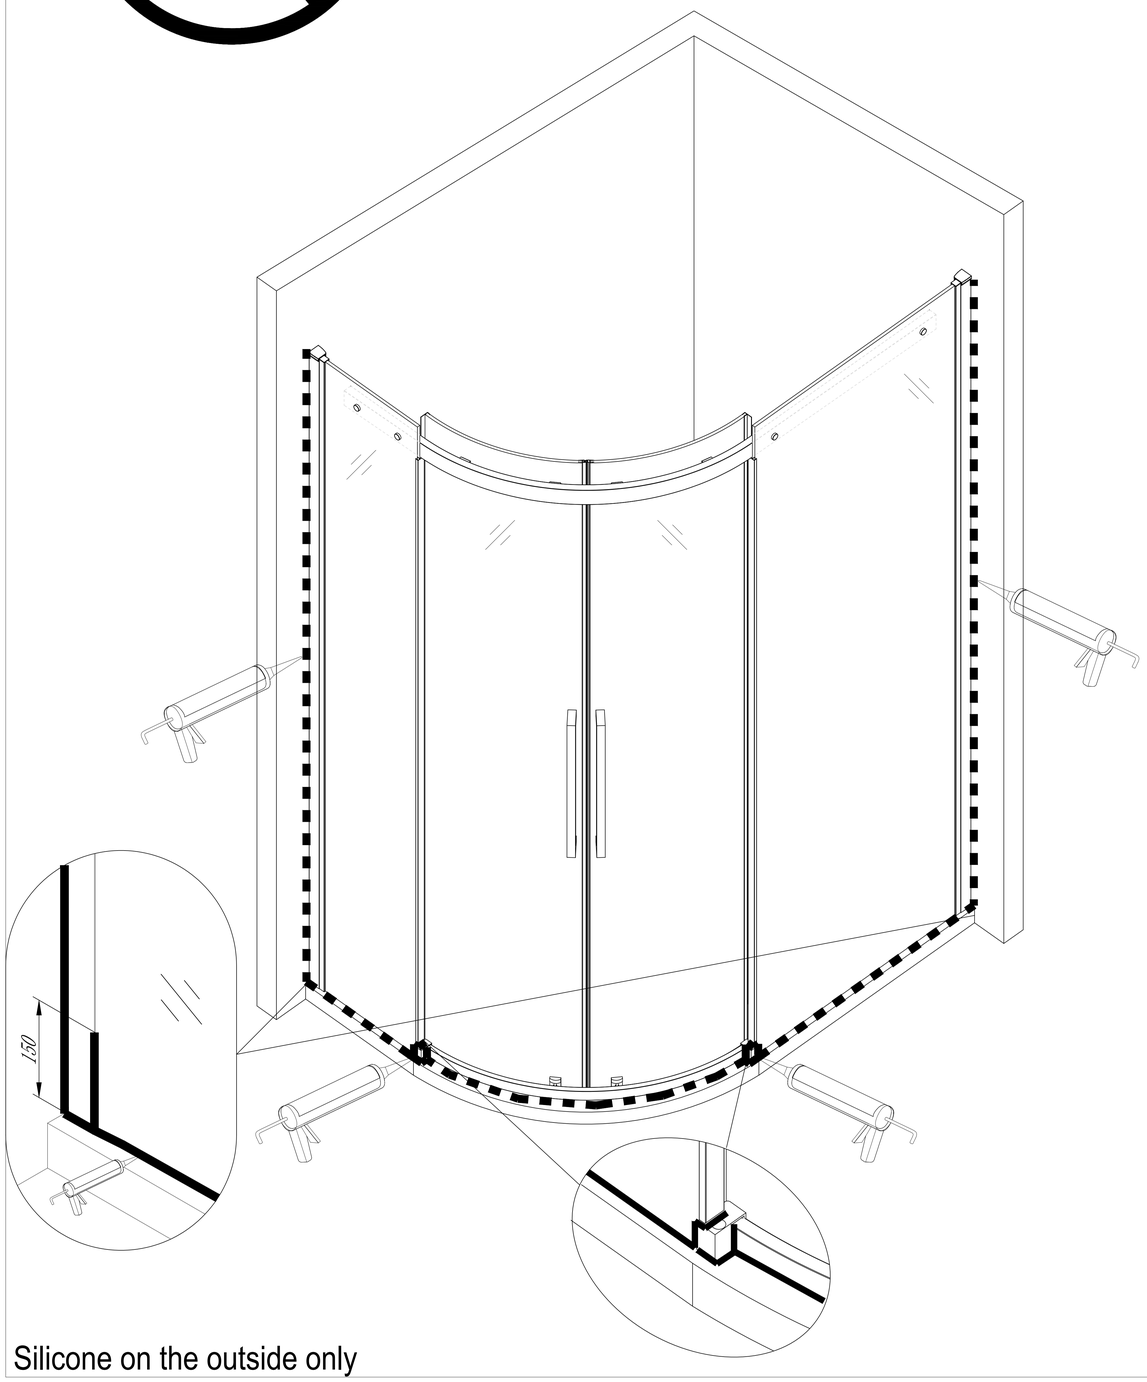

Silicone on the outside only

Care Instructions:

Do not use your shower enclosure within 24 hours of assembly . Do not use caustic cleaning products or abrasive material when cleaning your shower enclosure.

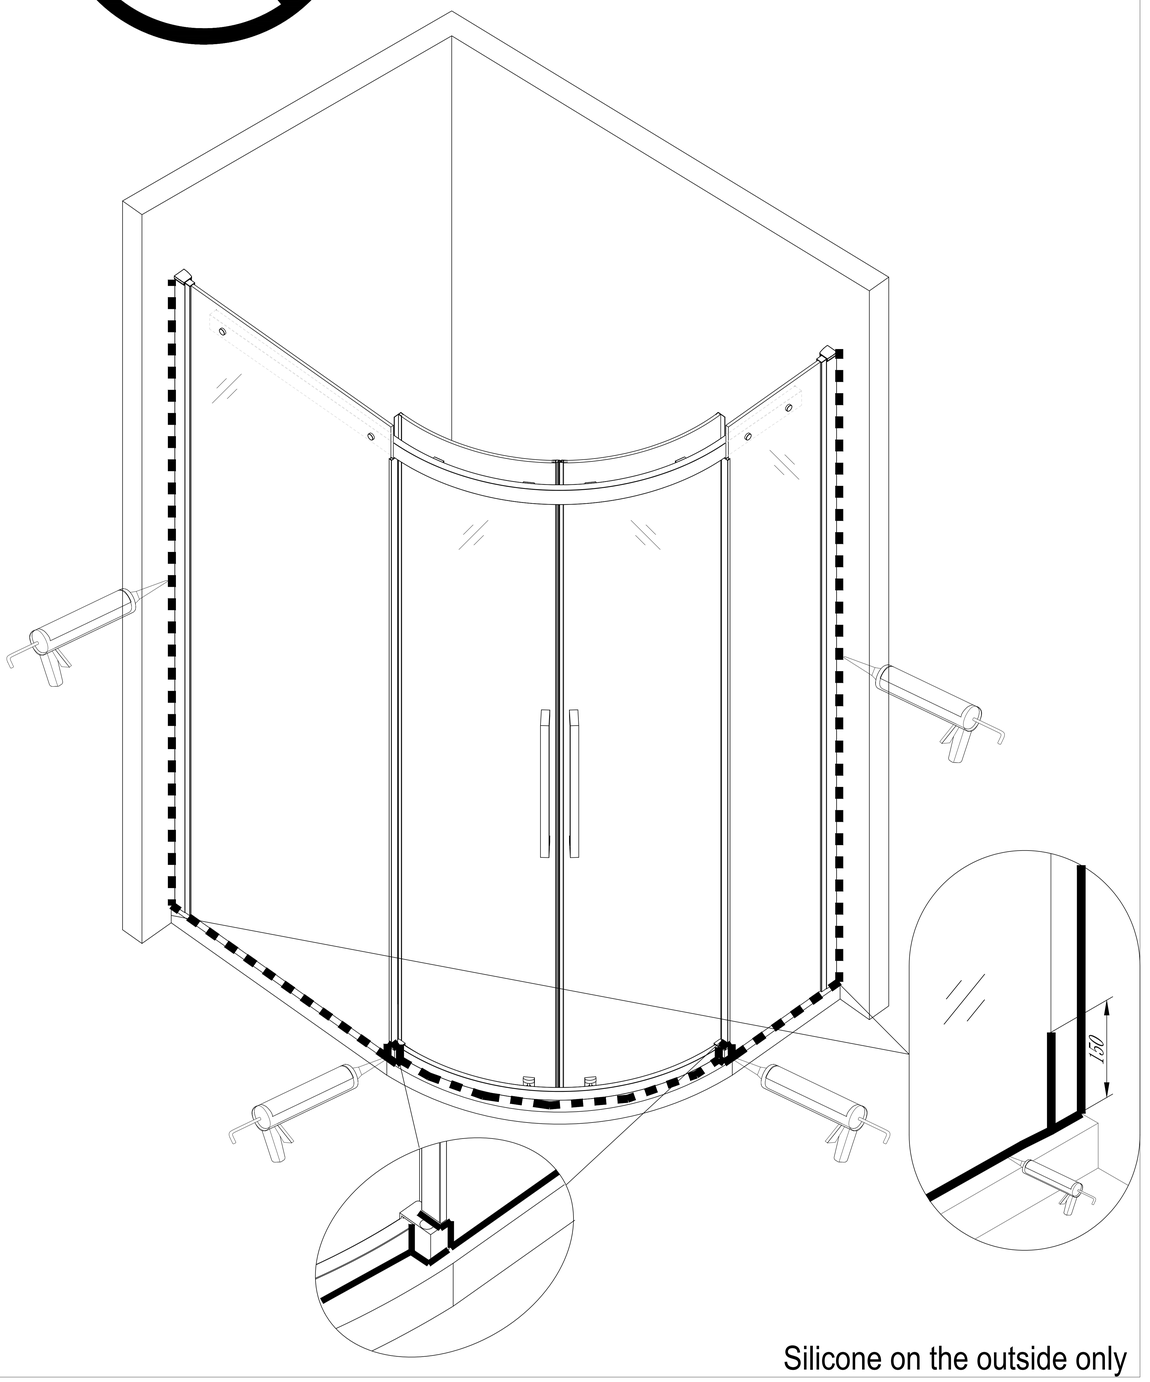

Silicone on the outside only

Eastbrook Road, Gloucester GL4 3DB

Technical Helpline: 01452 317890

Email: technical@eastbrookco.com

Cleaning and Maintenance of Shower Enclosures

Do not clean the shower enclosure with irritant detergents such as alcohol, bleach or other chemical cleaners.

Only clean with mild soapy water or a proprietary cleaner where the label advises it is suitable for the materials the enclosure if constructed from. Test on a small area first.

For treating limescale we would recommend distilled vinegar in a half and half solution with water.

Following installation should you find that there is a notable noise when the glass door moves you may add a small amount of silicon lubricant onto the roller wheels and tracks, hinges or clips.

It is the responsibility of the product owner to maintain the product as recommended above. Also, to check for parts which have broken or become loose to protect against failure of the enclosure.