


## **TOP FIXING TOILET SEAT INSTALLATION** **INSTRUCTIONS**

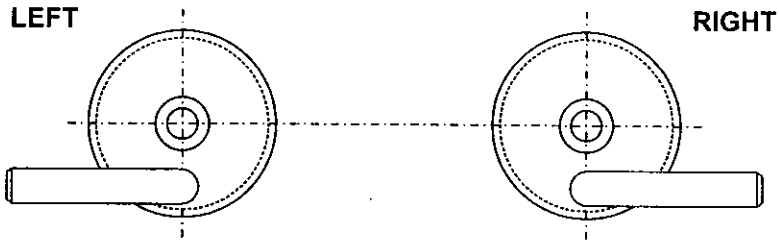

### **Installation Instructions**

Seat fixings are handed and should be fitted as follows.

Slide each seat fixing into the seat hinge from the inside of the hinge. The upright stem must be to the rear so that the screw head is covered by the seat when it is closed.

Put the white rubber washers over the black rubber stems to provide a washer between the seat and the toilet.

Push the black rubber sleeved stems into the holes on the toilet and push firmly down.

Tighten the screw until seat is secure.

### **Care Instructions**

Clean the seat regularly and do not use abrasive or acid cleaning products.

### **Guarantee Information**

This seat is guaranteed against faulty materials or manufacturing for one year following installation.

This guarantee covers replacement of faulty product only and no installation or other costs will be accepted.