

200.00 mm

Eastbrook

Eastbrook Road, Gloucester GL4 3DB

Technical Helpline: 01452 317890

Email: technical@eastbrookco.com

Freestanding Tap

INSTALLATION

Please ensure you turn off the mains water supply before commencing work.


REMOVING EXISTING TAPS / MIXERS

1. After disconnecting the water supply, drain the pipework. Unscrew the nuts connecting the water pipes to the fittings.

2. Save and inspect the fibre washer between the base of the flexi tails and the water pipe.

FITTING NEW MIXER

1. Identify all components and ensure there is no damage prior to starting the installation. No claims can be made after fitting the product.
2. Place fixing plate on the floor in desired position and mark hole locations.
3. Drill through the marked positions on the floor. Place wall plugs into the six drilled holes.
4. Connect the flexi hoses through the prepared holes to the hot and cold water supply.
5. Ensure tap is in the OFF position. Turn on the water supply and check for watertightness around the flexi hoses.

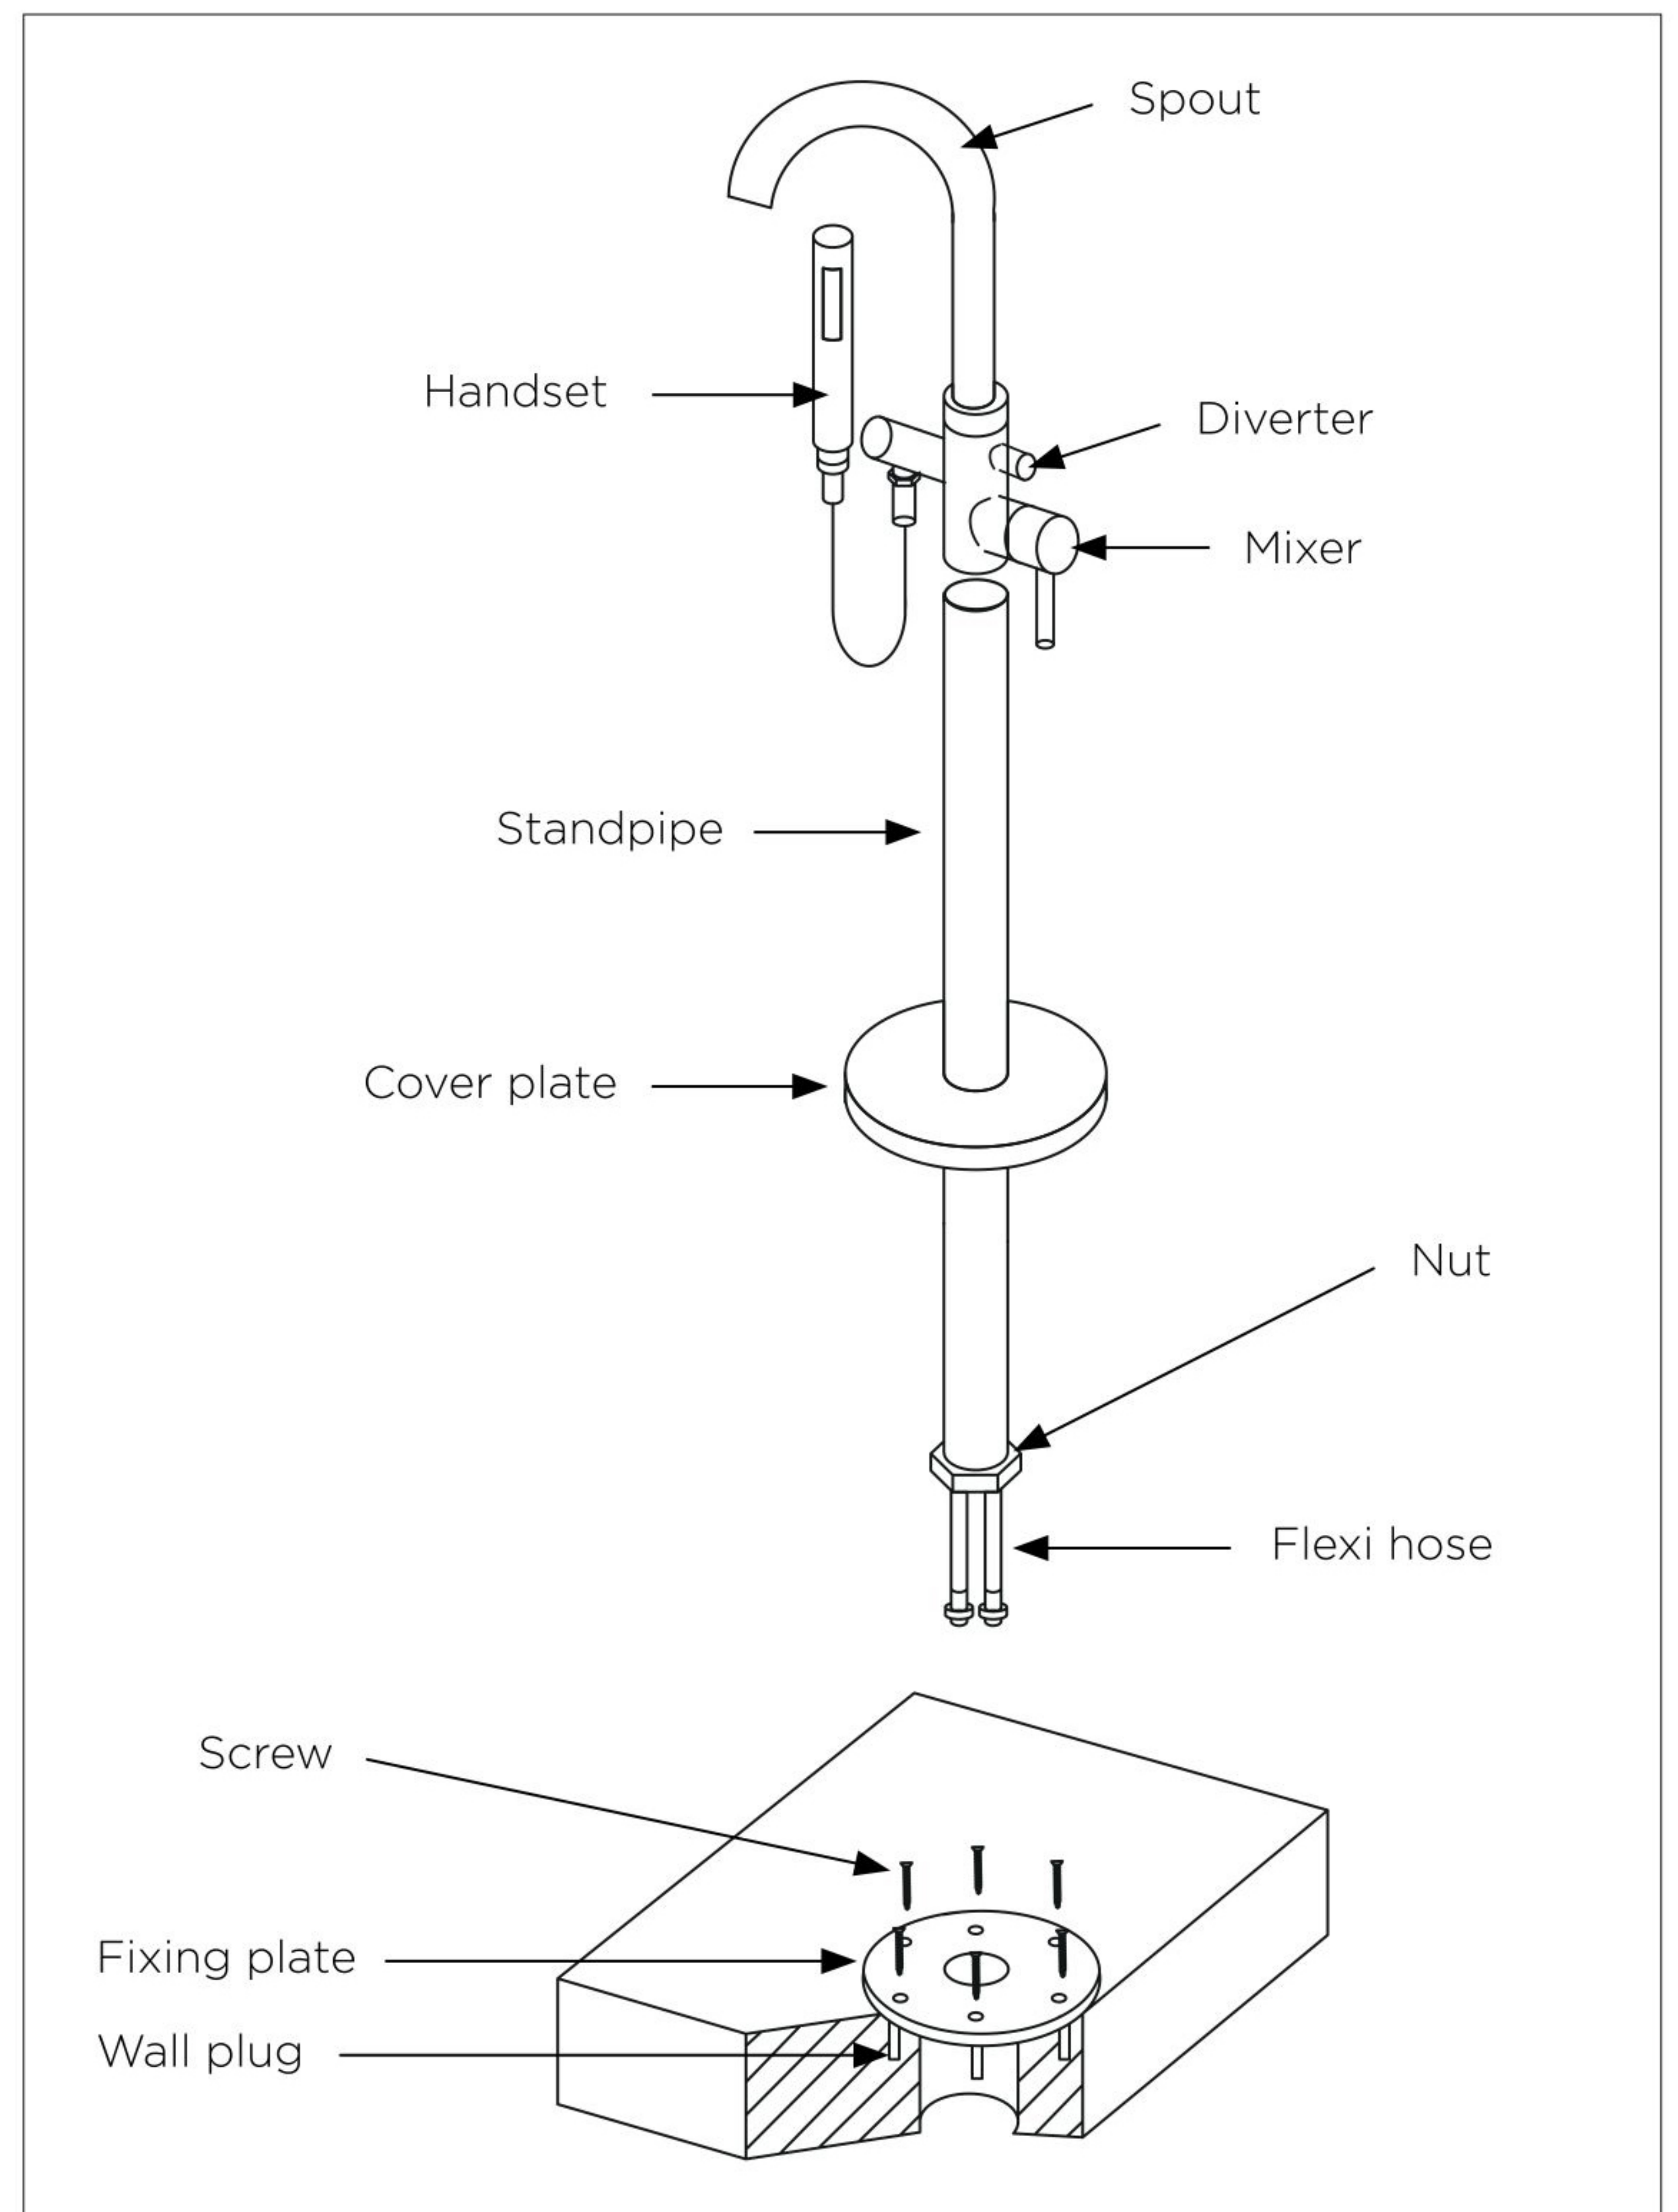

6. Line the fixing plate up with the six wall plugs whilst the tap assembly is in position. Tighten the six screws to secure the standpipe.
7. Tighten the nut to secure assembly onto the fixing plate. Once secure slide the cover plate over the fixing plate.
8. Turn on water supply and allow to run for a few minutes to flush out the piping system thoroughly. Check connections for watertightness.
9. Freestanding tap is now installed. Note: Pull out the diverter to operate the hand shower.

Aftercare

During installation, extra care must be taken to avoid damaging the fitting or its finish. To maintain the appearance of the fitting, please ensure it is cleaned regularly using a clean soft damp cloth only. Do not use abrasive sponges, scouring agents, organic solvents or acidic cleaners as they may cause surface deterioration.

280.00 mm