


The bath must be installed level and the distance from the floor to the underside of the roll must be set to a minimum of 545mm.


- A. Measure and fit the side support brackets to the wall as shown. (i) Secure with coach bolts provided.

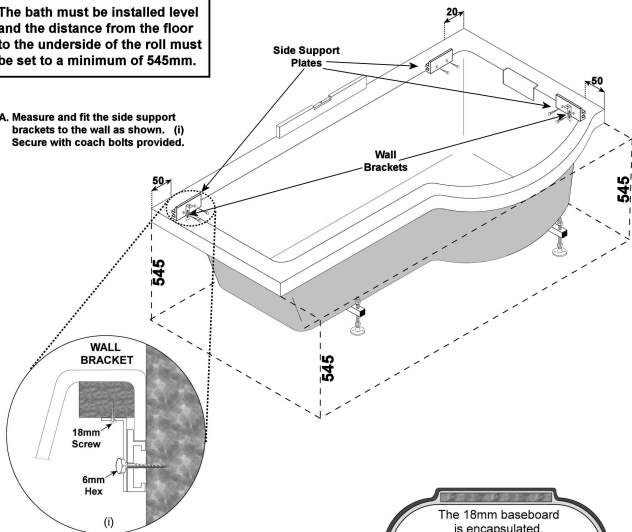


- B. Place the cradle supports parallel on both ends of the baseboard, mark and drill pilot holes. (3mm ϕ , 6mm deep max) Secure using 5x40mm screws.

- C. Invert the bath and adjust the feet so the bath is level and set to the correct height.


- D. Once the bath is in place fit wall brackets.

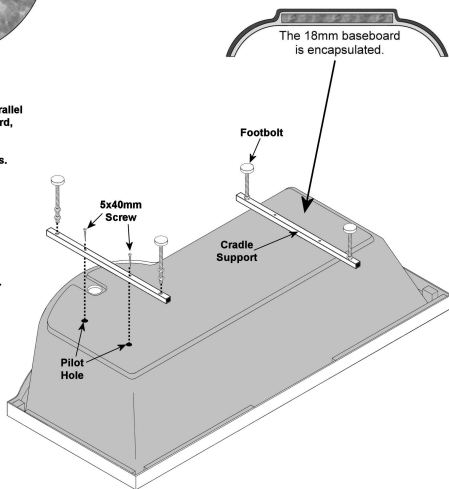


The bath must be installed level and the distance from the floor to the underside of the roll must be set to a minimum of 545mm.

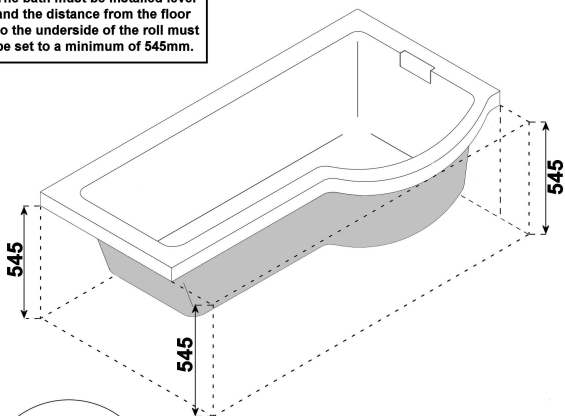



The panel is supplied to fit but if the walls are uneven or the walls are tiled making the panel too long, you may have to cut the ends of the panel to fit. This is done using a fine toothed saw.

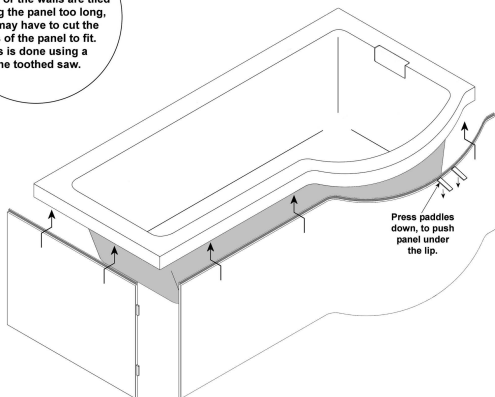

HEAD REST

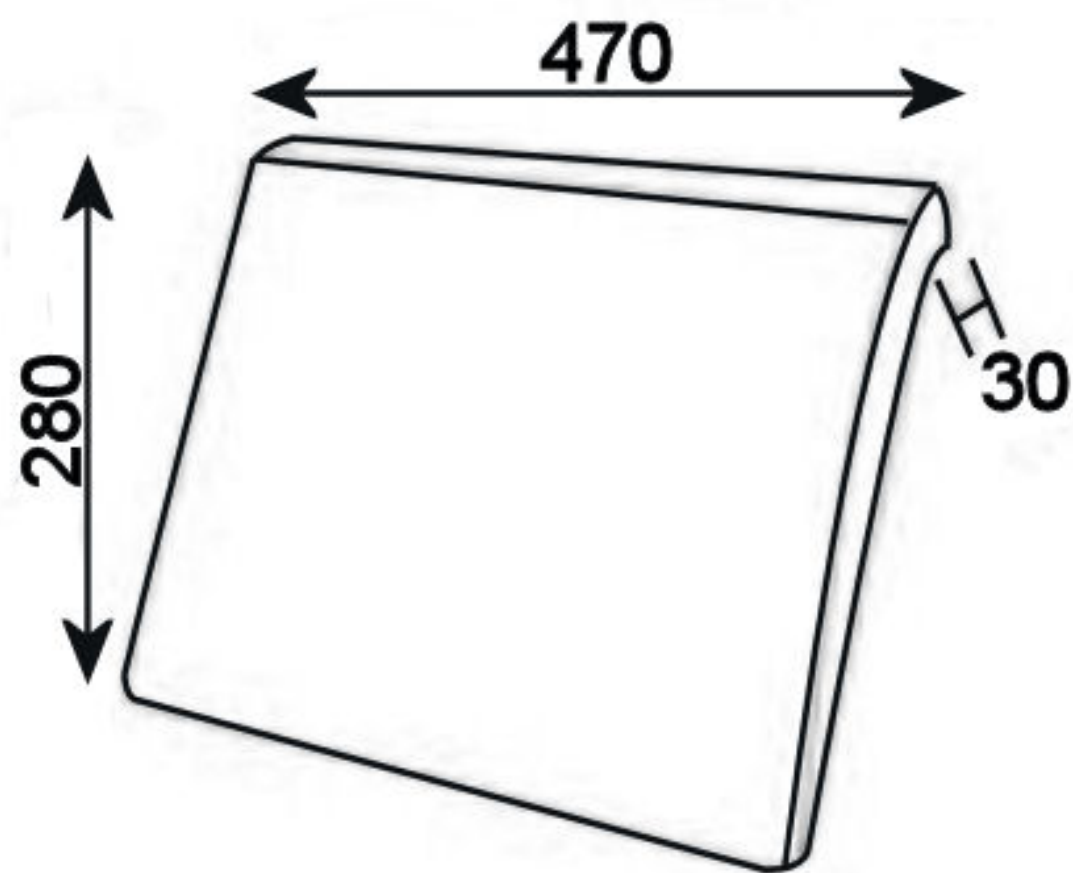

HR900

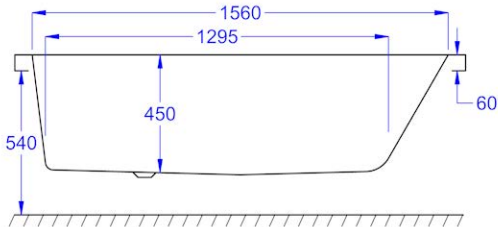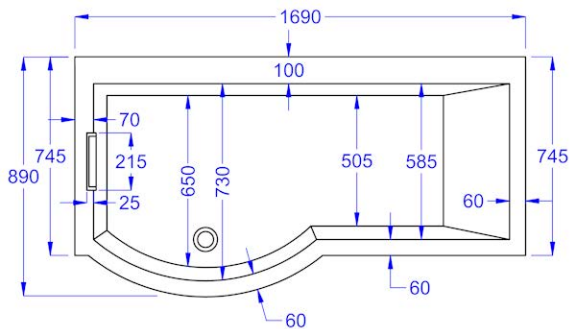

clenda®
The lowest profile jet system in the world.




Carron Bathrooms Ltd
North Carron Works
Stenhouse Road, Carron
Falkirk, FK2 8UW

Tel - +44 (0)1324 638 407
Fax - +44 (0)1324 611 490

 **carron**

clenda®
The lowest profile jet system in the world.

Care & User Guide

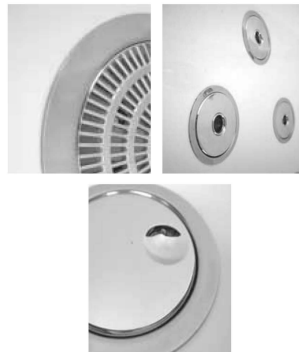

Congratulations on purchasing your new C-lenda spa bath.
We trust you will enjoy the comfort and performance of your system, which features patented C-lenda flush jet technology.
In this guide you will find information on how the fittings work and tips for preserving their appearance.

Care & User Guide

Cleaning

We recommend cleaning with a soft cloth and warm soapy water.

DO NOT use abrasive cleaning products.



① Flush Mini Jet
Small hydro-therapy jet.

- Used in clusters to target specific areas like the lumbar and feet.

(Clenda Systems 2/3/5/6)



② Flush Centro Jet
Mid sized hydro-massage body jet.

- To adjust direction pivot centre eyeball.

(Clenda Systems 1/2/3/4/5/6)



③ Chromotherapy On / Off

- Simply press the control once to turn on, the light surrounding the control will flash and the chromotherapy light will rotate through the colour cycle. Push button repeatedly until the desired colour appears. Keep pushing the button to turn both button and light off.

(Clenda Systems - 3/6)

④ Whirlpool On / Off

- Simply press the control, which illuminates when pushed. To activate your system on full power, press again to turn the system off. The control will only operate if there is enough water in the bath. The system will automatically switch off after approximately 20 minutes, unless turned off manually.

(Clenda Systems - 4/5/6)



Please note that the bath above shows all switches and jets for the Clenda systems. The fittings available may vary depending on which system is ordered.



⑤ Flush Suction

Safety grill where water is drawn from the bath into the pump.

- The built in safety sensor reduces suction pressure within seconds of being activated, preventing anything being sucked and held against the suction grill.



Ensure the safety grill is not blocked with flannels, toys, etc. as this will activate the safety sensor.



WARNING - DO NOT USE BATH IF SUCTION COVER IS DAMAGED OR REMOVED.

(Clenda Systems - 1/2/3/4/5/6)



⑥ Flush Air Button

Turns the pump or air blower on and off.

- To turn on. Press centre button firmly.
- To turn off. Press a second time.

(Clenda Systems - 1/2/3)



⑦ Flush Air Control

Control the flow of air to the jets.

- To increase jet intensity, turn clockwise.
- To reduce jet intensity, turn anticlockwise.

(Clenda Systems - 1/2/3/4/5/6)