49. 5001/49. 5002/49. 5003/49. 5004/49. 500549. 5006/ 49. 5007/49. 2021/49. 2022/49. 2023/49. 2024/49. 2025

Eastbrook

Eastbrook Road,Gloucester Gl4 3DB

Technical Helpline:01452 317890

email:technical@eastbrookco.com

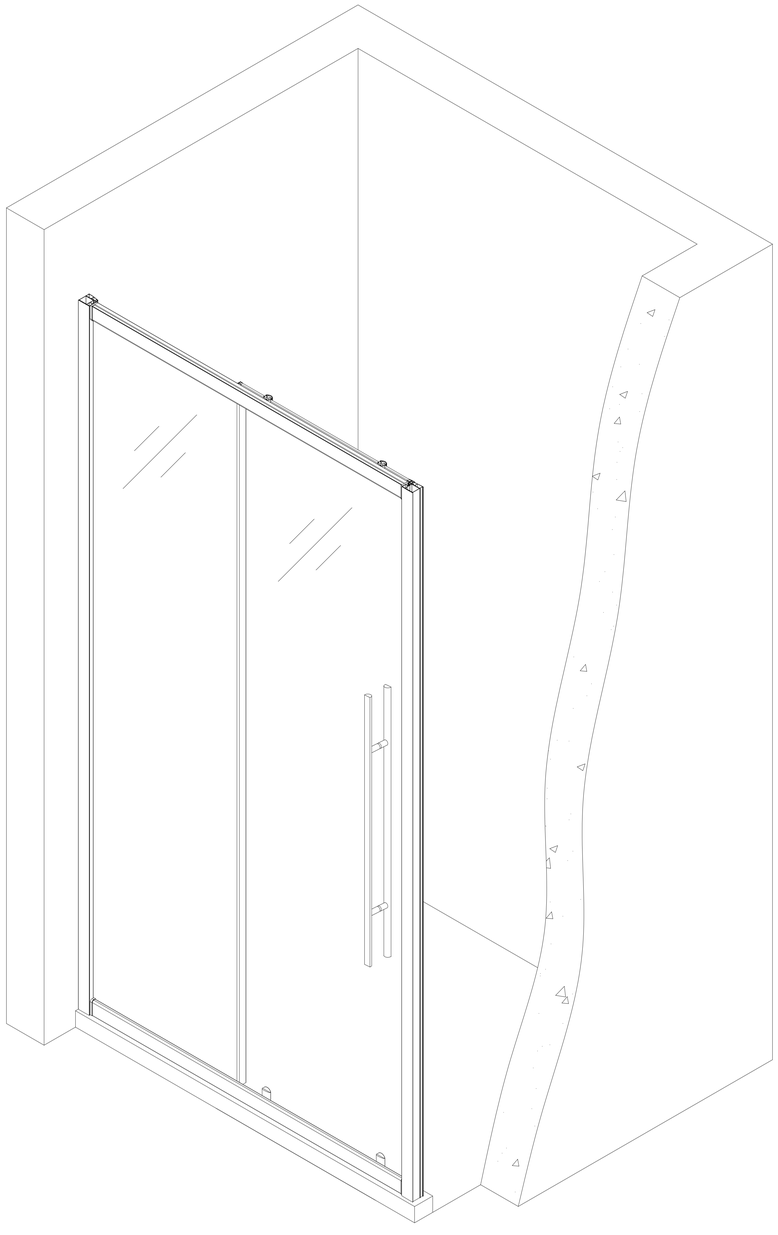

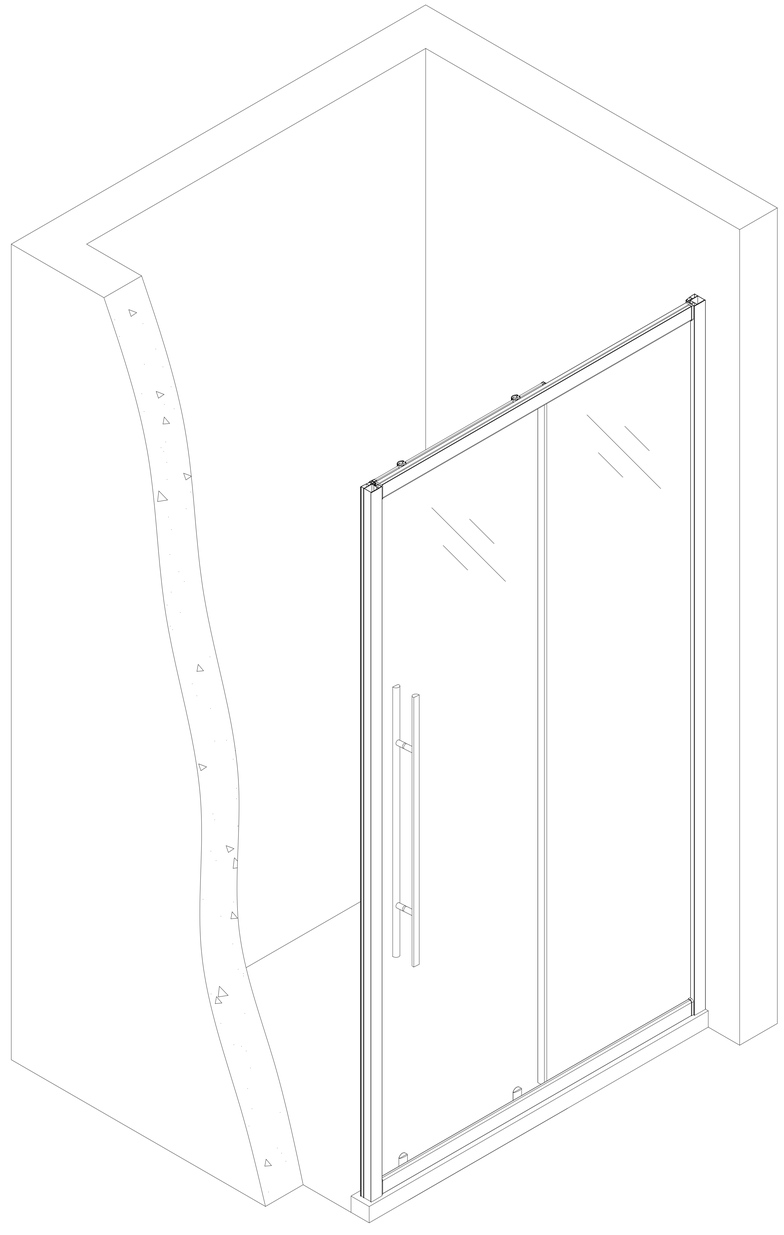

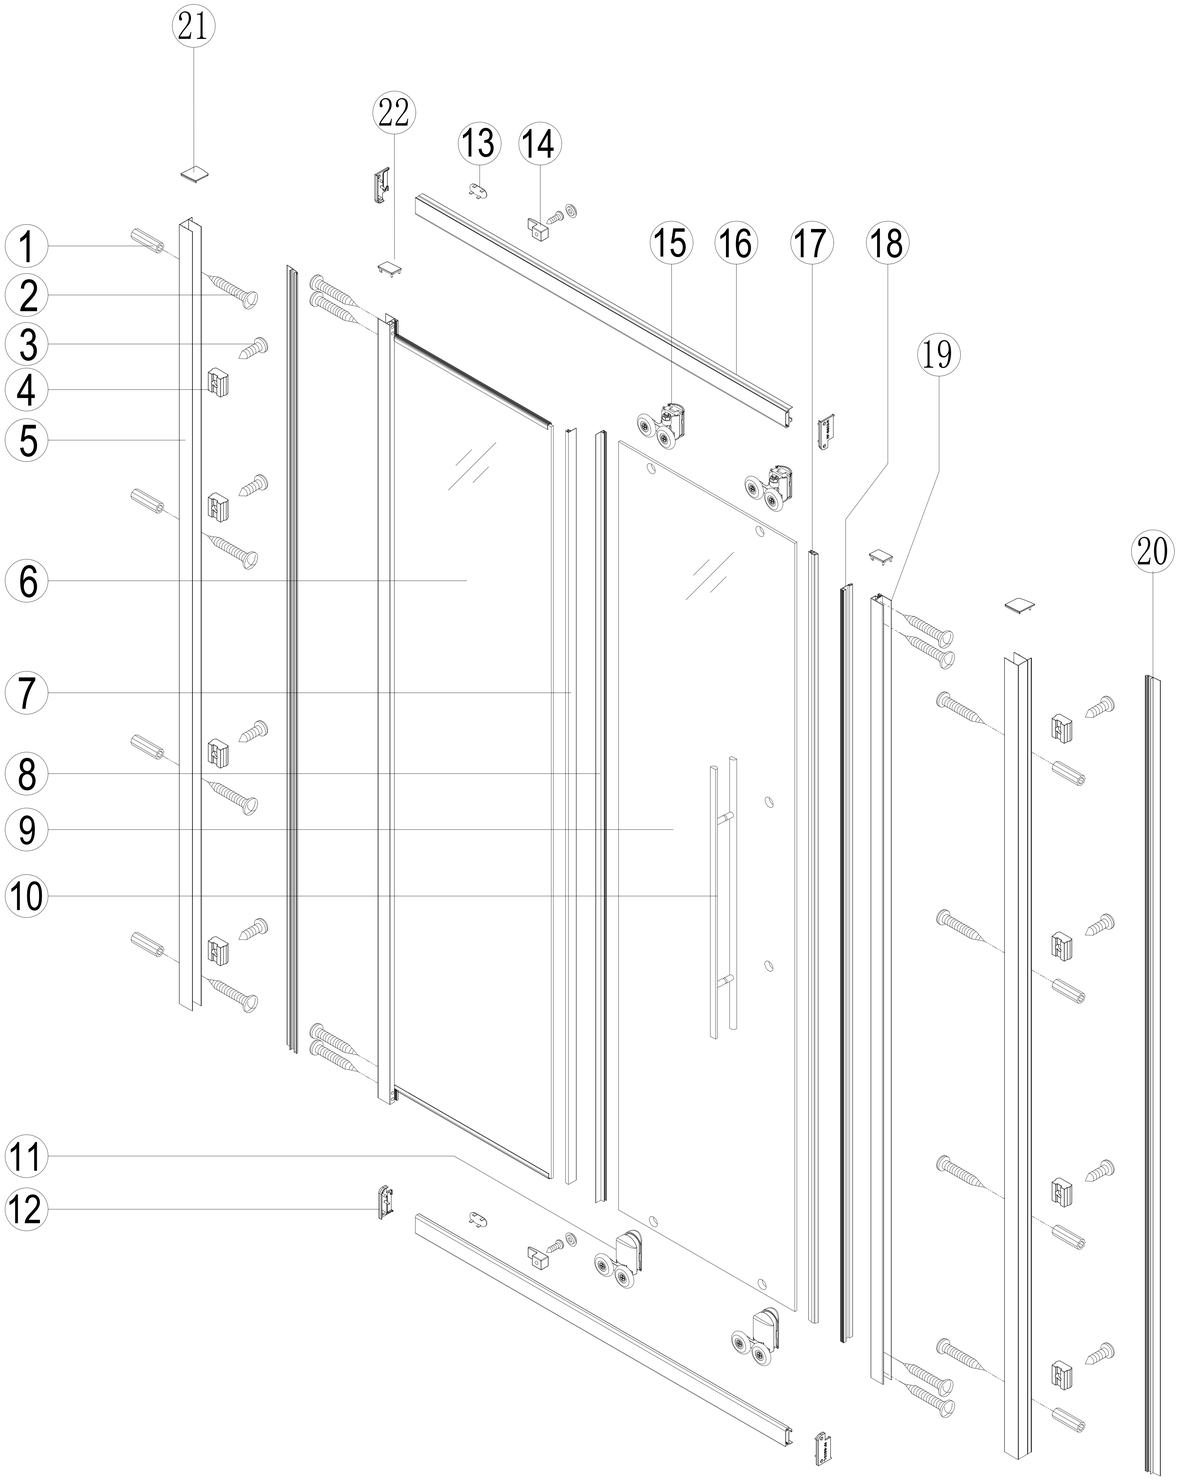
21
22
13
14
15
16
17
18
19
20
1
2
3
4
5
6
7
8
9
10
11
12

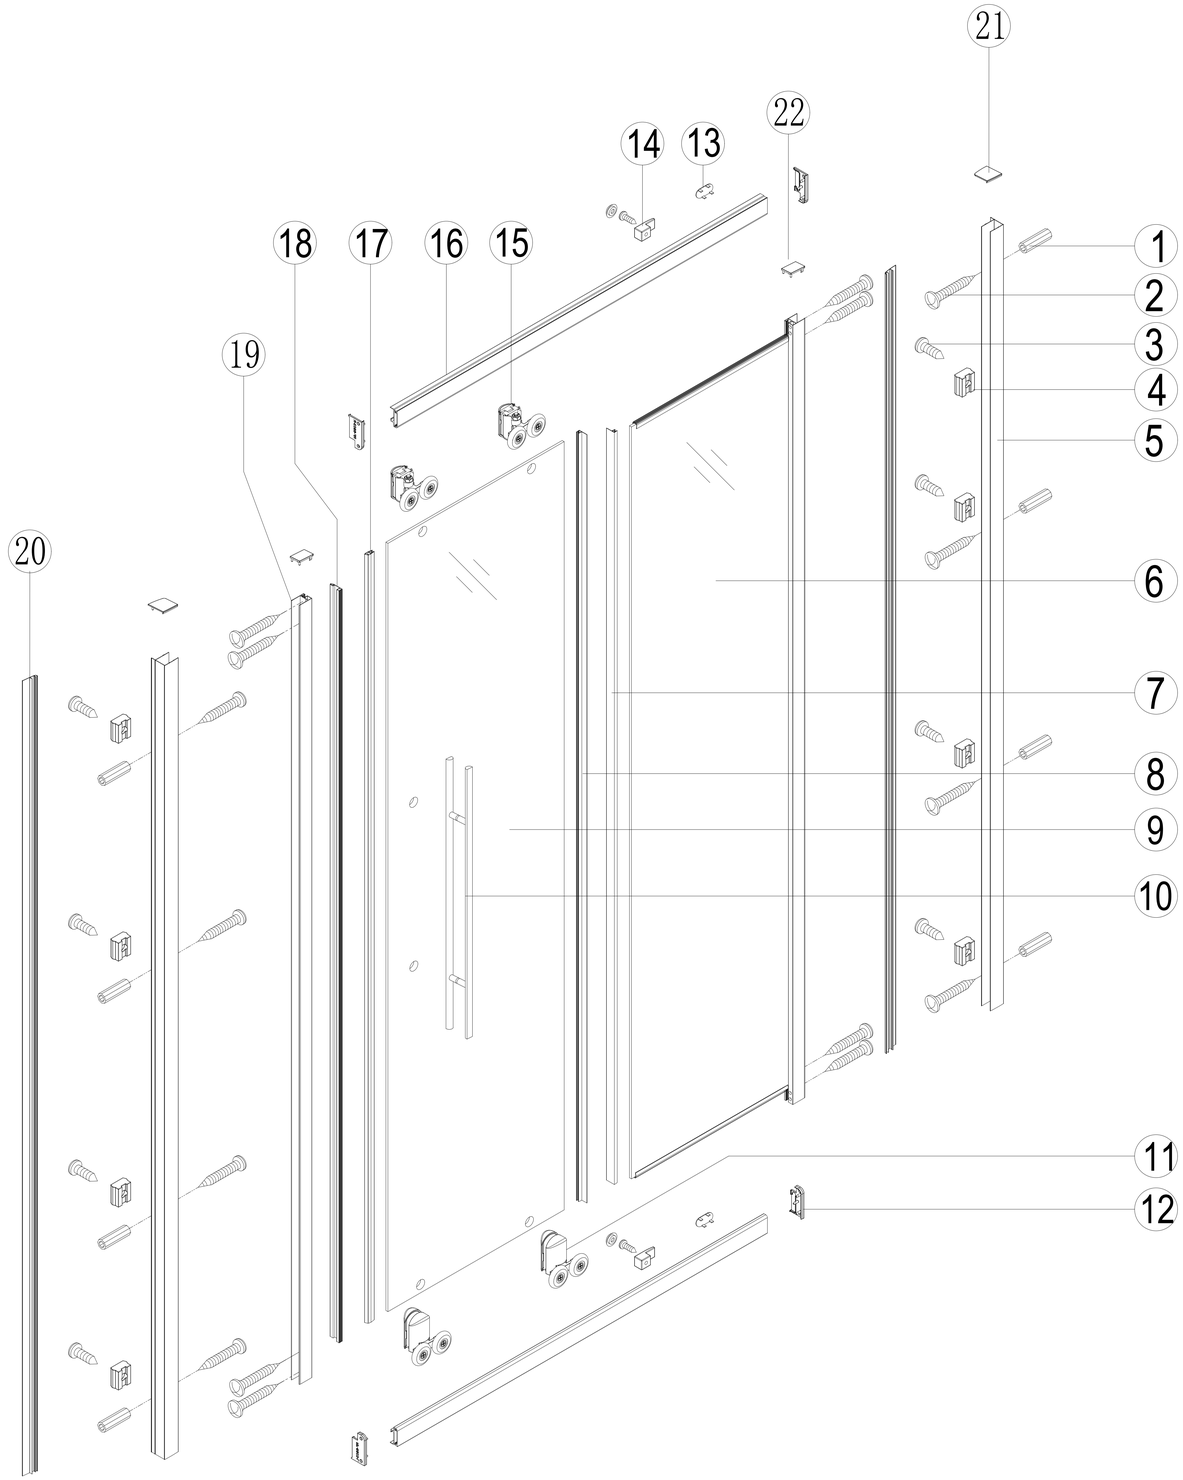
21
22
14
13
18
17
16
15
19
20
1
2
3
4
5
6
7
8
9
10
11
12

1



D6x30 8Pcs

2



ST4X30 16Pcs

3

ST4X12 10Pcs

4



JRF-6Y01 8Pcs

5



JRF-6W01 2Pcs

6



1Pc

7

1908mm



JRF-6Z02 1Pc

8

1970mm



JRF-6Z02 1Pc

9



1Pc

10



JRF-6X04 1Pc

11



JRF-6X02 2Pcs

12



JRF-6Y03 2Pairs

13



JRF-6Y05 2Pcs

14



JRF-6Y02 2Pcs

15



JRF-6X03 2Pcs

16



JRF-1P 2Pcs

17 + 18



JRF-6Z03



JRF-6Z04 1Pair

19



JRF-6W04 1Pc

20



JRF-6C1 2Pcs

21





JRF-6Y12 2Pcs

22



JRF-6Y13 2Pcs

Tools:











2 mm



Ø6mm

Ø3.2mm





1

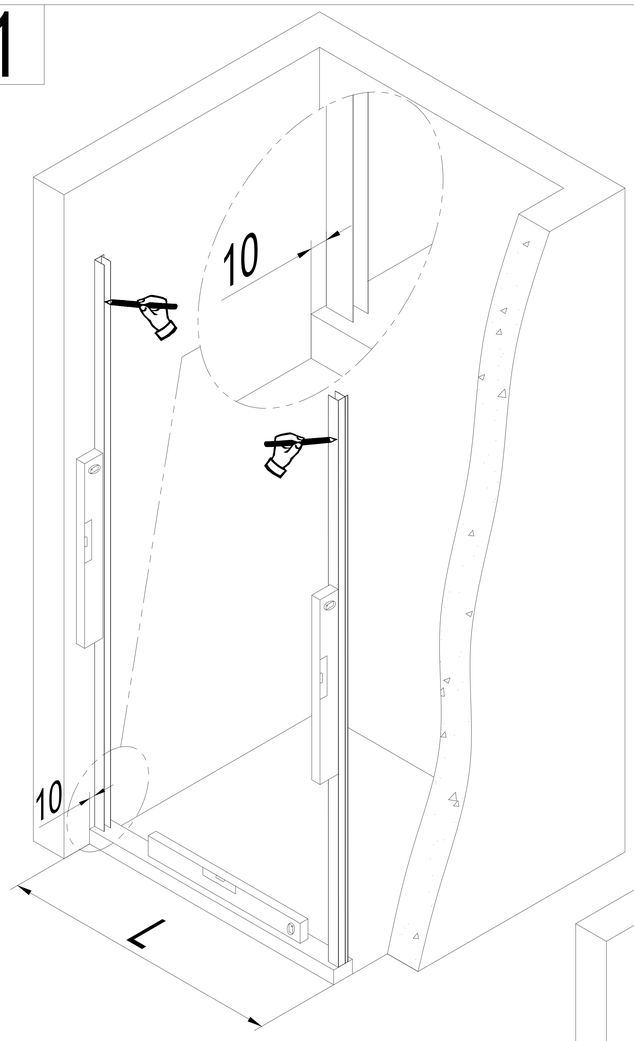

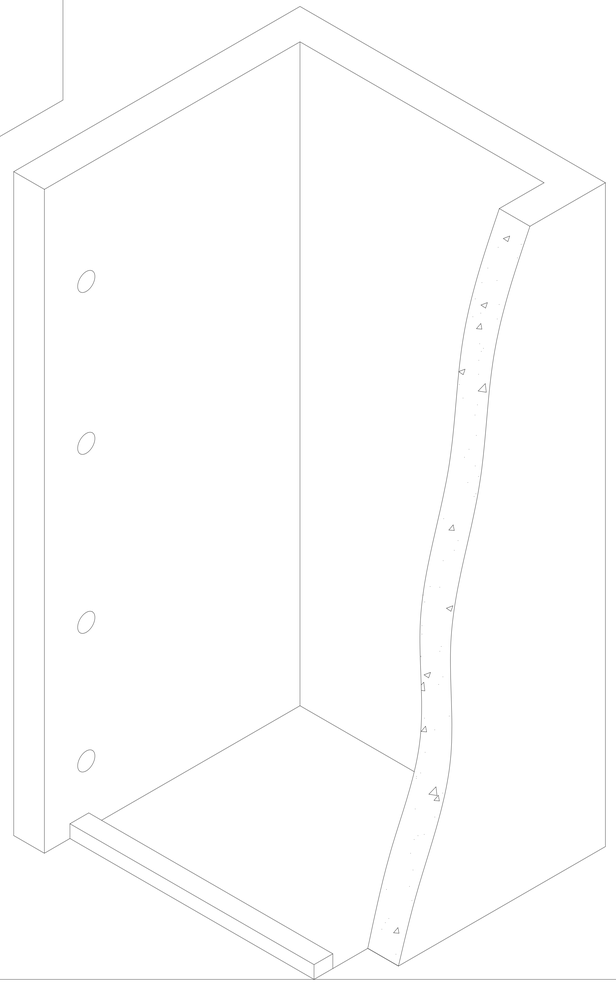

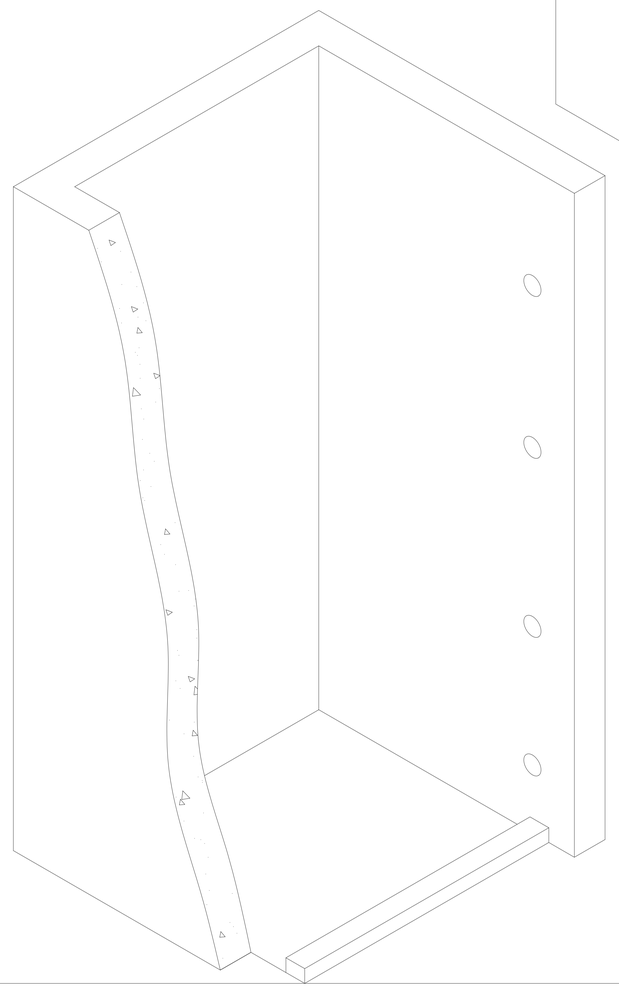

1

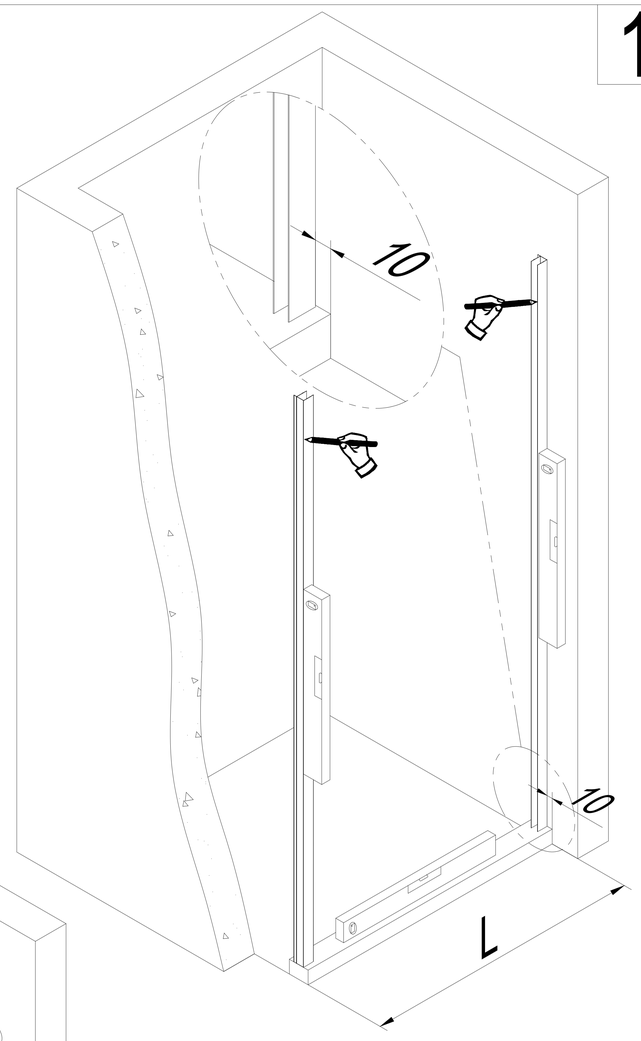

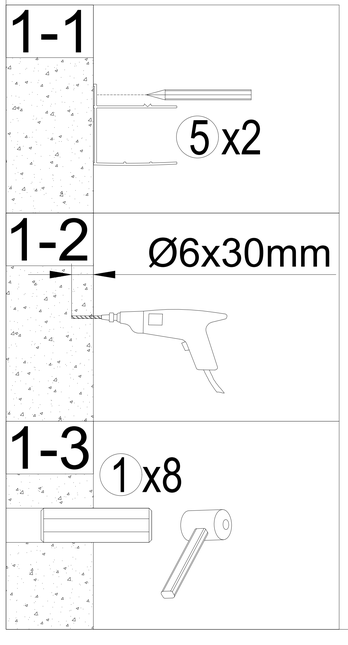

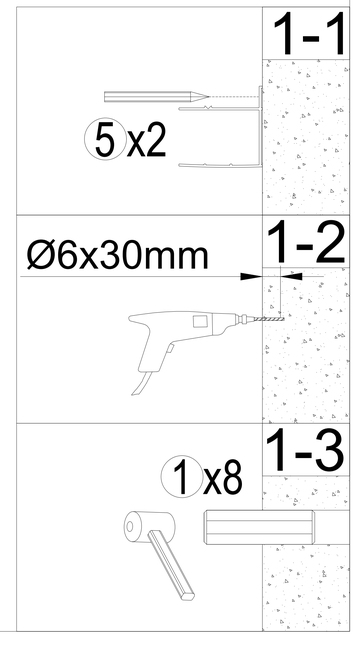

2

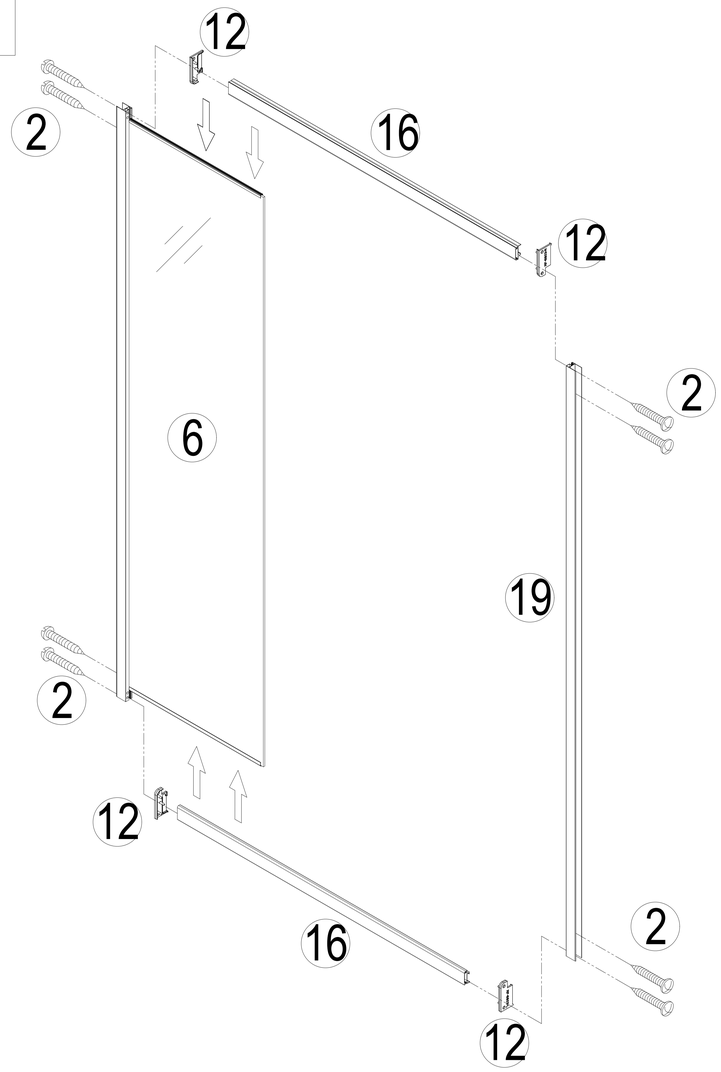
12
2
16
12
2
6
19
2
12
16
2
12


2-1
16
12


2-2
2 x4
19


2-3
2 x4

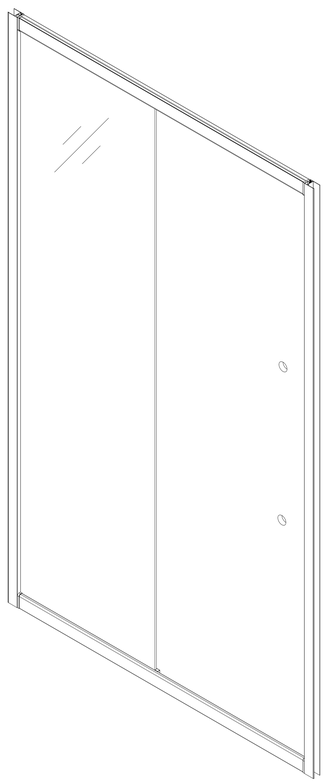

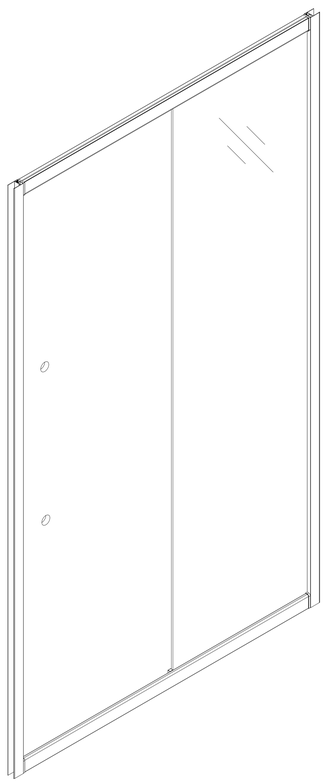

2

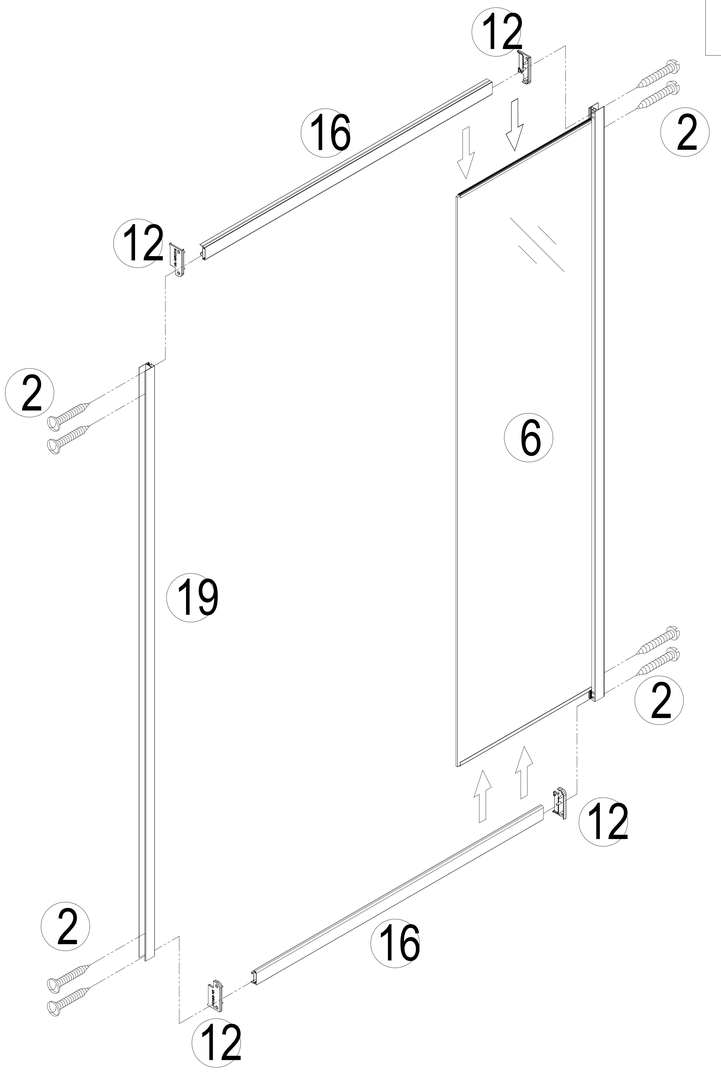
12
16
2
12
2
6
19
2
12
2
16
12

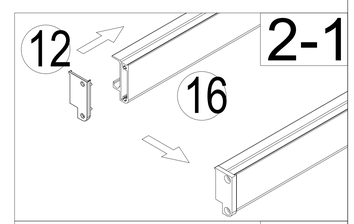
2-1
16
12

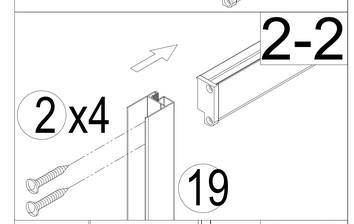
2-2
2 x4
19

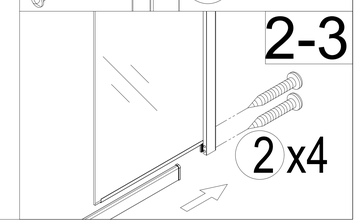
2-3
2 x4

3

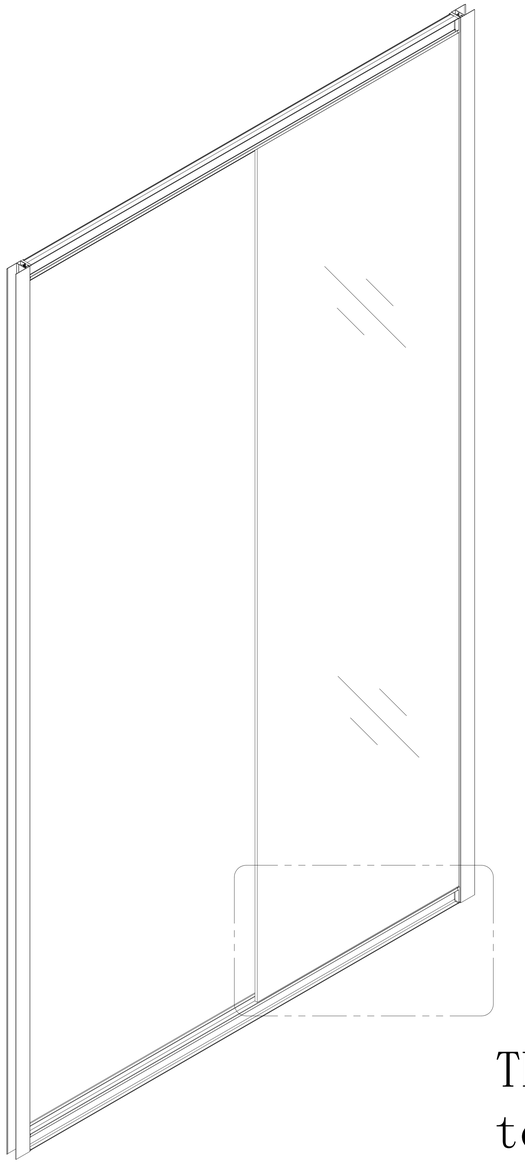

The seal requires to be against the rail.

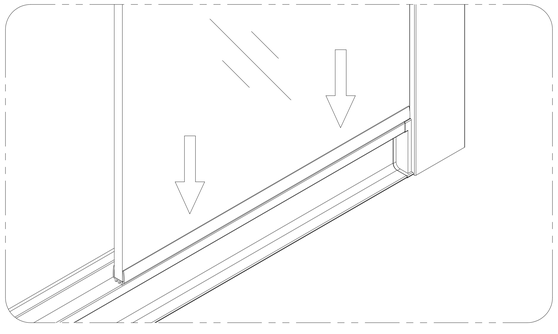

3

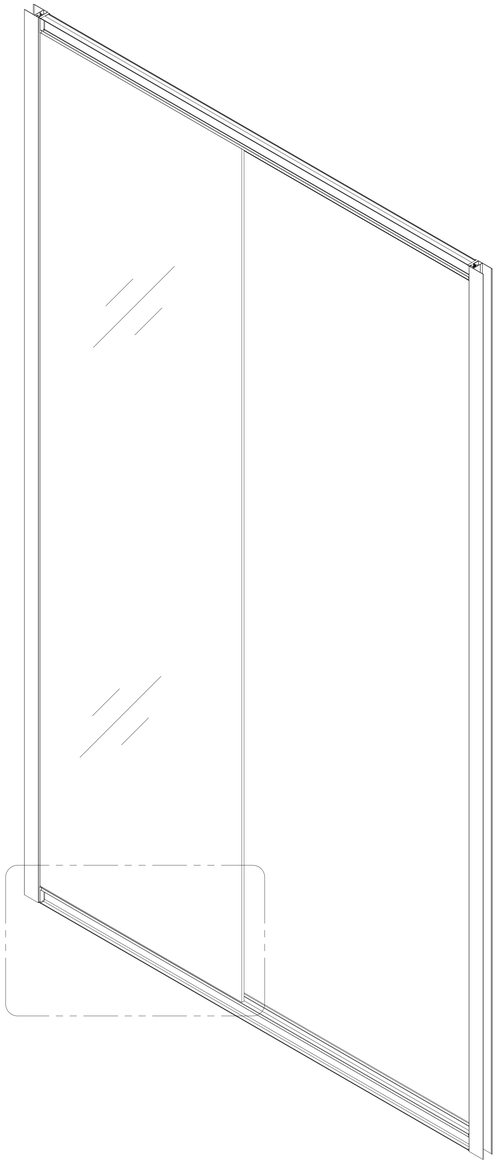

The seal requires to be against the rail.

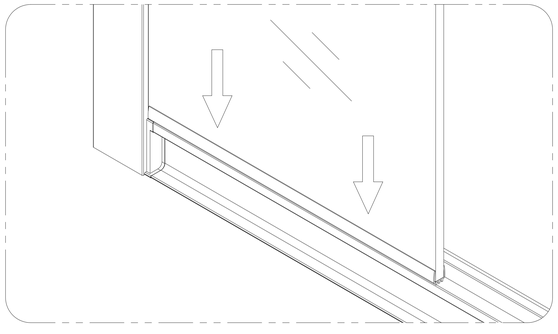

4

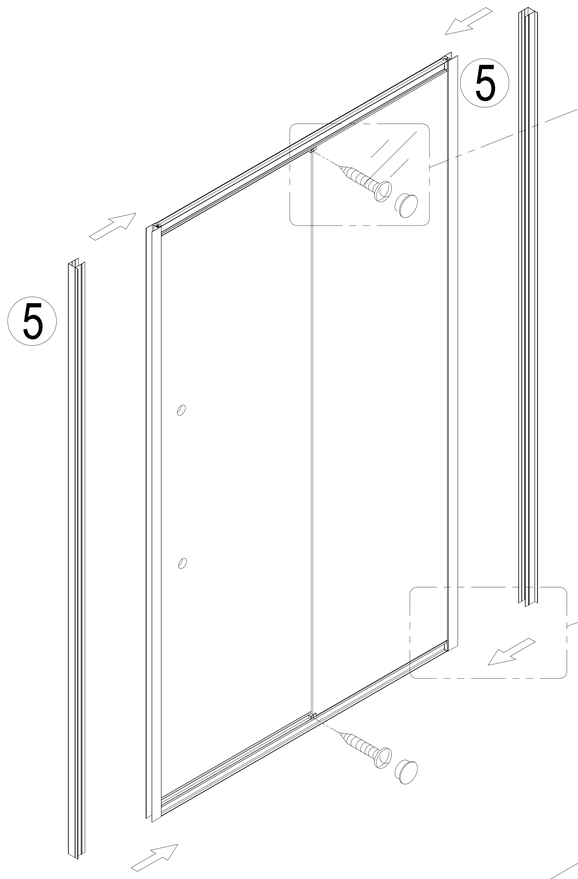
5
5

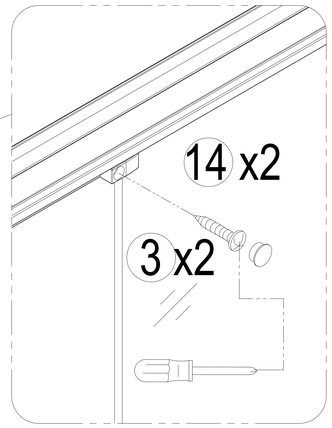
14 x2
3 x2


5
Outside
Inside

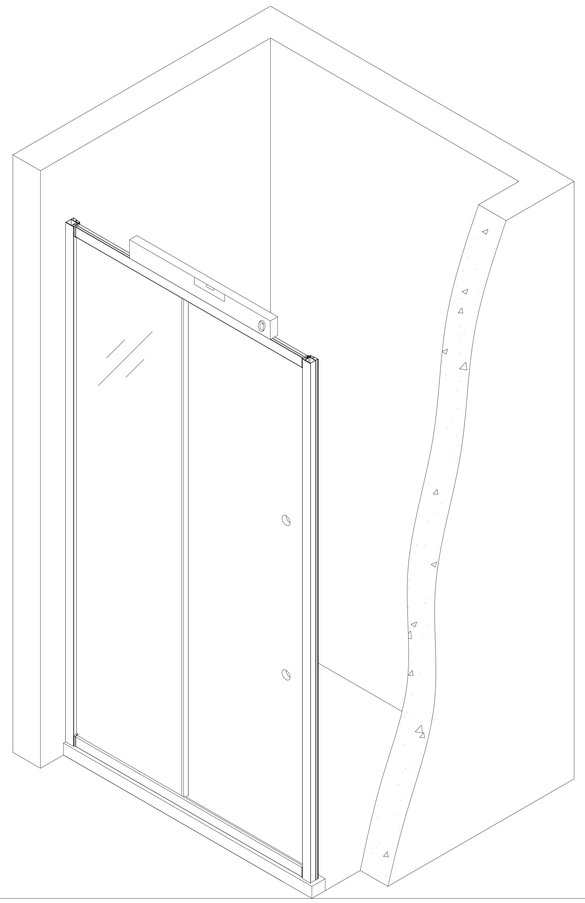

4-1

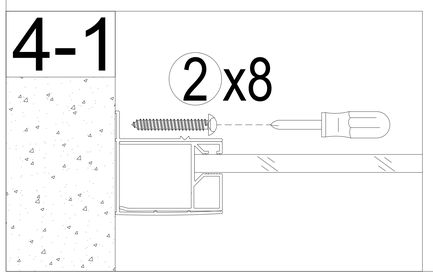
2 x8

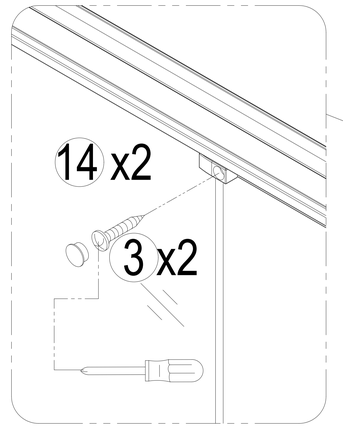
14 x2
3 x2


5
Inside
Outside

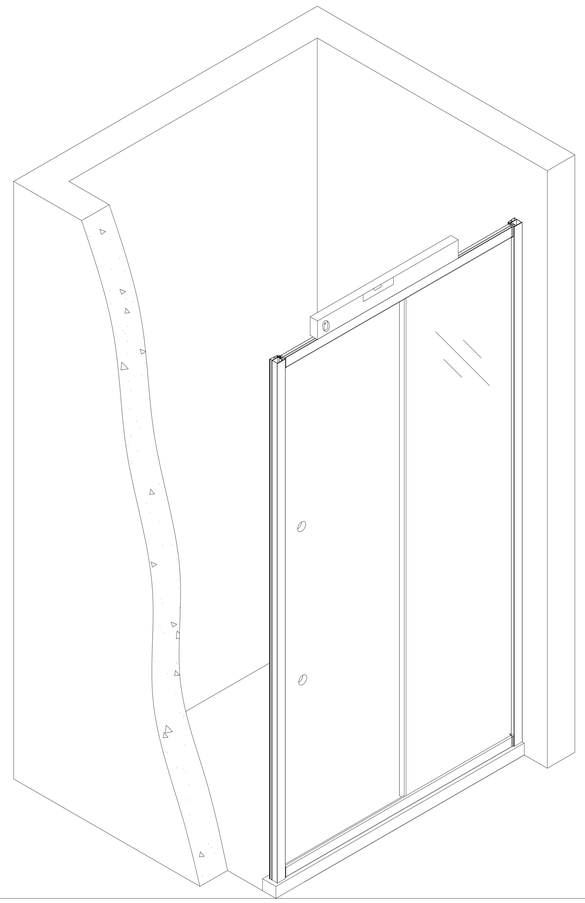

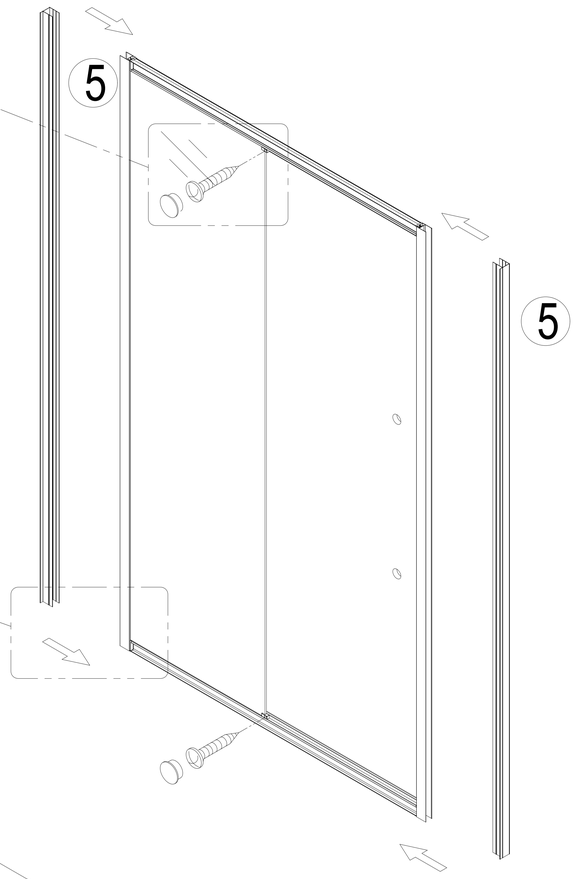
5
5

4

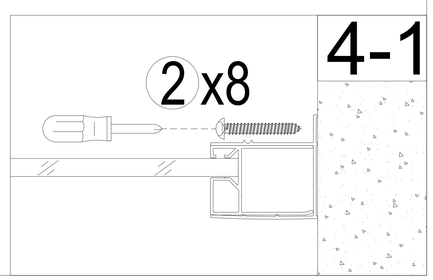
2 x8

4-1

5

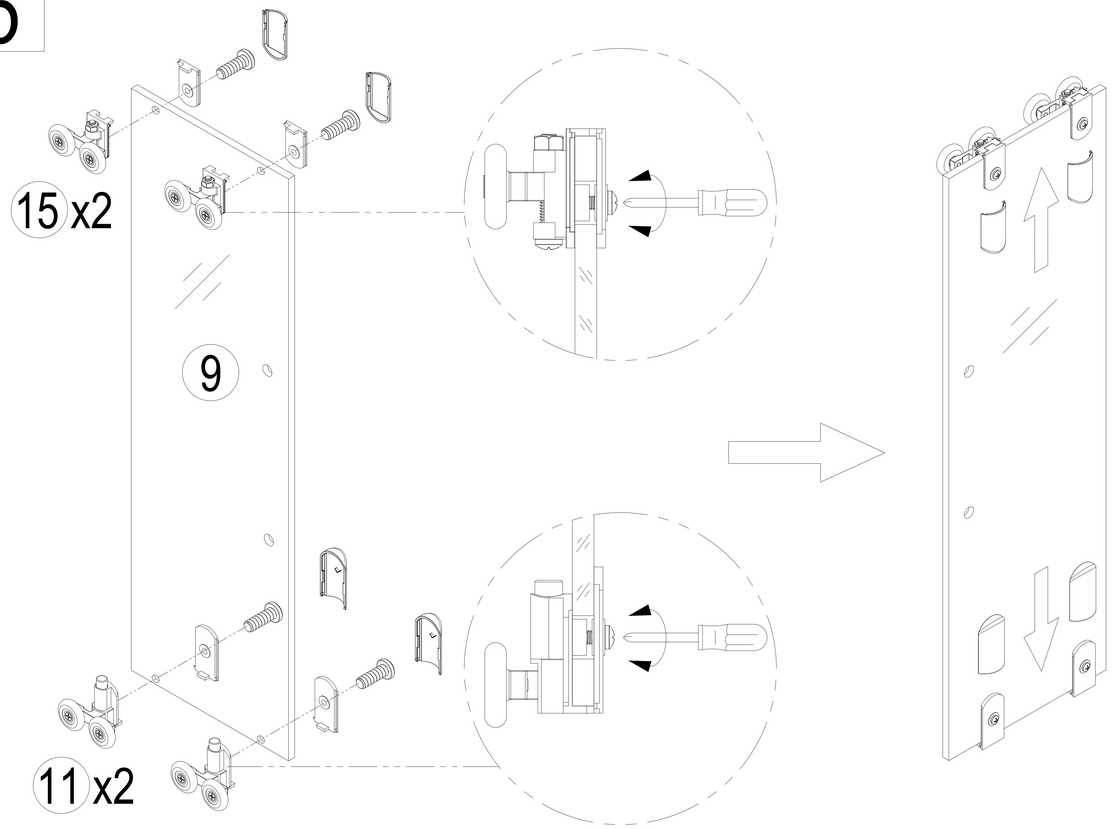

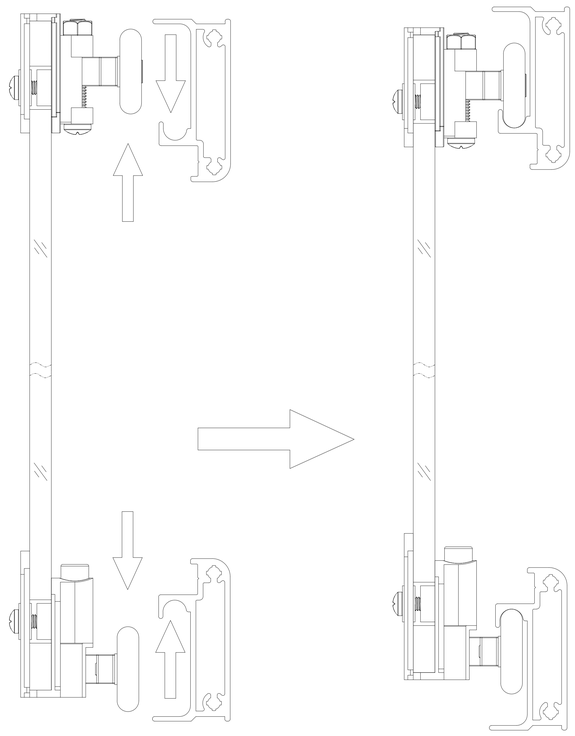

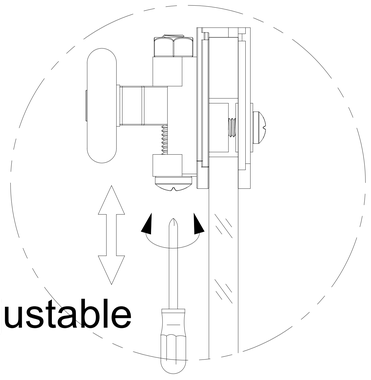

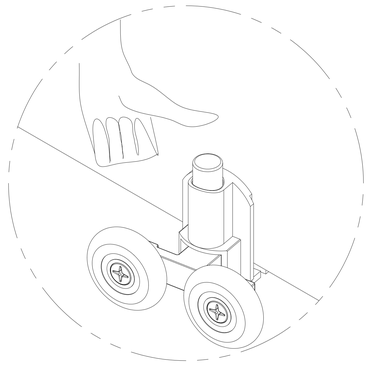

5

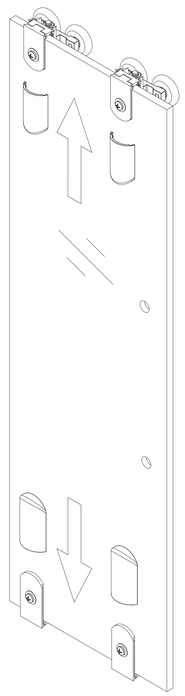

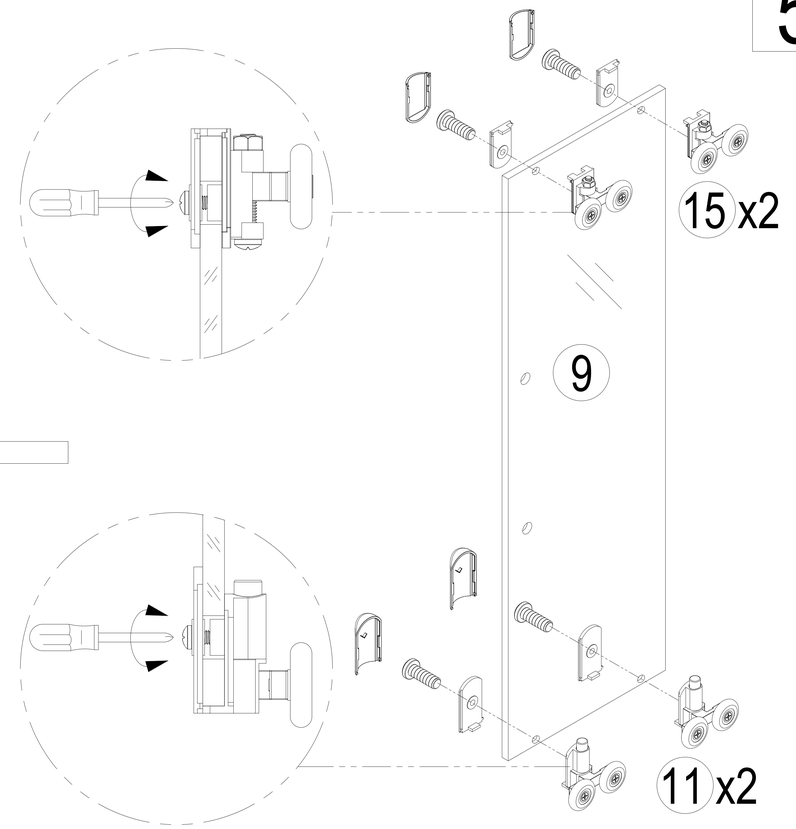

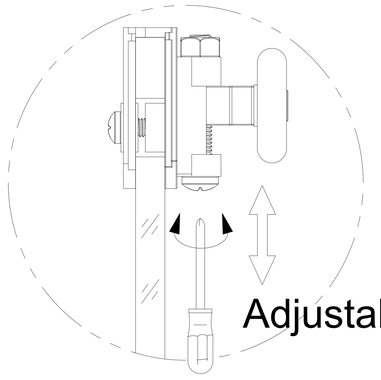

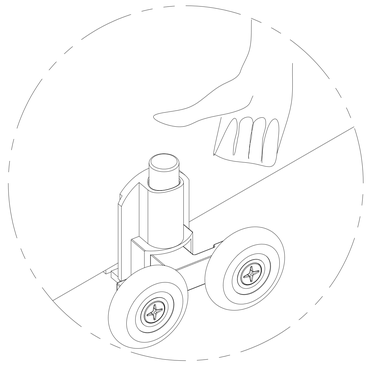

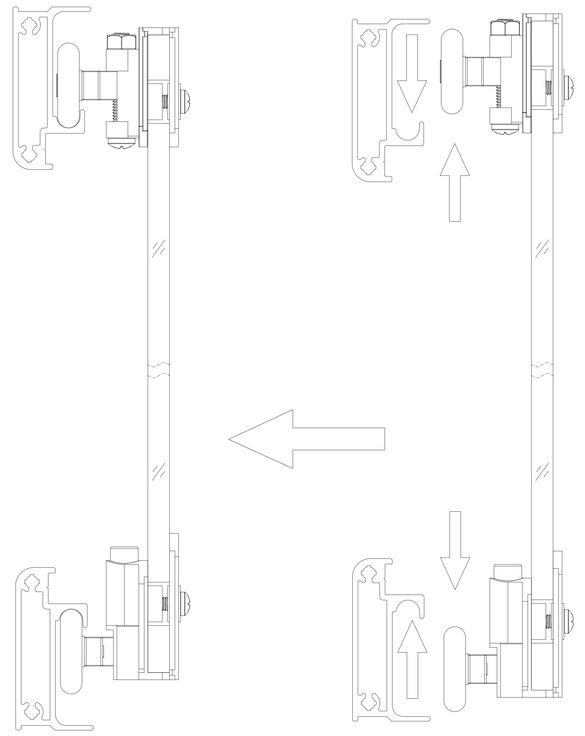

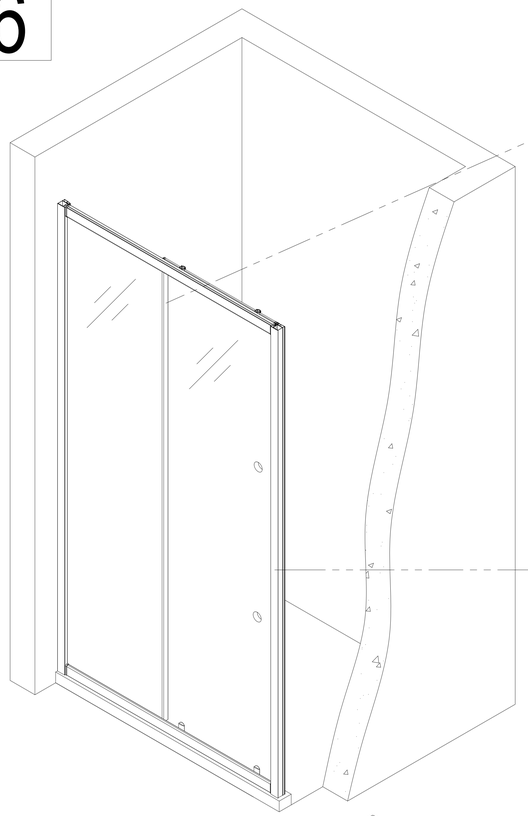


9
8
7
6


18
17

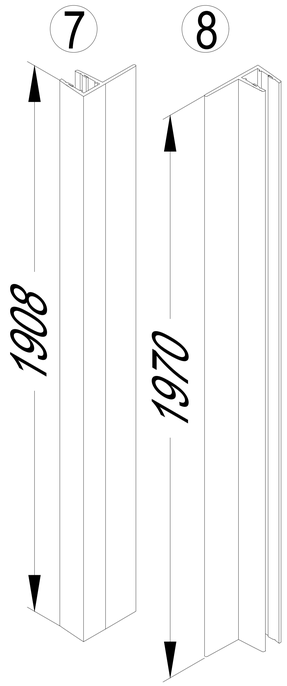
7
8
1908
1970

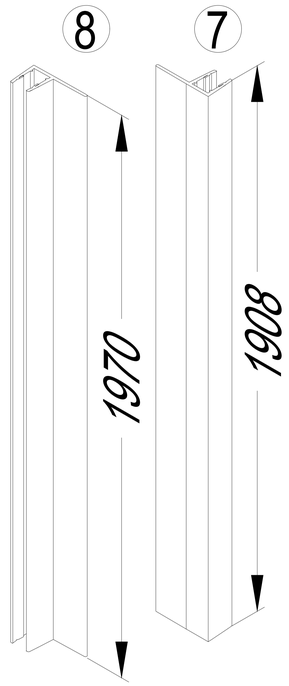
8
7
1970
1908


9
8
7
6


18
17

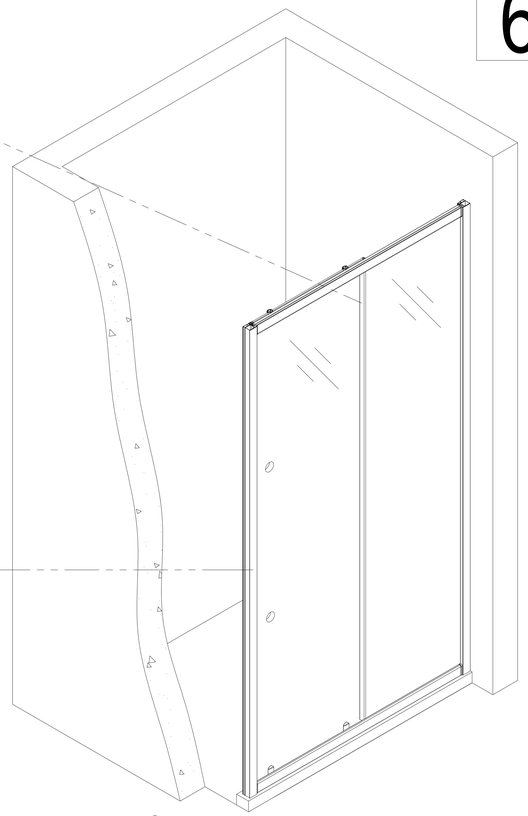

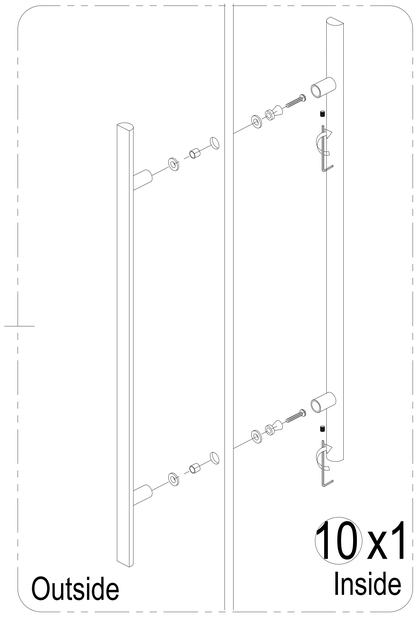
10 x1
Outside
Inside

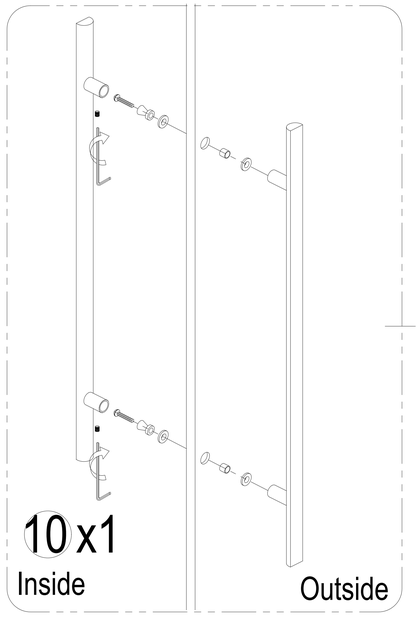
10 x1
Inside
Outside

7

7

7-1 Ø3.2mm 0-20mm

7-2 3 x8 4 x8

7-3 20 x2

7-4

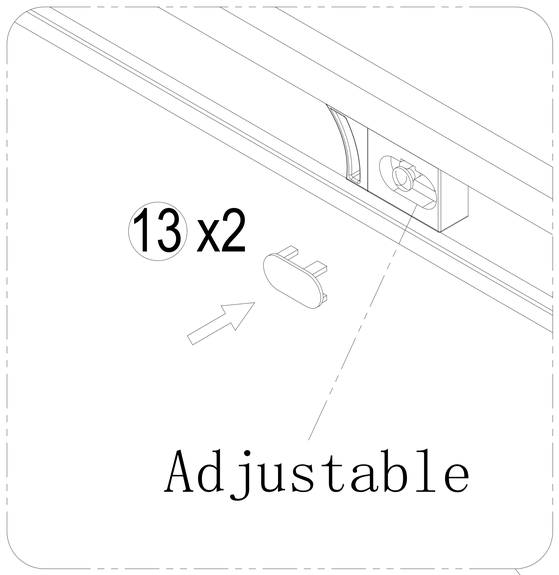

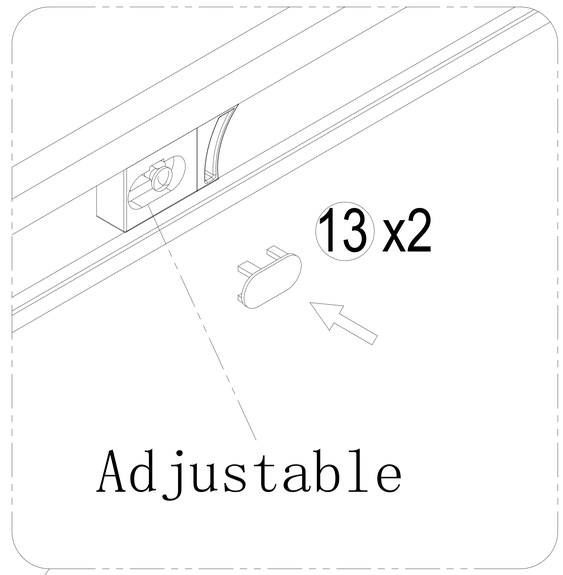

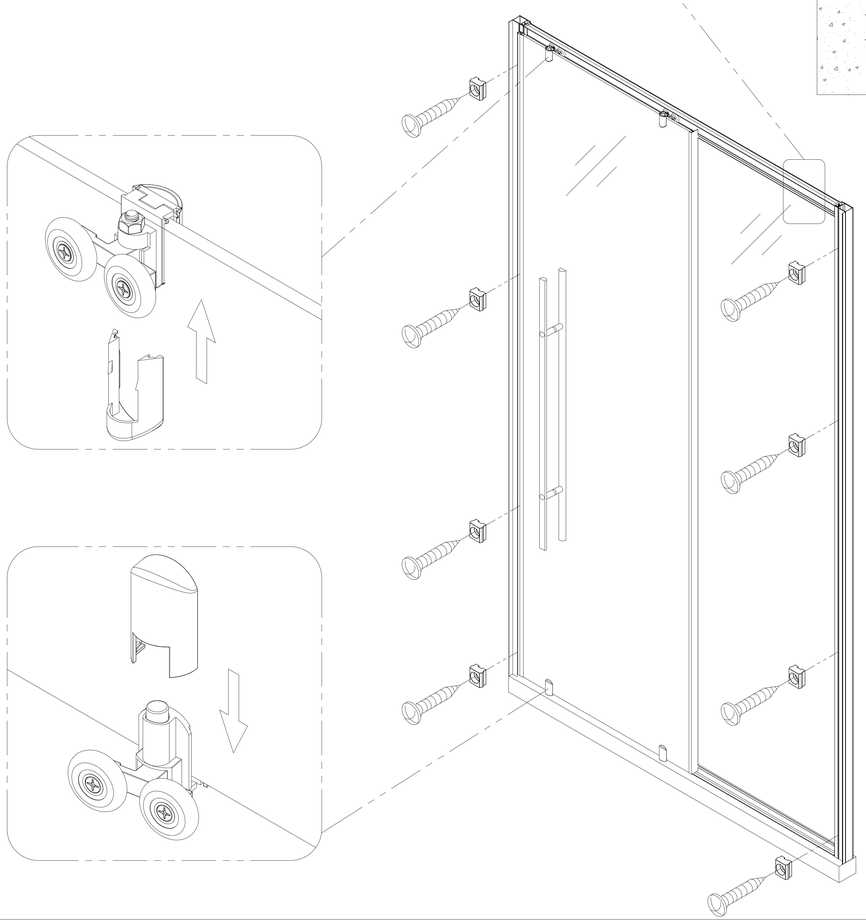

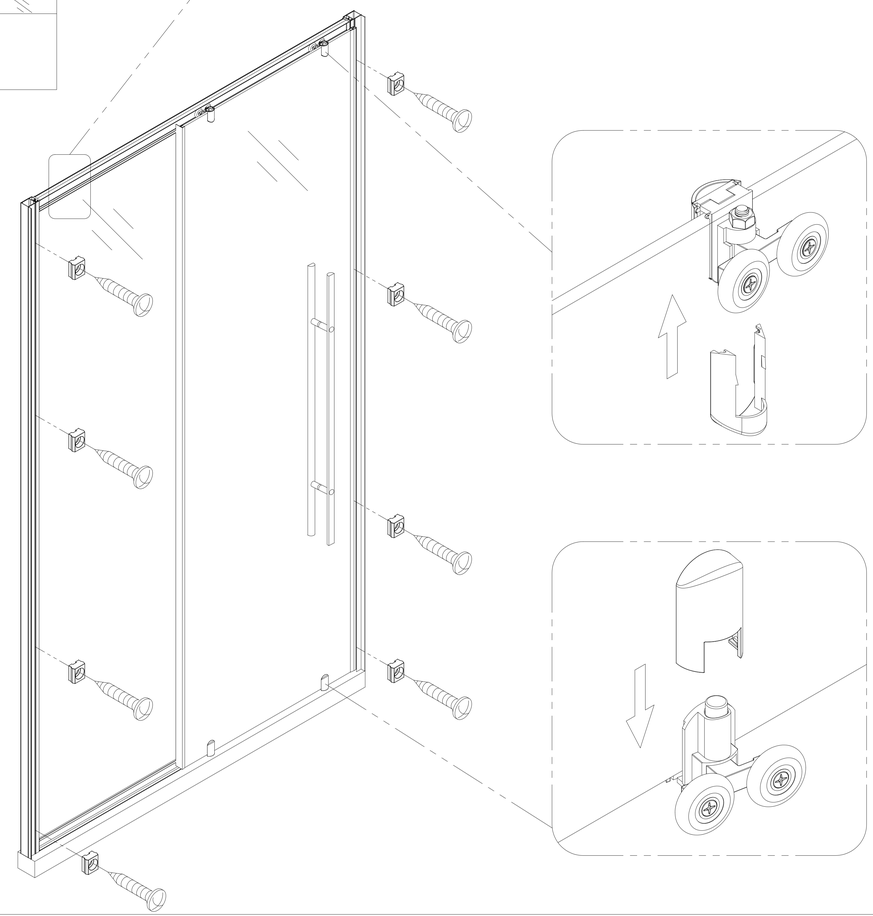

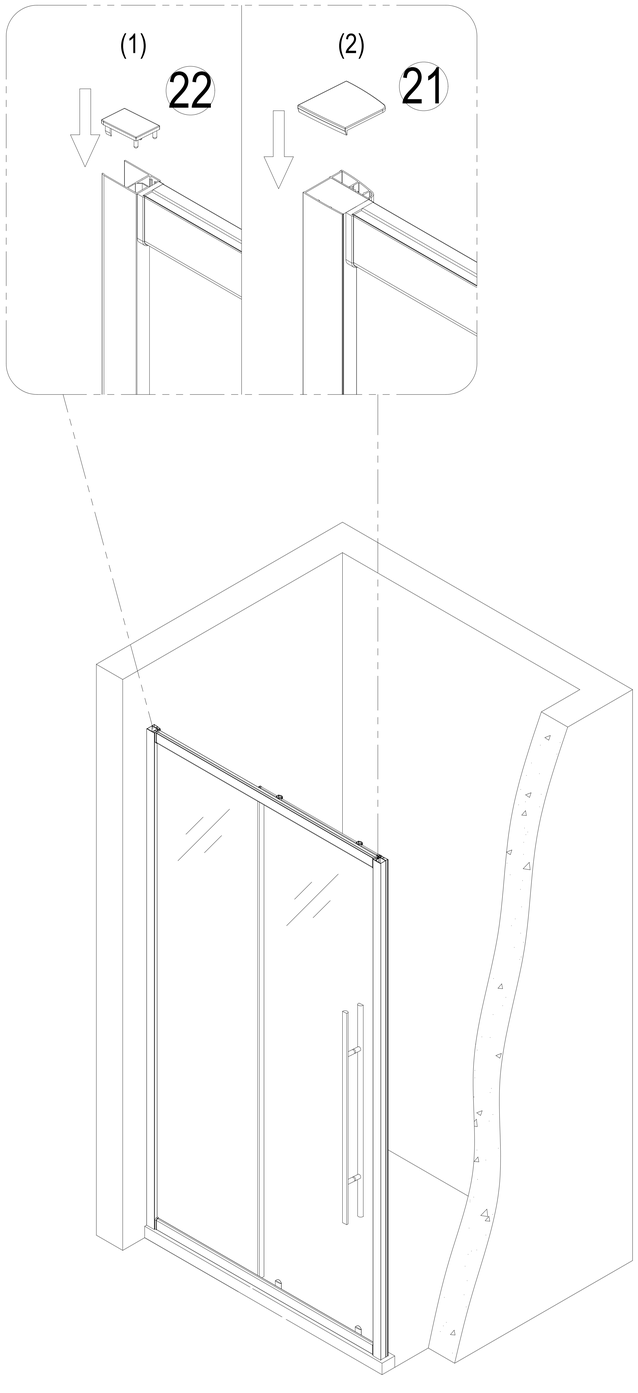

8

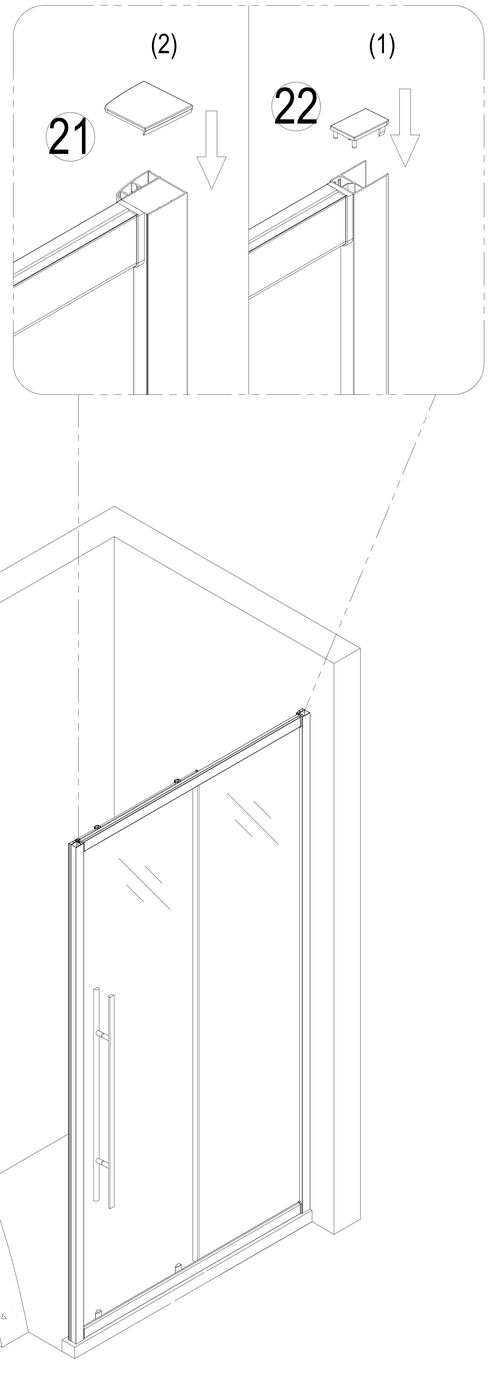

Care Instructions:

Do not use your shower enclosure within 24 hours of assembly . Do not use caustic cleaning products or abrasive material when cleaning your shower enclosure.

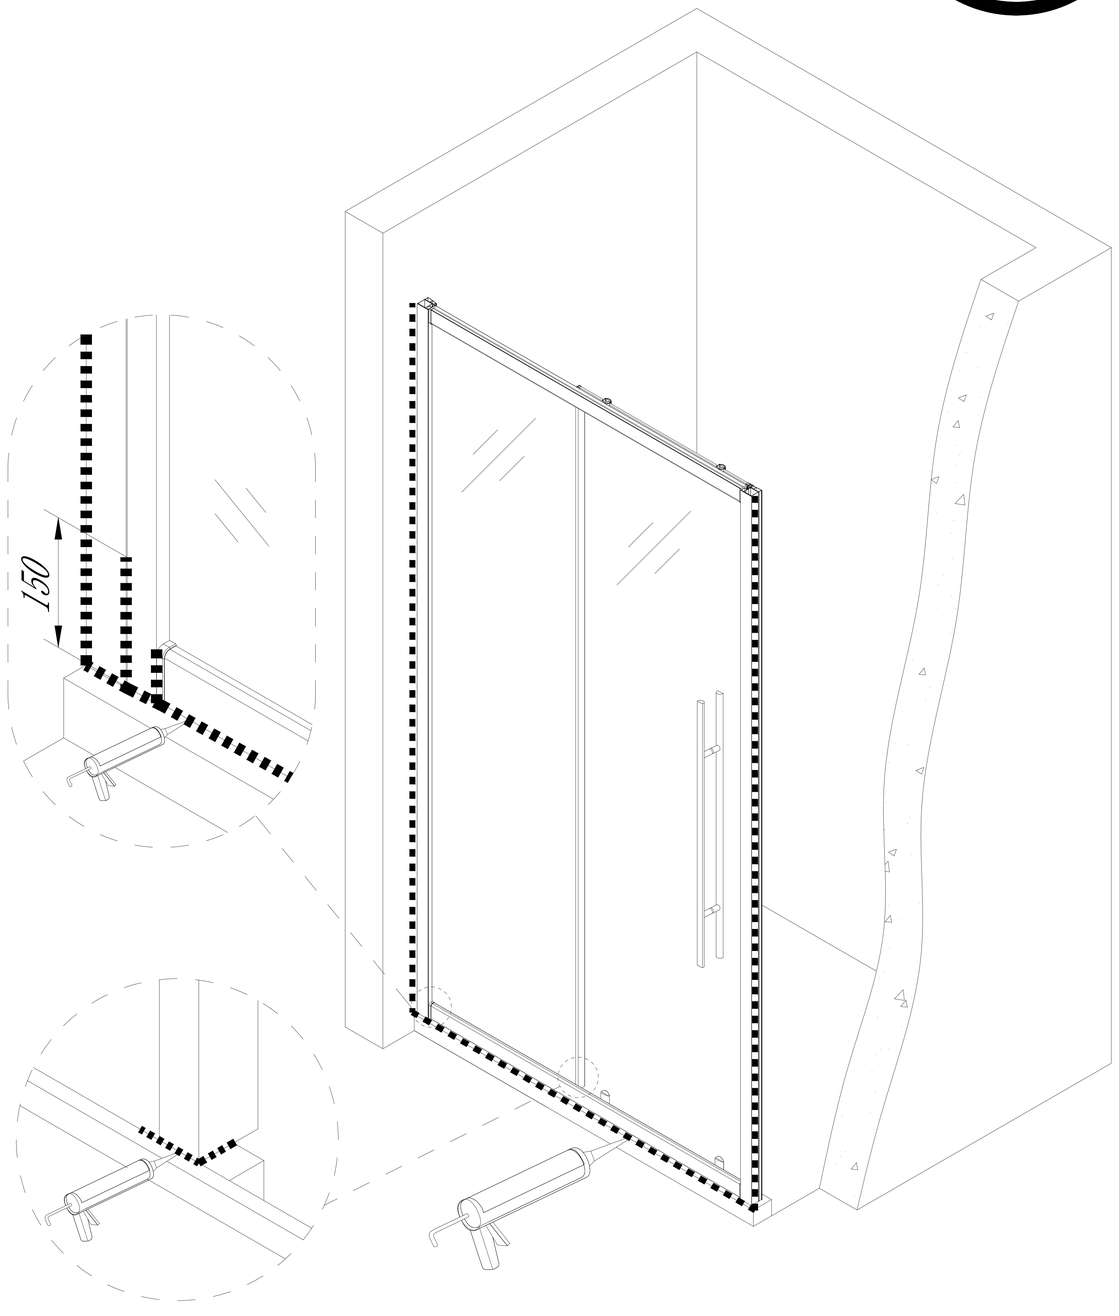

9

Care Instructions:

Do not use your shower enclosure within 24 hours of assembly . Do not use caustic cleaning products or abrasive material when cleaning your shower enclosure.

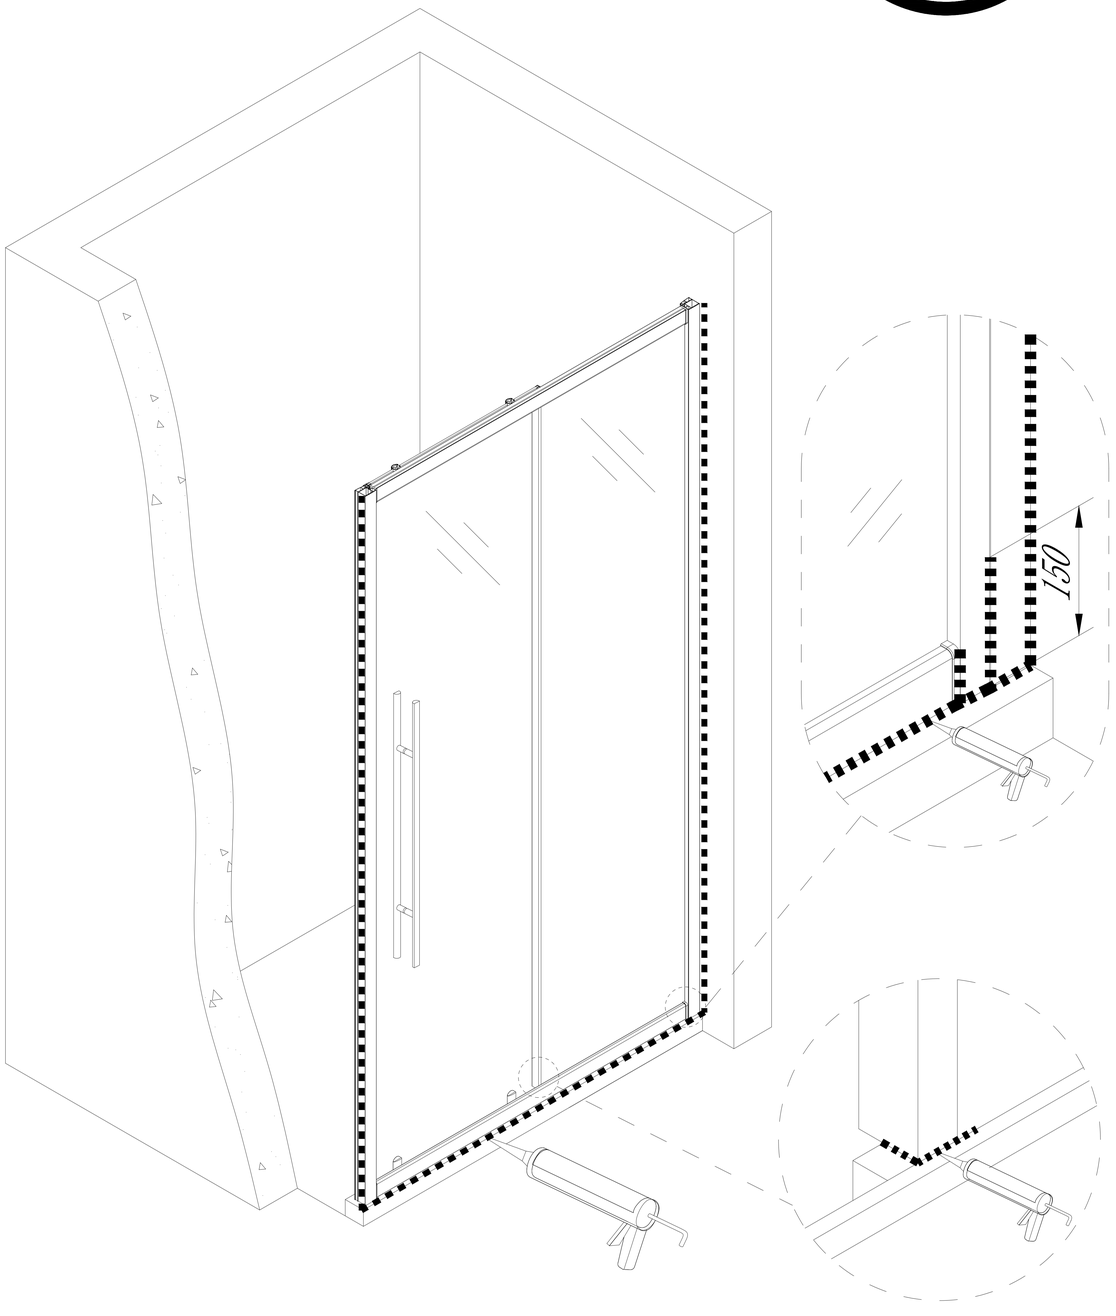

Eastbrook Road, Gloucester GL4 3DB

Technical Helpline: 01452 317890

Email: technical@eastbrookco.com

Cleaning and Maintenance of Shower Enclosures

Do not clean the shower enclosure with irritant detergents such as alcohol, bleach or other chemical cleaners.

Only clean with mild soapy water or a proprietary cleaner where the label advises it is suitable for the materials the enclosure if constructed from. Test on a small area first.

For treating limescale we would recommend distilled vinegar in a half and half solution with water.

Following installation should you find that there is a notable noise when the glass door moves you may add a small amount of silicon lubricant onto the roller wheels and tracks, hinges or clips.

It is the responsibility of the product owner to maintain the product as recommended above. Also, to check for parts which have broken or become loose to protect against failure of the enclosure.