

## **CONGRATULATIONS**

You are the proud owner of an exclusive Weston Designer Radiator which has been specially produced by our craftsmen who would wish you to enjoy many years of satisfaction from it.

## **INSTALLATION**

This product must be installed by a fully qualified engineer.

- Please consider using an Eastbrook Valve Set – this will ensure that your radiator looks its best with matching radiator valves.
- On commissioning, flush the central heating system thoroughly using a proprietary solution to ensure that aggressive substances such as fluxes and manufacturing residue, from which internal surfaces of your radiator can sustain irreparable damage – are removed. It is further recommended that an appropriately approved corrosion inhibitor be subsequently added to the heating system in order to protect the radiator and other parts of the central heating system to promote extended operating lifespan.

## **MAINTENANCE**

- From time to time it is advisable to clean your towel rail with a warm damp cloth. Never use any form of abrasive cleaner or chemical.
- Corrosion inhibitor must also be regularly maintained, please consult your engineer for details.

## **IMPORTANT**

Weston Designer Radiators are not suitable for use on direct central heating systems. Please consult your engineer or supplier.

## **WARRANTY**

Your Weston Designer Radiators is fully warranted for five years in respect of defective materials and workmanship and subject to installation being carried out by a qualified engineer in accordance with good practice and corrosion inhibitors being regularly maintained.


**REMEMBER** ..... Excellence is worth looking after.

**HELPLINE Phone : 01452 317890**


**HELPLINE email : [technical@eastbrookco.com](mailto:technical@eastbrookco.com)**

# Weston 1190x590


**1** Drill the holes for the wall plugs with a Ø 10 mm drill bit as illustrated in the figure.

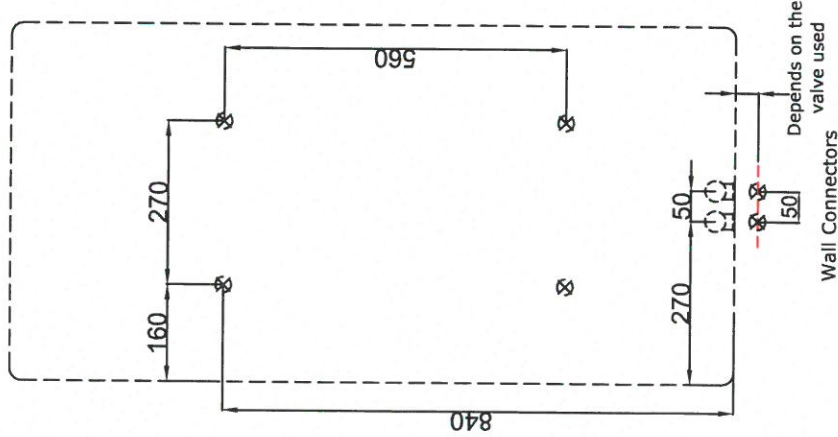


**2** Fix the wall mounting apparatus on the wall as illustrated.

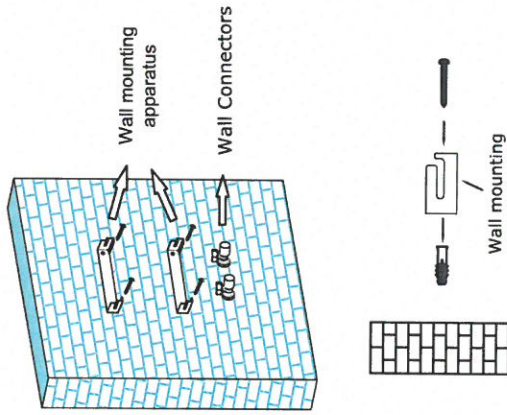

**3** Fix the panel mounting apparatus to the back of the product as illustrated. If the optional towel hangers are not used, the supplied washers must be used. Do not take off the edge and surface protective materials until all plumbing work is finished.

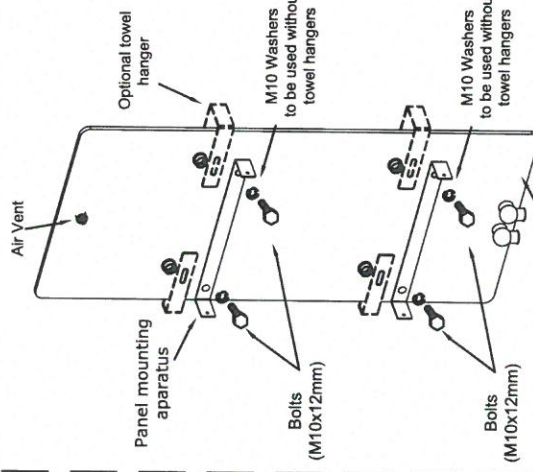


**4** Hold the product carefully and insert the panel mounting apparatus into the wall mounting apparatus and then fix it by tightening the bolts.

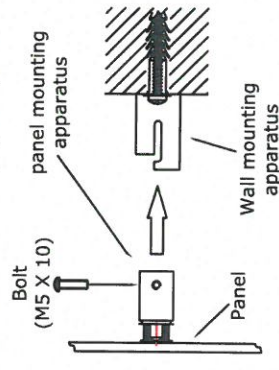

**Cross Section**

**5** Complete plumbing connections as shown in the figure

## Plumbing Figure

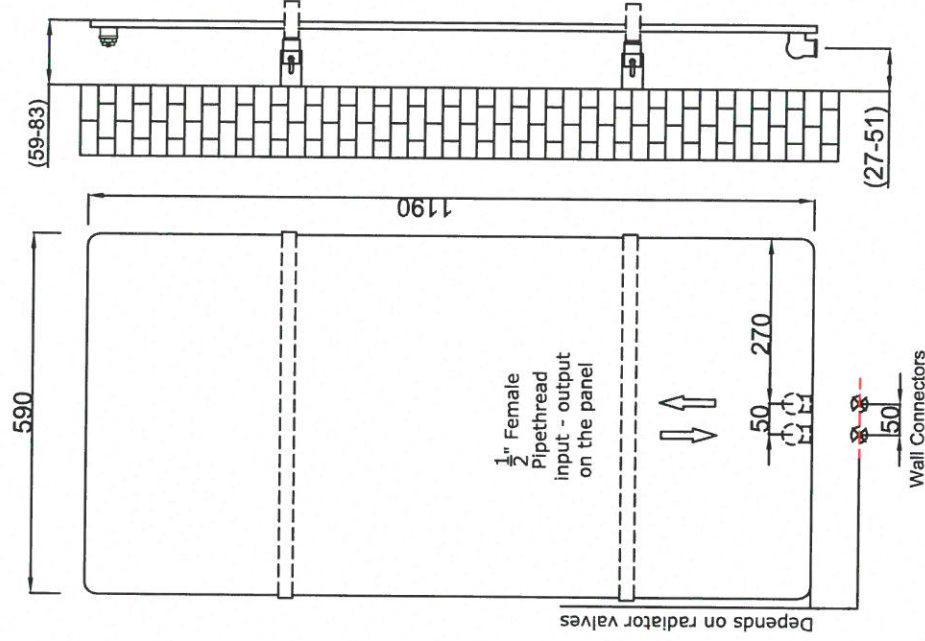

Determine the position of the product according to the water inlet - outlet dimensions stated in the figure.

**Eastbrook**