


INSTALLATION MANUAL

ADVANTAGE SHOWERSCREEN

Eastbrook

Eastbrook Road, Gloucester GL4 3DB
Technical Helpline: 01452 317890
email: technical@eastbrookco.com


| Eastbrook Code | Adjustment |
|----------------|------------|
| 58.712 | 800-820 |

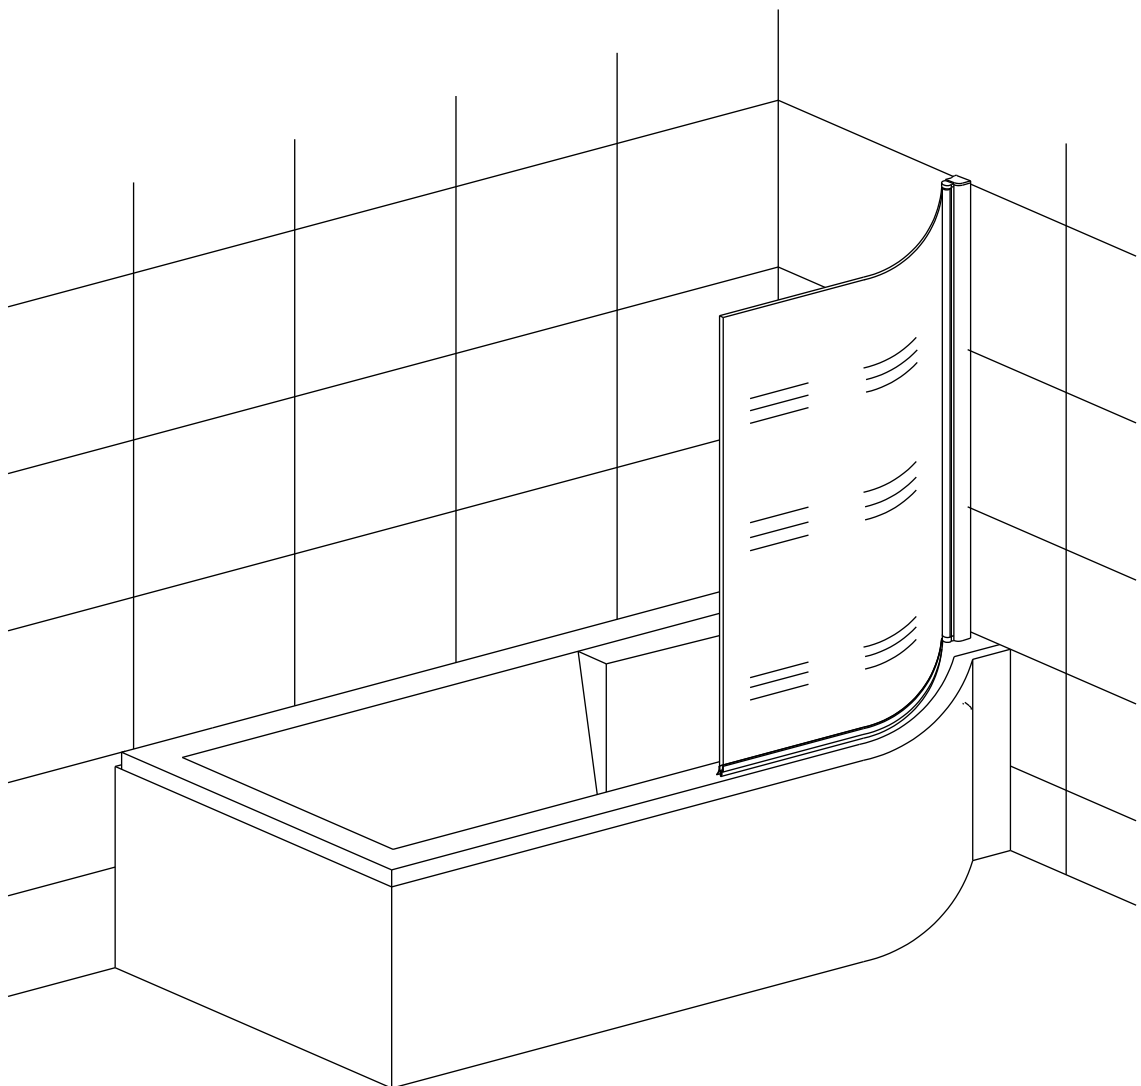


TOOLS REQUIRE




Pencil




(ø6.ø3.2)bit drill



Silicone gun




Flat and cross
screwdriver




Tap measure




Level ruler



Drill machine




Spanner




Rubber hammer


SPARE PARTS




A




B




C




D




E




F




G




H




I




J




K




L

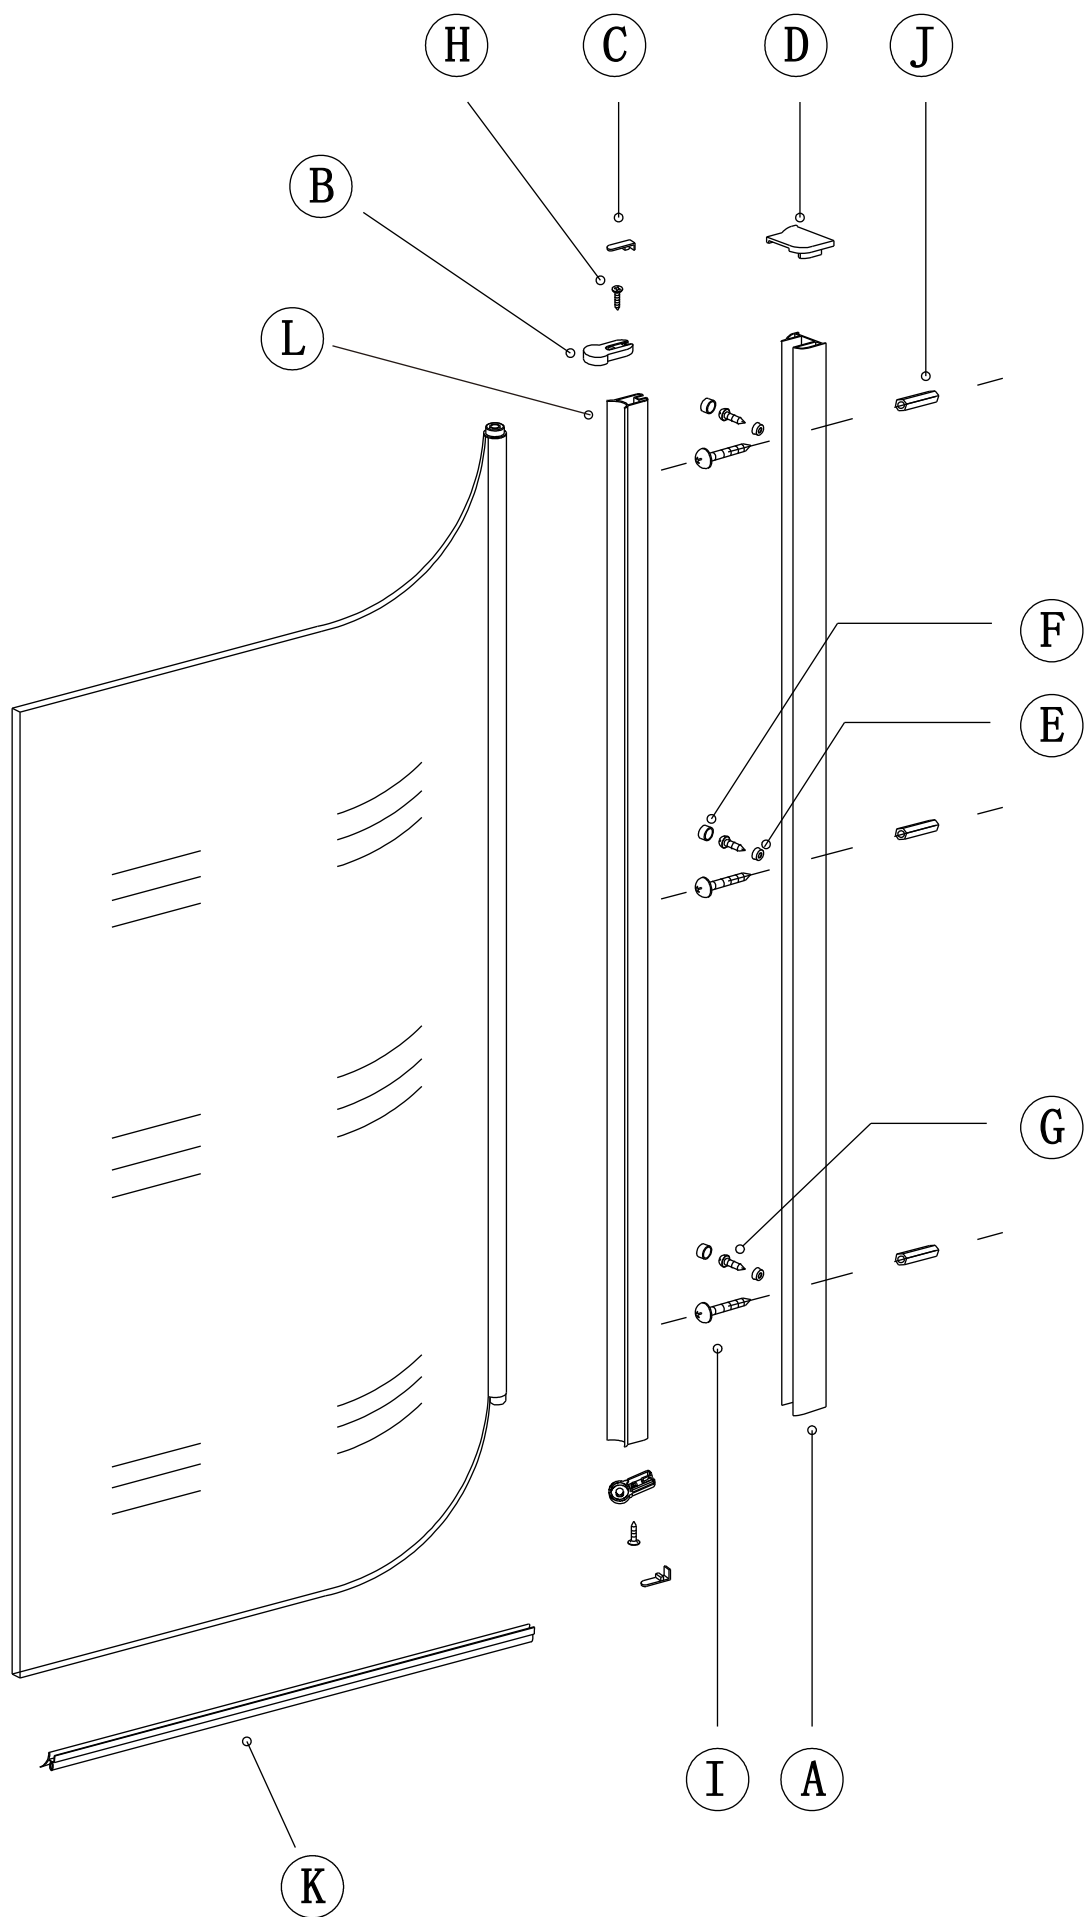


1

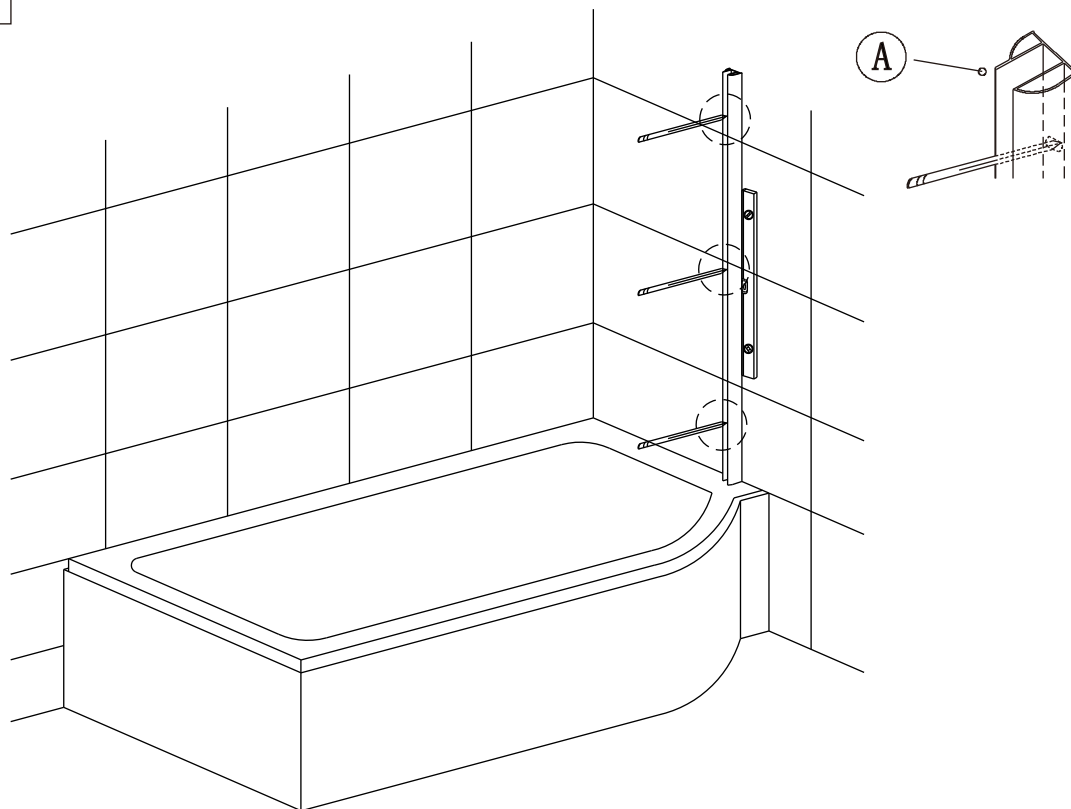


2

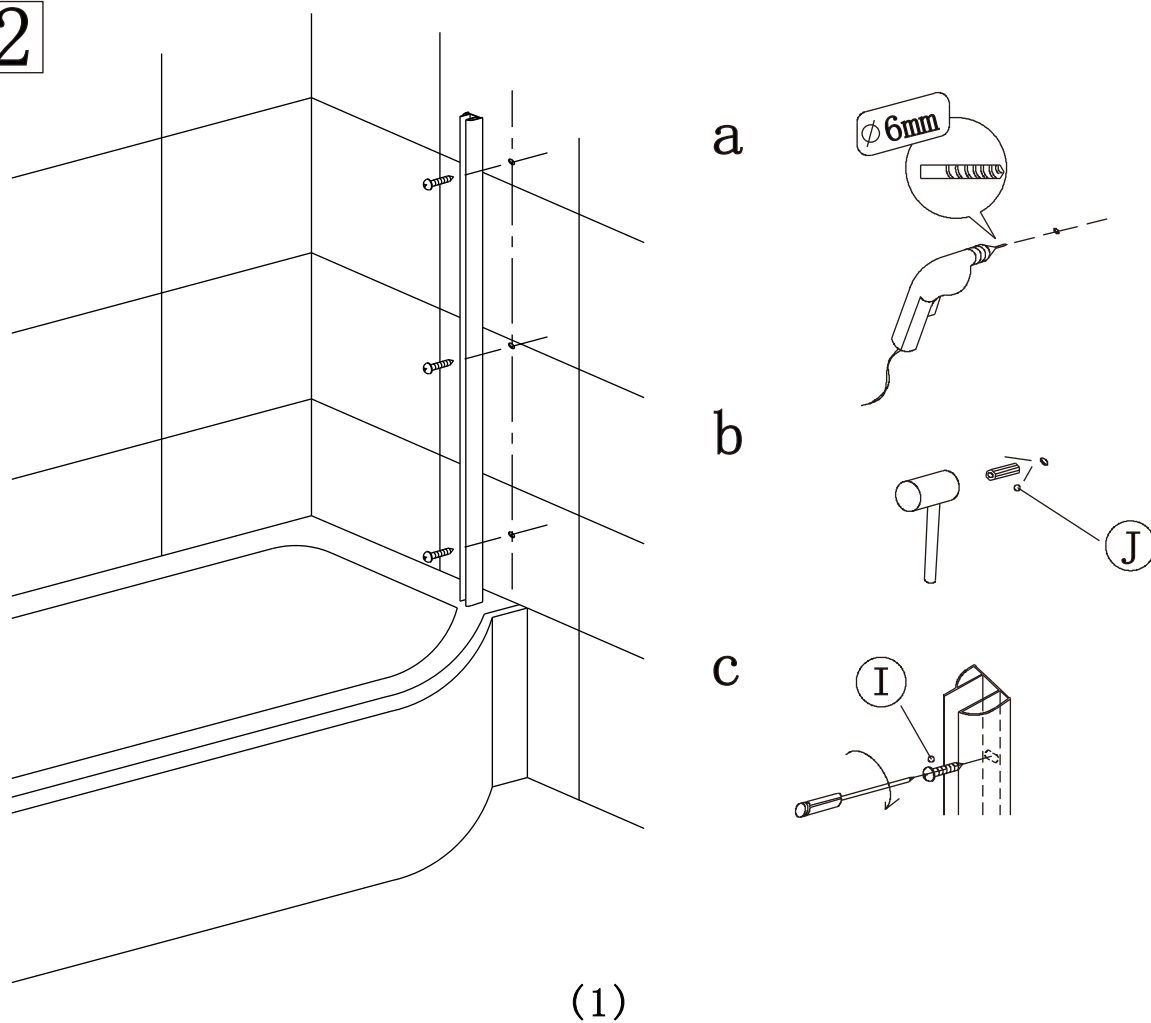


3

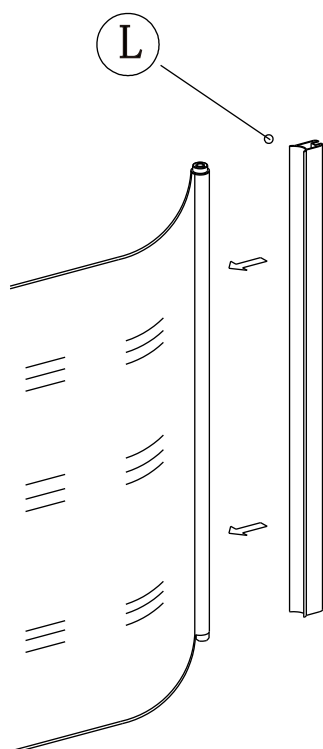

4

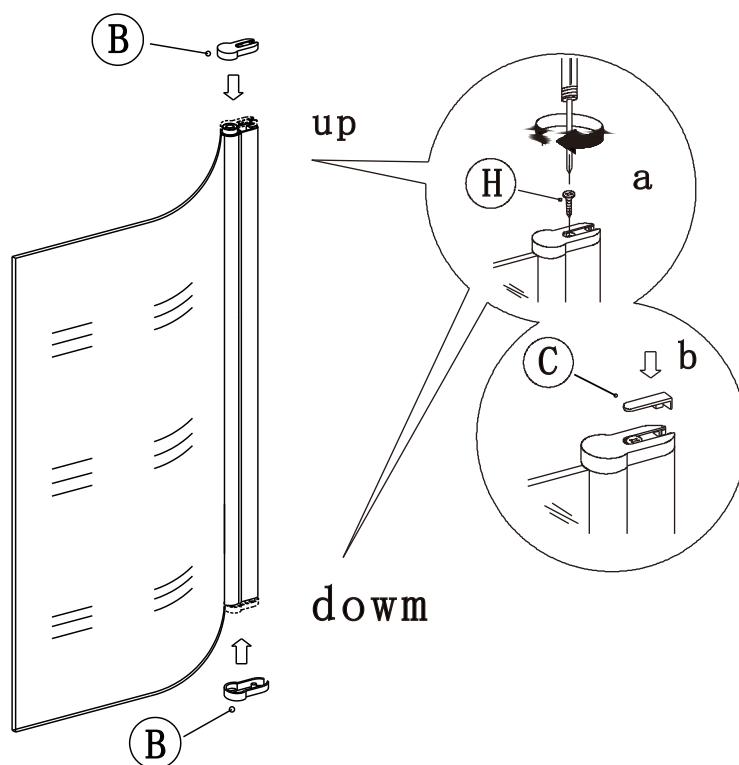


5

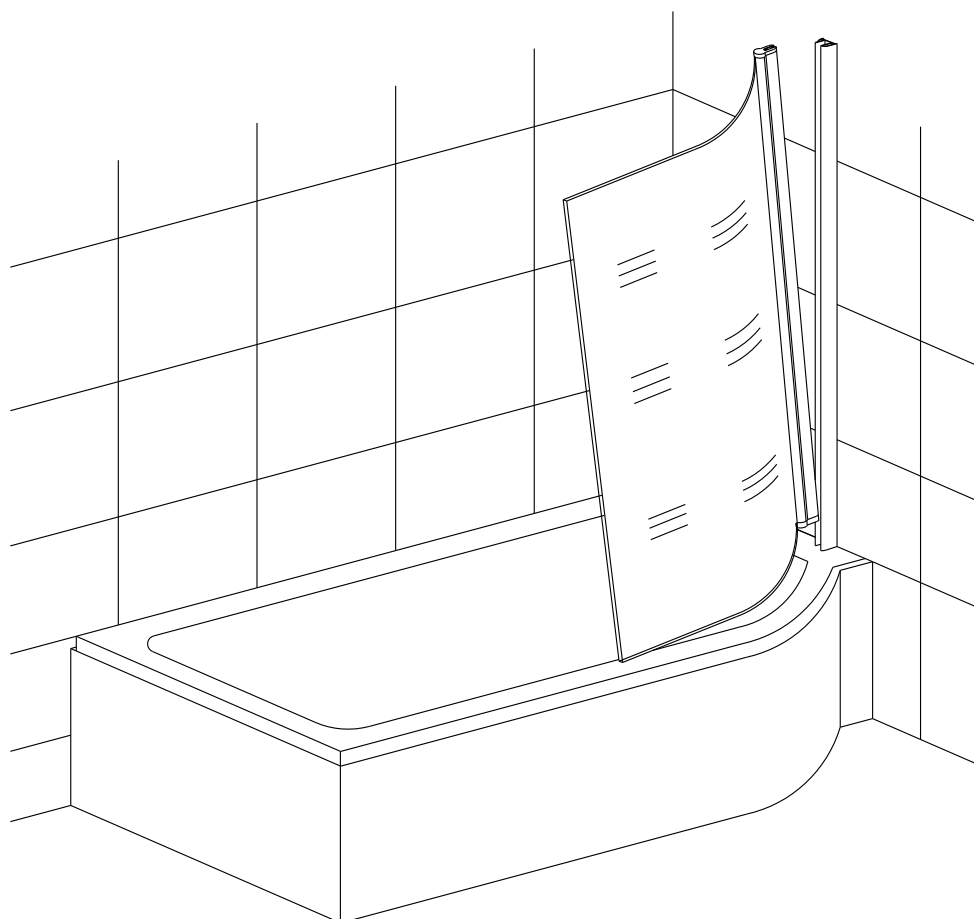


(2)

6

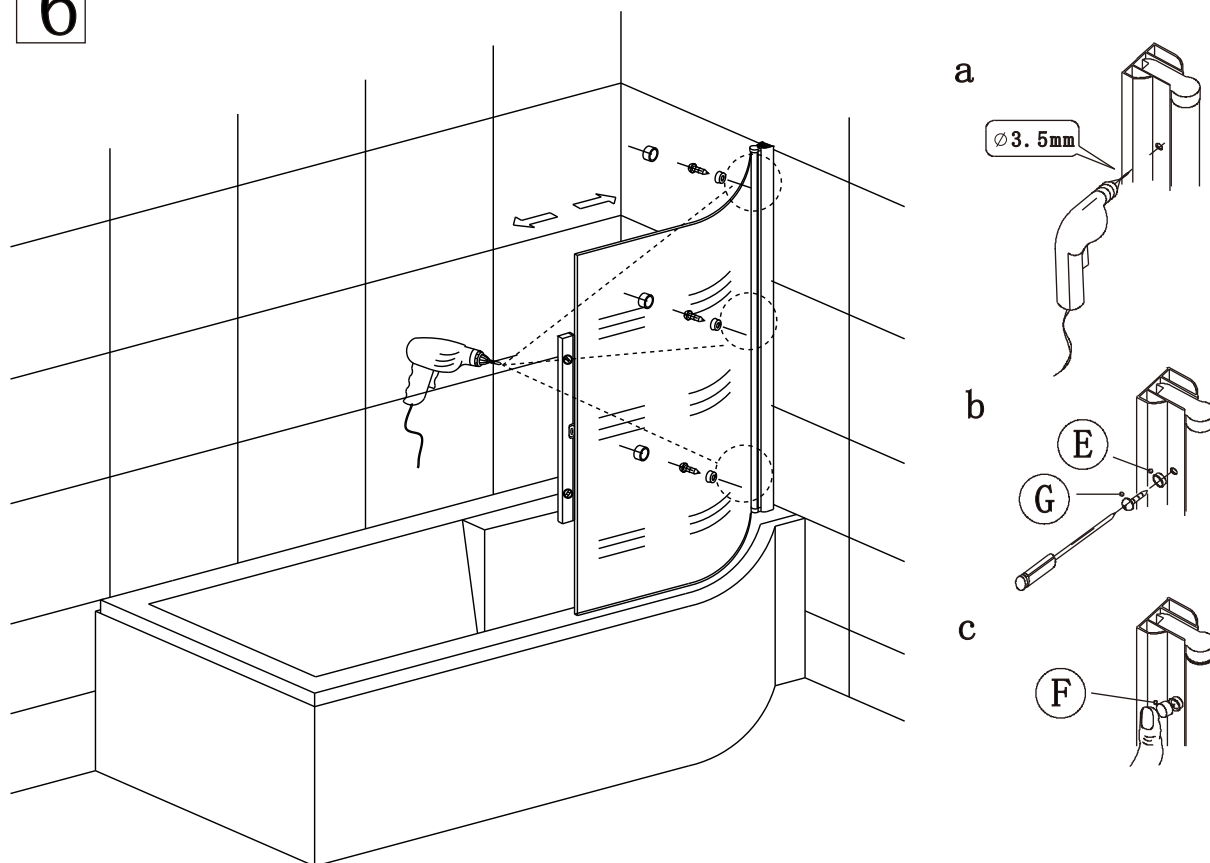


7

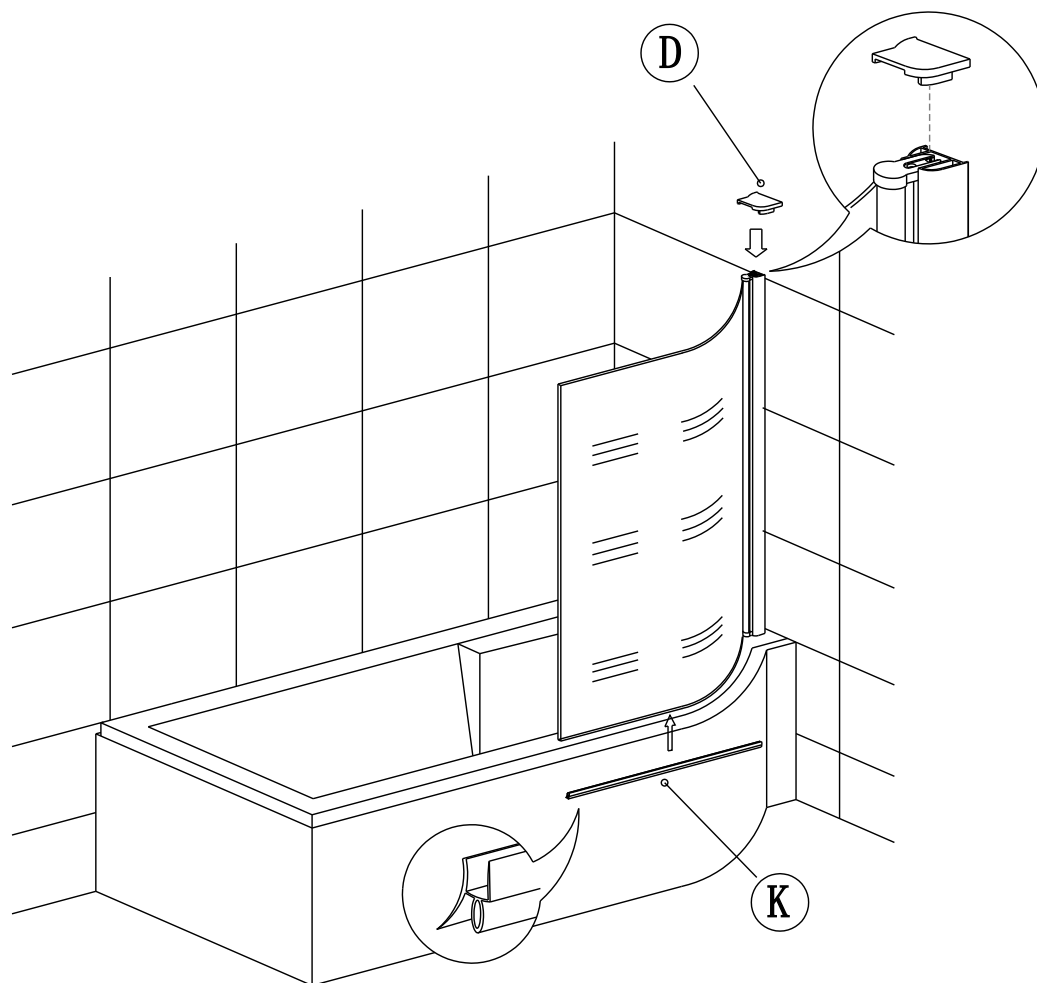

(3)

8

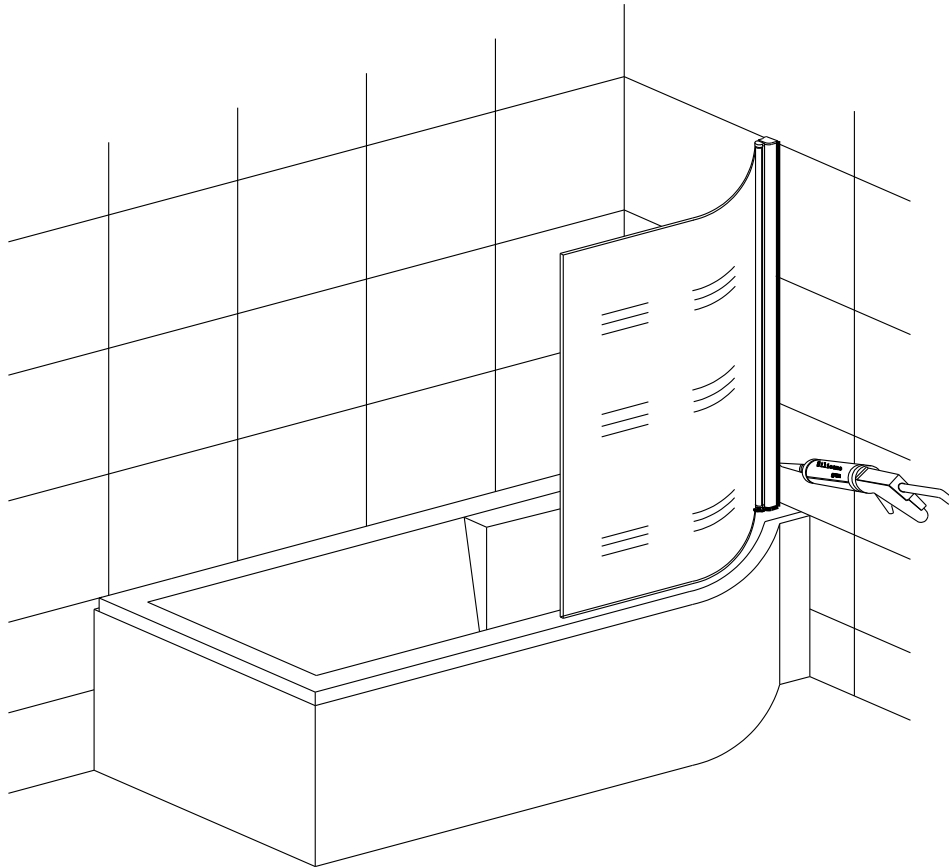

Please ensure silicone sealant is on the outside only.

Cleaning & Maintenance

Don't clean the shower enclosure with irritant detergent such as alcohol, bleach or other chemical cleaners.

Only clean with warm soapy water.

After the installation is completed, should you find that there is notable noise when the glass door moves, you may add a small quantity of lubricant onto the roller wheel, slipping hook and the track.

Helpline: 01452 317890

(4)