



carron

MADE IN BRITAIN



**Whirlpool
Installation
& User Guide**

PLEASE READ THIS LEAFLET BEFORE COMMENCING WITH THE INSTALLATION OF YOUR WHIRLPOOL BATH

Carron Bathrooms Ltd. whirlpools are supplied, factory fitted and tested with all necessary ancillary fitments, together with all components. The whirlpool pump comes pre-fitted to ease installation.

Any marks, defects or damage must be reported immediately to your supplier prior to the installation of the whirlpool bath.



The installation of the whirlpool bath must be in accordance with the relevant IEE electrical regulations and by-laws of the local water authority.

At no time should the system be lifted or moved by the pipework, whirlpool pump or pump support brackets.

To install the whirlpool bath into position please refer to the manufacturer's installation leaflet. When the bath is being installed, access to the pump must be considered. Failure to do so may invalidate your warranty. For further information please refer to your Warranty leaflet.

WIRING INSTRUCTIONS

Note: All electrical work must be carried out by a qualified electrician in accordance with IEE regulations. (17th Edition)

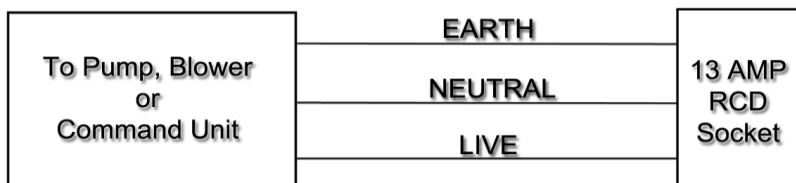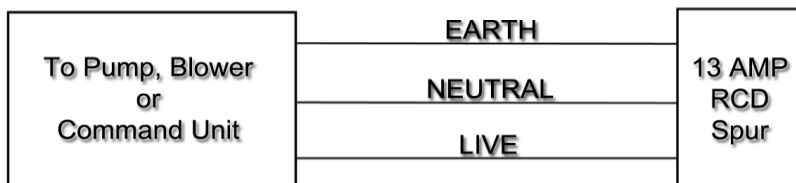

- 1 Both RCD spur or socket must be positioned outside the bathroom where the whirlpool is sited.

2. All metal tubes and fittings must be earth bonded in accordance with current IEE Regulations (17th Edition).

Your whirlpool bath is now ready for use. Turn on the taps and fill the bath until the water is at least 1 inch above the jets. Do not turn on the whirlpool with the water below this level, as the water from the jets can cause splashing outside the bath.

Run the whirlpool for 10 minutes to check for any leaks or faults prior to any tiling work needing done. If any problems are found contact your supplier immediately.

Press the On / Off button down fully to activate the system.

The Air Control can be used to increase or decrease the amount of air coming from the jets.

Never turn on the pump without water in the bath. This can damage the pump and will invalidate your warranty.

SAFETY

The pump and wiring should never be in an exposed position that allows a person, using the bath, to reach over and touch the equipment.
A panel should always be installed first, prior to using the bath or system.

It is recommended that the maximum time spent in a whirlpool is no longer than 30 minutes. Initially, shorter bathing times are recommended and build up to maximum over several weeks to allow the body to get used to the experience.

It is normal that regular cleaning of your whirlpool is carried out to prevent the presence and build-up of bacteria and grime, caused any body oils, dead skin, and soaps in the pump and pipework. It is recommended that the system is cleaned once a month with the use of whirlpool cleaner. This will be available from your bathroom centre or plumbers merchant.

HYDROTHERAPY

The whirlpool or spa benefits can be enhanced by the use of specially blended pure aromatherapy essences.

Normal bubble bath products will froth excessively and should not be used.

In general only those products specially designed for whirlpools should be used in the bath.

While enjoying the benefits of hydrotherapy, anyone undergoing treatment or has previously had a medical condition, we recommend you consult your doctor before using your whirlpool.

HOW TO CARE FOR YOUR CARRON BATH

Never Use Abrasive cleaners or powders

Never Use Cleaners containing bleach or any other products containing organic solvents.

Do not let the bath come in contact with nail varnish remover, acetone based solvents or paint strippers, as these could permanently damage the bath surface.

CLEANING

To retain the high gloss on the surface of your bath, clean the bath after use with warm soapy water, then wipe with a soft cloth.

A bathrooms cleaner may be used only if it is recommended for use with acrylic baths, eg. Cif Bathroom Cleaner.

REFURBISHMENT

Slight scratches and blemishes can be removed using mild abrasive, metal polish, or T-Cut. Apply with cloth folded into a pad, rubbing vigorously in a circular motion, then polish the compound off, using a soft cloth.

Carron Bathrooms Ltd.
North Carron Works
Stenhouse Road,
Carron, Falkirk
FK2 8UW

Tel - 01324 638 407
Fax - 01324 611 490