



Technical Parameters

1. Operating pressure is 0.5 Bar ~ 5 Bar, suggest pressure is 1 Bar ~ 5 Bar
2. Cold water supply temperature: 5 °C ~ 29 °C, hot water supply temperature: 55 °C ~ 85 °C;
3. The maximum outlet water temperature is 45 °C;


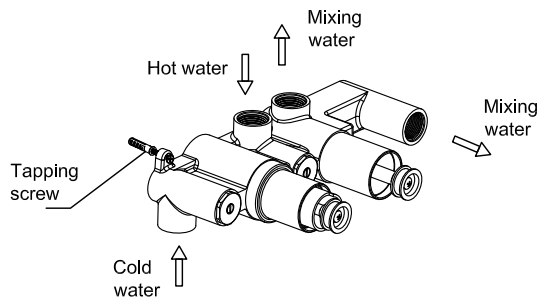


WALL BATH SPOUT


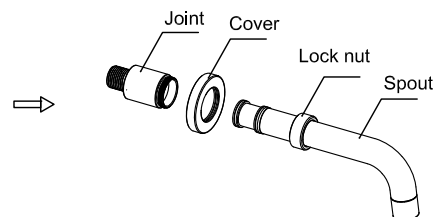


1. Position the Valve onto the wall and Connect the corresponding hot and cold water pipes according to the figure



2. Please disassemble the bath spout and then install it. The steps are as follows

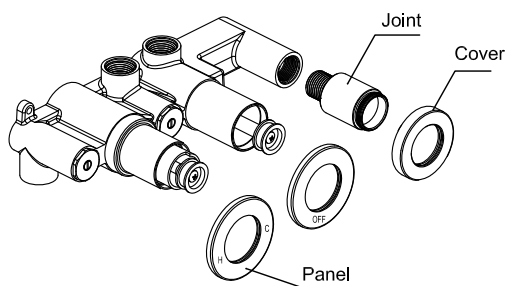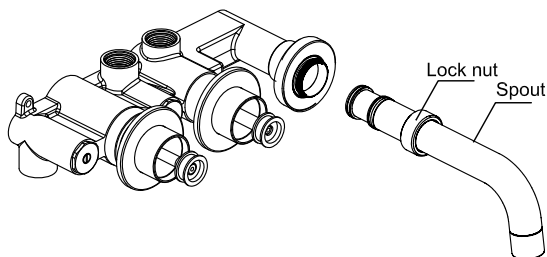

3. Screw the joint into the valve body, install the panel, then put on the cover, insert the spout, and finally lock the nut on the joint.

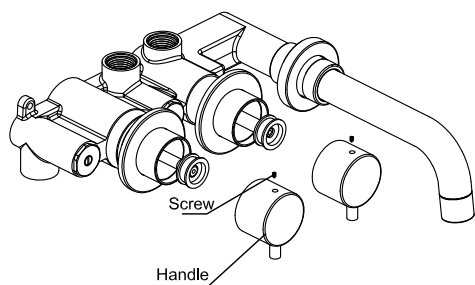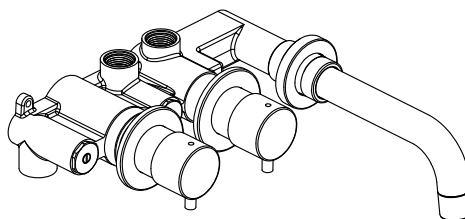

4. Fit the handle on the cartridge, tighten the screw with the supplied hexagonal key.

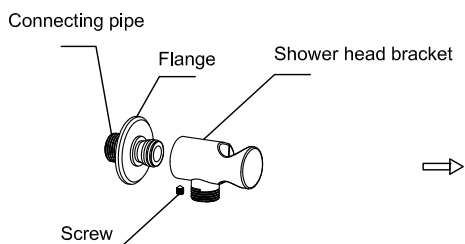

5. Fix the connecting pipe and the flange to the wall, insert the shower bracket, adjust the position, screw it tightly, and finally install the shower handset and the shower hose