

CONGRATULATIONS

You are the proud owner of an exclusive Witney Aluminium Radiator which has been specially produced by our craftsmen who would wish you to enjoy many years of satisfaction from it.

INSTALLATION

This product must be installed by a fully qualified engineer.

- Please consider using an Eastbrook Valve Set – this will ensure that your radiator looks its best with matching radiator valves.
- On commissioning, flush the central heating system thoroughly using a proprietary solution to ensure that aggressive substances such as fluxes and manufacturing residue, from which internal surfaces of your radiator can sustain irreparable damage – are removed. It is further recommended that an appropriately approved corrosion inhibitor be subsequently added to the heating system in order to protect the radiator and other parts of the central heating system to promote extended operating lifespan.

MAINTENANCE

- From time to time it is advisable to clean your towel rail with a warm damp cloth. Never use any form of abrasive cleaner or chemical.
- Corrosion inhibitor must also be regularly maintained, please consult your engineer for details.

IMPORTANT

- Maximum working pressure of this radiator is 4 bar.
- This radiator is to be used on Domestic Central Heating systems only. (Not suitable for use on direct hot water systems). Please consult your engineer or supplier.

WARRANTY



Your Witney Aluminium Radiator is fully warranted for five years in respect of defective materials and workmanship and subject to installation being carried out by a qualified engineer in accordance with good practice and corrosion inhibitors being regularly maintained.

REMEMBER Excellence is worth looking after.


Wall Fixing Set includes;	
2	Bracket (a)
4	Plastic buffer (b)
6	Wall Screw (c)
6	Wall Plug (d)
1	Flow Diverter (e)

Bleed valve & blanking plug come installed on the radiator.

Witney 1800mm Height radiators and 600x470mm horizontal radiator

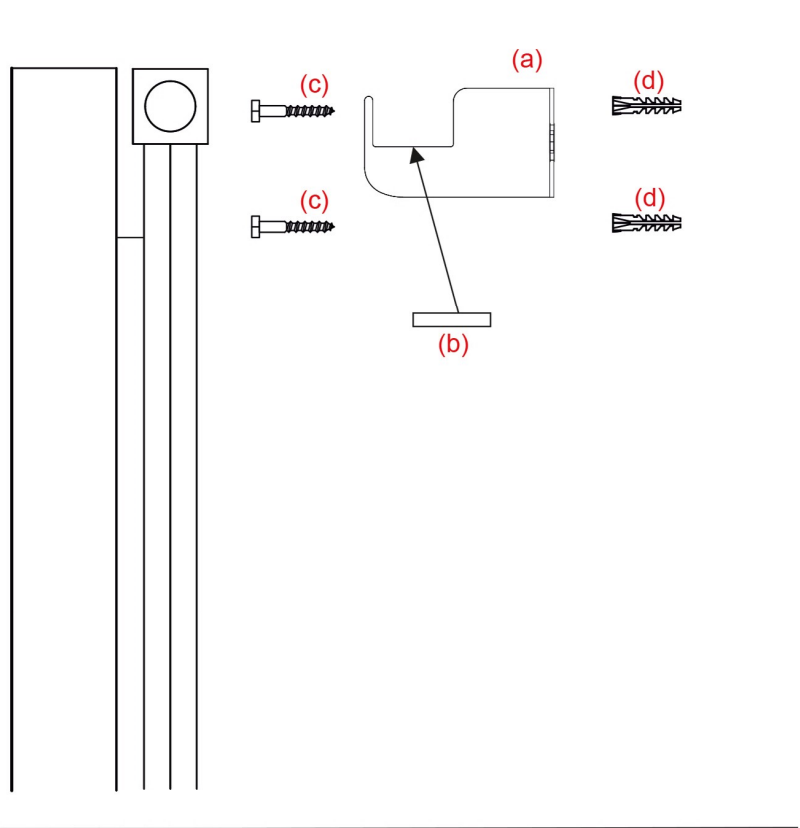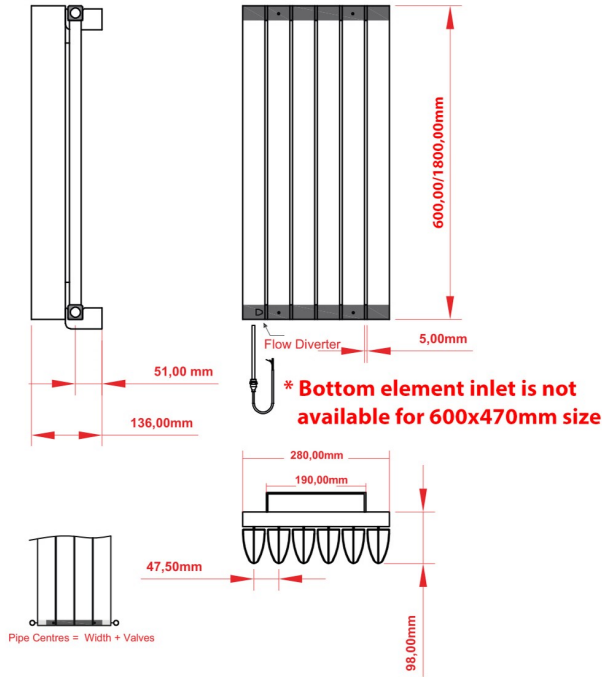


Heating element

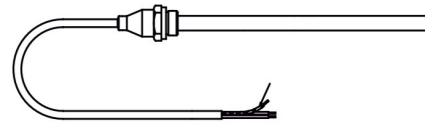


Heating Element and Towel Hanger sold separately

Witney 600mm Height / 660-850-1040-1230mm width radiators

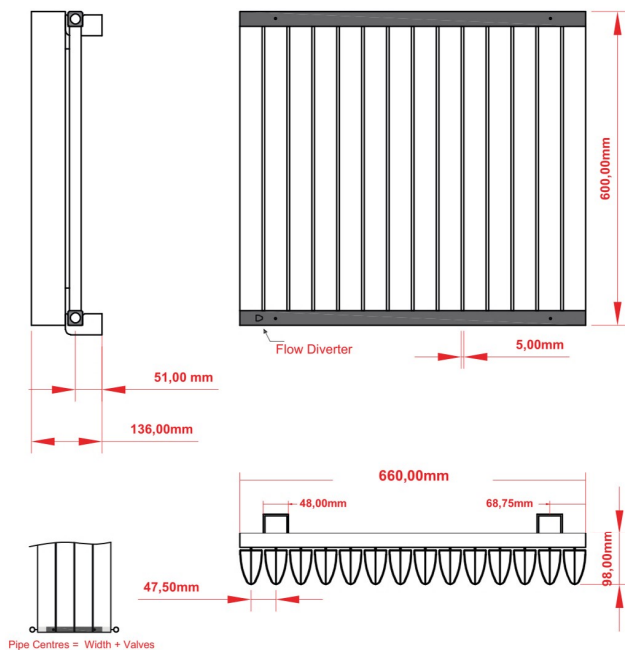

How to install Flow Diverter

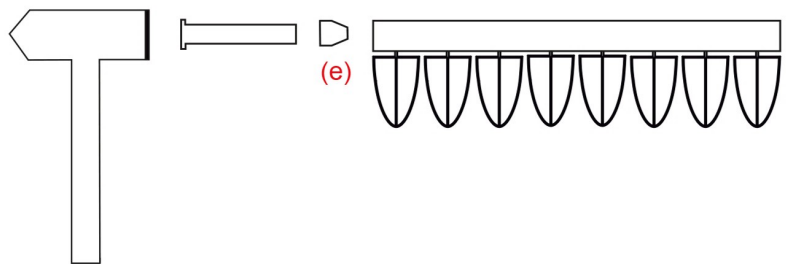

*Diverter should be installed into the flowside of the radiator.

	Install the flow diverter						
	Between the first and second profile			Between the second and third profile			
Profile Quantity	6	8	10	14	18	22	26
W (mm)	280	375	470	660	850	1040	1230