

Pre-installation preparation:

- Remove the tap and filter from its packaging, check for any transport damage and that all parts are present.
- Shut off the mains water supply; switch off the water heating system, and open hot and cold taps at the lowest point in the building. Allow them to run until empty.
- Remove the old tap and prepare a 35mm diameter hole for the tap, note the tap must not pass through a surface thicker than 40mm.
- Prepare the existing pipework so the hot and cold 15mm copper feed pipes finish below the tap base. Typically the hot water feed should be on the left hand side, we recommend fitting isolation valves before the tap connections to ease any future maintenance. Any debris or swarf that may be in the feed pipes must be flushed to prevent damage to the tap.

Stage 1 – install the tap:

1. Screw the hollow fixing stud (F) into the base on the tap using a spanner or 6mm allen key. Note: the drawing identifies the water inlets, viewed from the base of the tap.
2. Screw the Cold and Hot tail pipes (J & K) into the base of the tap.
3. Place the upper seal (B) on to the base of the tap (A).
4. Place the tap centrally and straight to the tap hole, passing the hollow fixing stud (F) and tail pipes (J & K) through the sink.
5. Pass the triangular plate (C), rubber horseshoe (D) then the metal horseshoe (E) over the hollow fixing stud (F).
6. Using a spanner tighten fixing nut (G) onto the hollow fixing stud (F), a box spanner or small basin wrench will help if one is available.
7. Place fibre washer (H) into adaptor (I), tighten the adaptor (I) with its flats nearest to the tap onto the hollow fixing stud (F).
8. Attach the hot water tail pipe (K) to the water supply pipe using a 15mm compression nut and olive (not supplied).
9. Attach the 3-way valve (11) to the cold water feed pipe using compression nut (9) and olive (10).
10. Attach the 3-way valve (11) to the cold water inlet pipe (J) using a short length of 15mm pipe, compression nut and olive (not supplied).

Stage 2 – install the filter:

1. Locate a convenient position to install the filter (6&7). Leave some room underneath the filter unit (7) to allow it to be changed.
2. Screw the filter bracket (5) to the cupboard wall using screws (3).
3. Screw bracket (5) to the filter head (6) using screws (4). Note: the filter head has numbers stamped into its top, number 3 is the unfiltered water inlet and number 1 is the filtered water outlet. The direction of flow is also marked.
4. Write the date of installation onto the label on the filter cartridge (7)
5. Insert the filter cartridge (7) into the filter head (6). Align the tabs at the top of the filter cartridge (7) with the gaps in the base of filter head (6), push the filter cartridge (7) up into the filter head (6) then turn the filter cartridge (7) approximately 90° to lock it into place.
6. Screw the pushfit fitting (1) into the adaptor nut (I).
7. Cut the blue flexible pipe (2) so it is slightly longer than the required lengths to and from the filter unit. When cutting the pipe use a sharp Stanley or craft knife, ensuring that the pipe is cut cleanly and square at all ends.
8. Firmly push the blue pipe (2) apx. 12mm into the pushfit adaptor (8) then into the inlet (stamped 3) on the filter head (6).
9. Firmly push the blue pipe (2) apx. 12mm into the pushfit fitting (1) then into the outlet (stamped 1) on the filter head (6).


Stage 3 – setting the tap up:

Slowly turn the hot and cold water supply on; now carefully check the system for any leaks.

Turn your filter tap on by turning the top section of the body clockwise so filtered water runs through it. Note: when the filter is new it will take a moment to push any air through the system, you may notice some discoloration in the water at this point, this is normal and will pass with flushing.

The filtered drinking water system performs at a maximum of 2-3 L / min. Turn the mixertap fully on to filtered water, now turn the lever on the three way valve (11) to adjust the flow of filtered water to the correct level.

Clean the tap to remove any marks created during installation as instructed then replace the bag that has been provided to protect the tap until it is ready for use.

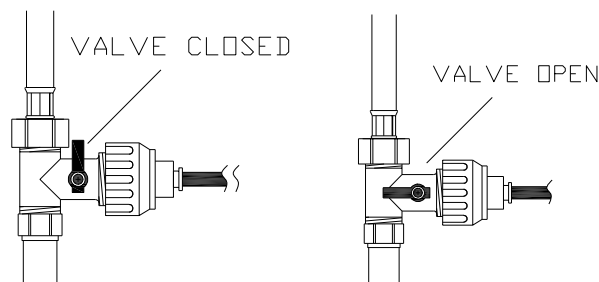

Using the tap:

For best results when using the filtered water always run the tap for a few moments. Running the tap will help to flush the system through and make the water cooler for drinking. When comparing the taste of filtered and unfiltered water always taste the filtered water first.

The triple stage filter is designed to improve the taste, clarity and odour of drinking water, the filter also reduces sediment, the level of chemical impurities and lime scale build up on kettles and cookware. Each filter cartridge has a maximum six month life depending upon your water quality.

For replacement filters call 01226 28 34 34. Abode operate a free replacement filter reminder service, If you would like to take advantage of this service please fill in the enclosed card.

5 Year warranty Terms and Conditions

In the unlikely event that you should experience any defect in the materials or workmanship of your new Abode mixer within 5 years of purchase, the purchaser's sole remedy shall be the replacement (at the manufacturer's discretion) of all or any part of the product that is defective. All working parts and valves are guaranteed for a period of 5 years from purchase. Decorative surface finishes and O-rings are guaranteed for 1 year from the date of purchase provided that our advice concerning care has been observed and no scouring agents have been used. This is provided that the mixer or tap has been used for normal domestic purposes and that the care, installation and maintenance instructions have been observed. The warranty extends to the original purchaser only.

Marks, scuffs and scratches caused by improper installation or accidental damage are not covered by this guarantee. Neither are shade variations or any damage or defect caused by incorrect installation or abuse of the fitting.

As we are continuously improving and developing our range of products, finishes & colours, in the event of a valid claim, we may not be able to provide an identical replacement for the defective product throughout the guarantee period. Where an identical product is no longer available, we will supply the nearest equivalent from our then current product range. In assessing your claim, we must be given the opportunity to inspect the product as installed prior to removal. Any product returns must be packaged as received and complete.

No other warranties, express or implied, are made, including merchantability or fitness for a particular purpose. Under no circumstances shall the manufacturer be liable for any loss or damage arising from the purchase, use or inability to use this product, or for any special, indirect, incidental or consequential damages. No liability is accepted for consequential damage to other household fixtures, fittings or furnishings arising from this claim, even if attached to the product. No installer, dealer, agent or employee of Abode Home Products Limited has the authority to modify the obligations or limitations of this warranty.

