TAP3590 – Lugano monobloc

Key:	Description:	APX size (mm):	Base material	Colour:	QTY:
A1	Aerator housing	M18 M	Brass	Chrome	1
A2	Aerator	M15	Plastic	White/Grey	1
A3	Rubber gasket	15 OD x 3	Rubber	Black	1
A4	Spout	220 x 155	Brass	Chrome	1
A5	Spout locking collar	13.5 x 30	Brass	Chrome	1
A6	Anti friction split ring	3 x 23 OD	Plastic	White	1
A7	O-ring	3 x 23 OD	Rubber	Black	1
A8	O-ring	3 x 23 OD	Rubber	Black	1
B1	Body	80 x 150	Brass	Chrome	1
B2	Base plinth	5 x 48	Brass	Chrome	1
B3	Upper seal	2 x 43 OD	Rubber	White	1
C1	Cold handle	30 x 18	Zamak	Chrome	1
C2	Grub screw	6 x 4	Steel	Steel	1
C3	Cold valve	½" CD, length 46	Brass	Brass	1
D1	Hot handle	30 x 18	Zamak	Chrome	1
D2	Grub screw	6 x 4	Steel	Steel	1
D3	Hot valve	½" CD, length 46	Brass	Brass	1
E1	Fixing stud	M8 x 140	Steel	Silver	1
E2	Stabiliser plate	88 x 58	Plastic	White	1
E3	Lower gasket	45 OD x 3.5	Rubber	Black	1
E4	Metal horseshoe	51 x 5	Steel	Silver	1
E5	Fixing nut	15 x 11 AF	Brass	Brass	1
F1	Hot flexible pipe	M10 x 370 x ½" BSP M	Stainless steel/Brass	Silver/red	1
F2	Cold flexible pipe	M10 x 370 x ½" BSP M	Stainless steel/Brass	Silver/blue	1
F3	Non return valve	16 x 15	Plastic	White	1
F4	Non return valve	16 x 15	Plastic	White	1

© Abode Home Products Limited

TAP3590 – Lugano monobloc

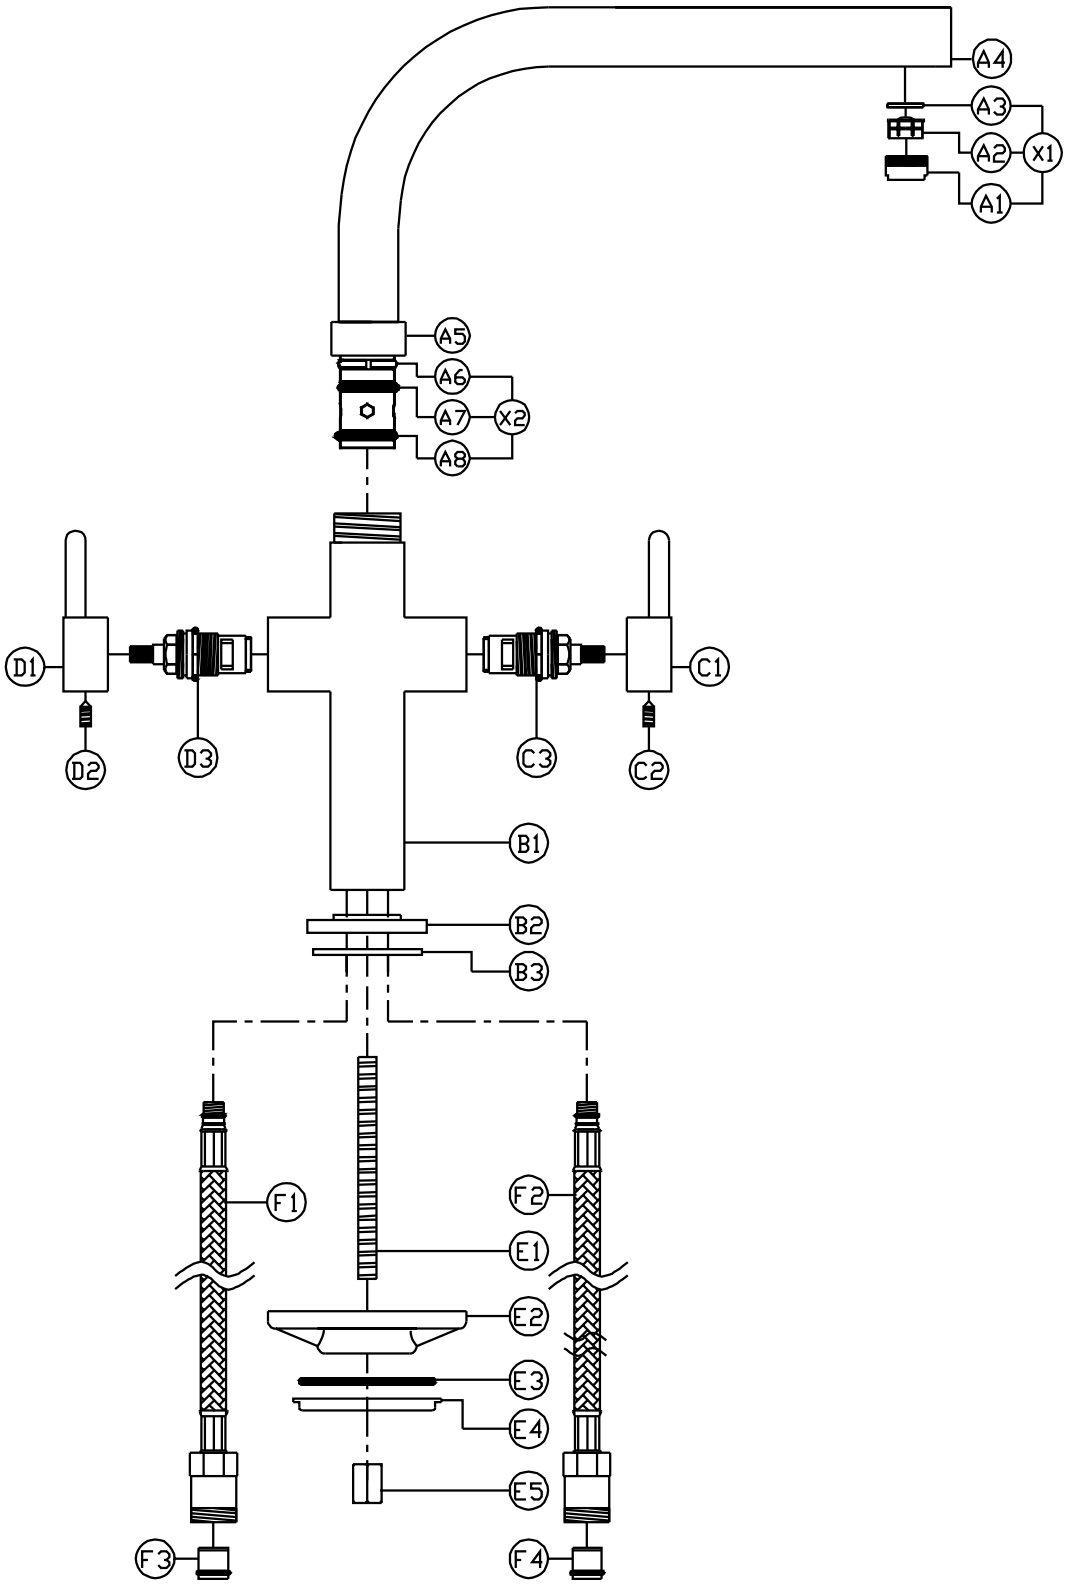

LAMONA
Exclusive to Howdens Joinery Co.

TAP3590 - Lugano Tap (Chrome) service drawing v1

(c) abode home products ltd
www.abode.eu

our policy is to continually improve and develop products, and accordingly we reserve the right to amend specifications without prior notice

© Abode Home Products Limited

TAP3590 – Lugano monobloc

General Advice:

- These instructions are intended as a guide only, if you are in any doubt you should seek the advice of a qualified professional.
- Take care not to mark finished parts with screwdrivers or other tools.
- Use a pair of rubber gloves to get a better grip on decorative hand tight parts.
- Ensure all parts are reassembled tightly.
- After maintenance test that all assemblies are water tight and function correctly.
- Always isolate the hot and cold water supplies before starting any maintenance, once isolated you should drain any residual water from your system.

To replace the hot valve:

1. Unscrew the grub screw (D2) using an allen key.
2. Pull the handle (D1) vertically away from the tap body (B1).
3. Holding the tap body (B1) unscrew the valve (D3) using a 17mm ring spanner or adjustable wrench.
4. Clean any debris from the chamber in the tap body (B1).
5. Reassemble the tap in the reverse order.

To replace the spout o-rings:

1. Whilst holding body (B1) unscrew the spout locking collar (A5)
2. Pull the spout (A4) vertically away from the body (B1).
3. Remove the old o-rings (A7 & A8) using a small screwdriver or similar.
4. If worn, remove the white PTFE spacer (A6).
5. Ensure the inside of the body (B1) and the spout base (A4) is clean of dirt and grit with a soft wet cloth.
6. If required locate the new white PTFE spacer (A6).
7. Carefully locate the new O-rings (A7 & A8) onto the spout base (A4).
8. Grease the O-rings (A7 & A8) thoroughly with silicone or alternative similar grease.
9. Reassemble the tap in the reverse order.

© Abode Home Products Limited