



**CHATSWORTH  
PRODUCTS**



# Universal Cable Runway

## Universal Cable Runway

Our most popular cable runway is designed for value conscious customers. The Universal Cable Runway offers the industry standard features you've come to expect. With the runway supported every 5' (1.5 m), maximum load with minimal deflection is 132 lb/ft (59.9 kg).

- Made of 3/8" x 1-1/2" x .065" (9.53 mm x 38 mm x 1.65 mm) wall rectangular steel tubing
- Cross members welded at 12" (300 mm) intervals
- Individually boxed to prevent scratches and damage
- Standard length is 9'-11 1/2"/119.5" (3035 mm)
- Installation Best Practices includes Runway Elevation Kit
- U.L. classified for suitability as an equipment grounding conductor (must remove paint from side stringers or use grounding strap)
- 11301 Butt-Splice Kit Installation Instructions [chatsworth.com](https://www.chatsworth.com)

*NOTE: CPI 10250, 11252, 11275 and 14300 cable runway systems are listed under UL E138966 and tested to the requirements in the Standard for Safety for Metal Cable Tray Systems, NEMA VE 1-2017 and ANSI/NFPA 70.*

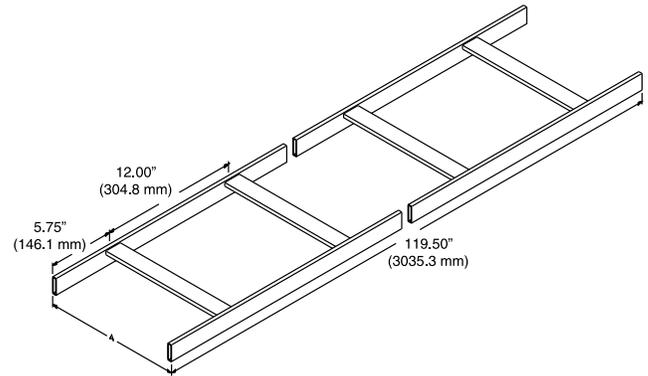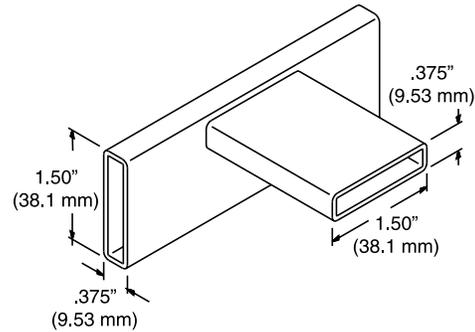

## ORDERING INFORMATION

Part Number	Width (Dim. A) in (mm)	Shipping Weight lb (kg)
10250-X04	4 (100)	18 (8.2)
10250-X06	6 (150)	19 (8.6)
10250-X09	9 (230)	20 (9.1)
10250-X12	12 (300)	25 (11.3)
10250-X15	15 (380)	27 (12.2)
10250-X18	18 (460)	29 (13.2)
10250-X24	24 (610)	32 (14.5)
10250-X31	30 (760)	35 (15.7)
10250-X37	36 (910)	38 (17.2)

X=color; 1=Gray, 7=Black, E=Glacier White.

**United States & Canada**  
 Simi Valley, CA  
 800-834-4969  
 Toronto, Ontario, Canada  
 +905-850-7770  
[chatsworth.com](https://www.chatsworth.com)  
[techsupport@chatsworth.com](mailto:techsupport@chatsworth.com)

**Latin America**  
 Mexico City, Mexico  
 +52-55-5203-7525  
 Toll Free within Mexico  
 800-201-7592  
[chatsworth.com](https://www.chatsworth.com)

**Europe**  
 Buckinghamshire  
 England, UK  
 +44-1628-524-834

**Middle East & Africa**  
 Dubai, UAE  
 +971-4-2602125  
 Doha, Qatar  
 +974-4-267422

**Asia Pacific**  
 Jing'an District,  
 Shanghai, China  
 +86 21 6880-0266  
[chatsworth.com.cn](https://www.chatsworth.com.cn)



**CHATSWORTH  
PRODUCTS**

# Cable Runway Load-Span Table

Maximum load with minimal deflection is 132 lb/ft when the runway is supported every 5'.

## Load-Span Table, CPI Cable Runway

Safety Factor	Span (ft)	4	5	6	7	8	9
1.5	Maximum Load (lb/ft)	206	132	92	67	52	41
	Defection (in)	0.41	0.64	0.92	1.25	1.62	2.03
2.0	Maximum Load (lb/ft)	154	99	69	50	39	31
	Defection (in)	0.31	0.48	0.68	0.93	1.21	1.531
	K factor	0.002	0.005	0.010	0.019	0.032	0.050

CPI recommends supporting cable runway runs every 5 feet.

To calculate deflection for loads lighter than maximum loads listed in table, multiply load for which deflection is desired by K factor listed in table for cable runway support span utilized.

Example: To calculate maximum deflection using a safety factor of 1.5 for a length of cable runway supported every 5' and loaded with 80 pounds per foot:

$$\text{Defection} = (80) (0.005) = 0.40''$$

NOTE: CPI 10250, 11252, 11275 and 14300 cable runway systems are listed under UL E138966 and tested to the requirements in the Standard for Safety for Metal Cable Tray Systems, NEMA VE 1-2017 and ANSI/NFPA 70.

**United States & Canada**  
 Simi Valley, CA  
 800-834-4969  
 Toronto, Ontario, Canada  
 +905-850-7770  
 chatsworth.com  
 techsupport@chatsworth.com

**Latin America**  
 Mexico City, Mexico  
 +52-55-5203-7525  
 Toll Free within Mexico  
 800-201-7592  
 chatsworth.com.co

**Europe**  
 Buckinghamshire  
 England, UK  
 +44-1628-524-834

**Middle East & Africa**  
 Dubai, UAE  
 +971-4-2602125  
 Doha, Qatar  
 +974-4-267422

**Asia Pacific**  
 Jing'an District,  
 Shanghai, China  
 +86 21 6880-0266  
 chatsworth.com.cn