



Urinal & Flushometer Combo

WEUS-1700.3001-STG

Product description

SloanTec® Glaze, SU-1009 Urinal and ROYAL 186 ESS Flushometer.

Compliances & Certifications



(BAA Compliant, BABAA Compliant, BREEAM Materials Credit, CalGreen Compliant, CEC Compliant, EPD, Green Globes Credit, HPD, LEED Credit, LEED HPD, Satisfies LEED Credits)

Code 17003001

Downloads

- [Standard Spud Urinal Installation Instructions.pdf](#)
- [Royal ESS TMO Installation Instructions.pdf](#)
- [Additional Downloads](#)

Videos

- [Sloan – Company Overview](#)

Details

- Flush Volume: 0.125 gpf (0.5 lpf)

Features

- Sensor-activated, hardwired urinal flushometer
- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- Durability is facilitated with high copper, low zinc brass castings for dezincification resistance
- Adjustable tailpiece
- Critical components, including cover, valve body, control stop and sweat solder kit, are made of semi-red brass
- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037
- Designed to maximize and complement Sloan flushometers
- Universal high-efficiency model works with 0.125, 0.25 and 0.5 gpf Sloan flushometers
- Thorough washdown flushing action
- Durable, hygienic vitreous china construction
- Vandal resistant stainless steel strainer included
- IAPMO certified to meet or exceed ASME A112.19.2 standards
- Water Sense listed by EPA that qualifies for most rebate programs
- Meets ADA guidelines and ANSI A117.1 requirements when installed accordingly
- Permanent SloanTec® hydrophobic antimicrobial glaze inhibits the growth and buildup of germs, bacteria, mold, mildew and mineral scale on the surfaces

Components



- Flushometer: Code 3452643
- Urinal: Code 1171009

Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.

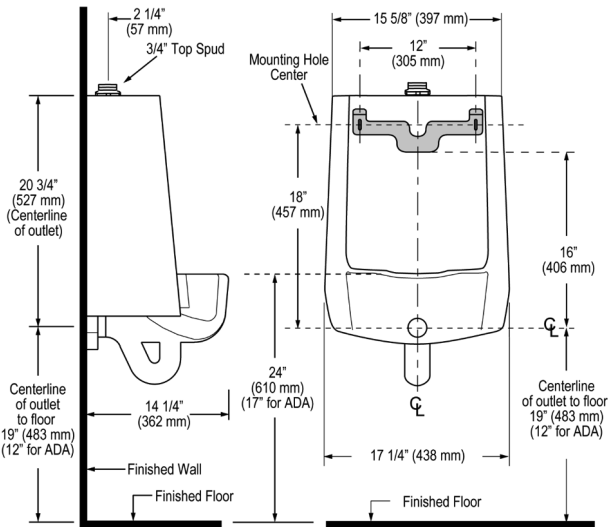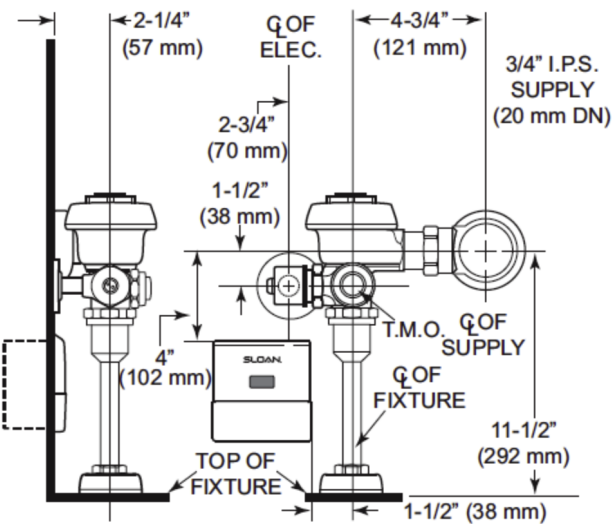

NOTE: ADA urinal rim height requirements allow all heights 17" and below. Sloan strongly recommends roughing in the drain to achieve a 16 1/2" rim height or less to ensure compliance.