

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

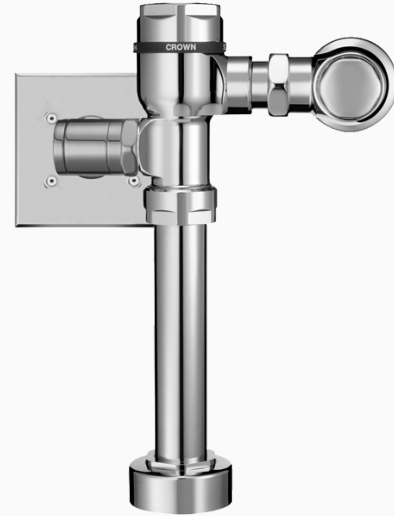


Image for a standard CROWN 111 ES shown

DESCRIPTION

Crown® Exposed Solenoid (less sensor) Hardwired Water Closet Flushometer

FEATURES

- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

DOWNLOADS

- [Crown/Crown II Sensor Activated Exposed Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Crown/Crown II Repair and Maintenance Guide](#)
- [Optima ESS Repair and Maintenance Guide](#)
- [ES 24V-120V Exposed Flushometers Repair and Maint Guide](#)
- [Crown Piston Assembly Repair Kit](#)
- [Additional Downloads](#)