


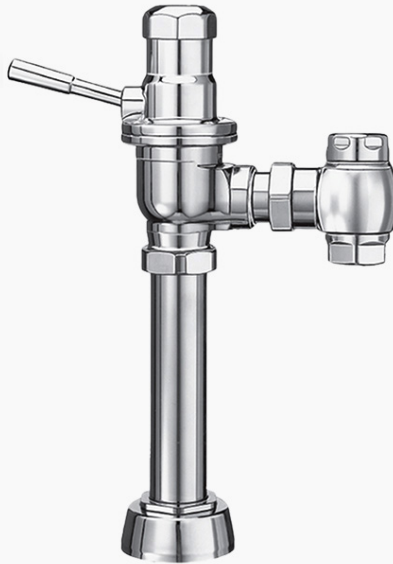

Variation Not Shown: Back of Valve Inlet

Dolphin Manual Flushometer

DOLPHIN TYPE I CLASS B-1.6-GJ-CP

Product description

1.6 gpf, Polished Chrome Finish, Fixture Connection Top Spud, Single Flush, 1" Inlet, Ground Joint Control Stop, Dolphin Exposed Manual Water Closet Flushometer.

Compliances & Certifications



(BAA Compliant, BABAA Compliant, Made in the USA)

Code 3057002

Finish



Polished Chrome (CP)

Downloads

- [Dolphin Standard Exposed Installation Instructions.pdf](#)
- [Control Stop Repair and Maintenance Guide.pdf](#)
- [Flush Connections Flanges Repair and Maintenance Guide.pdf](#)
- [Additional Downloads](#)

Videos

- [Sloan - Company Overview](#)

Product Information

Details

- Flush Volume: 1.6 gpf (6.0 lpf)
 - Finish: Polished Chrome (CP)
 - Valve: Piston
 - Valve Body Material: Red Brass
 - Fixture Type: Water Closet
 - Fixture Connection: Top Spud
 - Control Stop: Ground Joint (GJ)
-

Features

- NA
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037

DOLPHIN TYPE I CLASS B-1.6-GJ-CP

Recommended specifications

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

Valve Operating Pressure (Flowing)

15-80 psi (103 - 552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.

Looking for other variations of the DOLPHIN TYPE I CLASS B product? [View the general spec sheet with all options.](#)

[Find a compatible urinal](#) for this flushometer.

[Find a compatible water closet](#) for this flushometer.

